



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

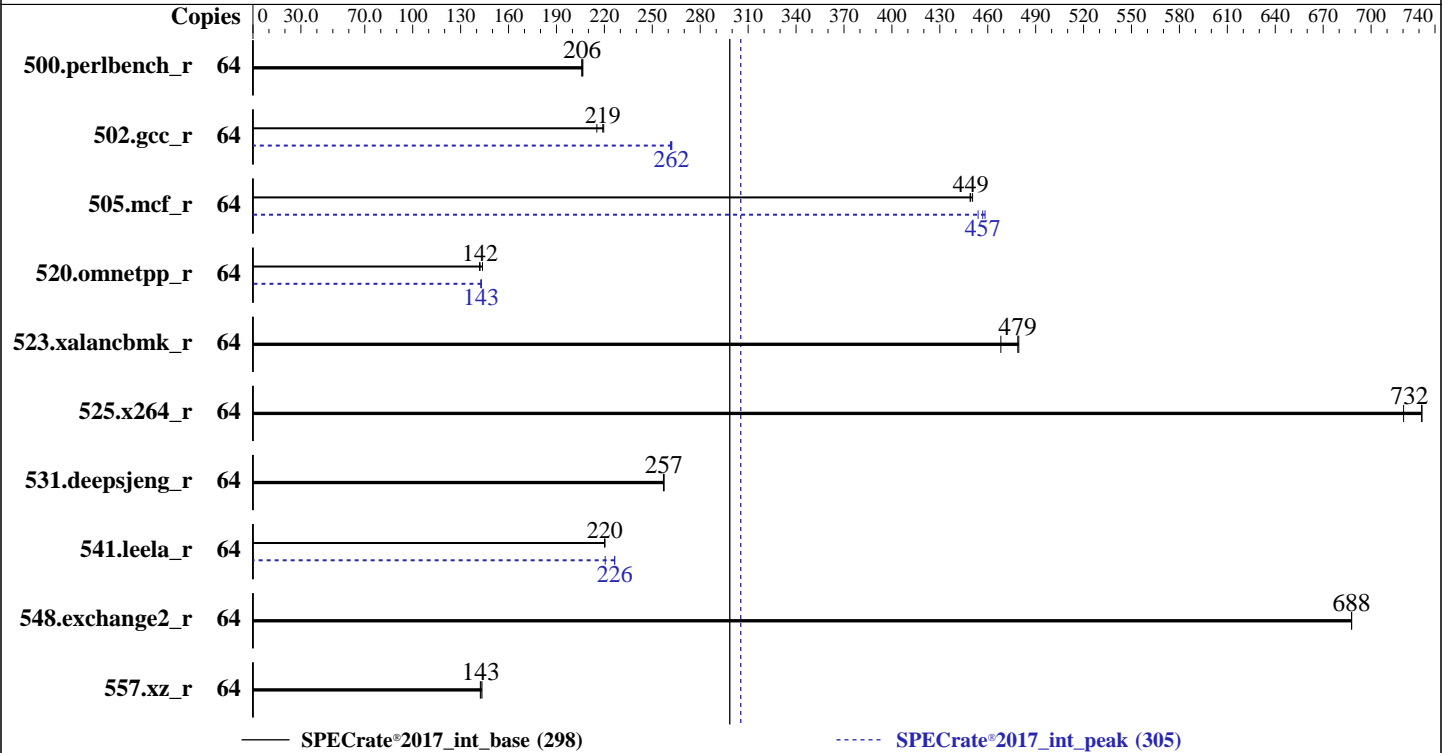

Hardware

CPU Name: AMD EPYC 8324P
 Max MHz: 3000
 Nominal: 2650
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 192 GB (6 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version v1.20 08/09/2024 released
 Aug-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	495	206	494	206	493	207	64	495	206	494	206	493	207
502.gcc_r	64	414	219	421	215	413	220	64	346	262	346	262	347	261
505.mcf_r	64	230	449	230	449	230	451	64	226	457	228	454	226	458
520.omnetpp_r	64	592	142	584	144	591	142	64	587	143	588	143	588	143
523.xalancbmk_r	64	141	479	141	479	144	468	64	141	479	141	479	144	468
525.x264_r	64	153	732	156	720	153	732	64	153	732	156	720	153	732
531.deepsjeng_r	64	285	257	285	257	285	257	64	285	257	285	257	285	257
541.leela_r	64	481	220	481	220	481	220	64	468	226	468	226	481	221
548.exchange2_r	64	244	688	244	688	244	688	64	244	688	244	688	244	688
557.xz_r	64	486	142	482	143	484	143	64	486	142	482	143	484	143

SPECrate®2017_int_base = **298**

SPECrate®2017_int_peak = **305**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate[®]2017_int_base = 298

SPECrate[®]2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
AMD Periodic Directory Rinse Tuning set to Cache-Bound
Memory Patrol Scrubbing set to Disabled
NUMA memory domains per socket set to Two memory domains per socket
ACPI CST C2 Latency set to 18 microseconds
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Power Regulator set to OS Control Mode
The reference code/AGESA version used in this ROM is version Siena-PI 1.0.0

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Oct 30 13:56:08 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
13:56:08 up 3 min, 3 users, load average: 0.09, 0.06, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 772334
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 772334
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/intrate.sh
python3 ./run_intrrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/CPU2017

6. /proc/cpuinfo
model name : AMD EPYC 8324P 32-Core Processor

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

```
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00215
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsrso
TLB size       : 3584 4K pages
cpu cores      : 32
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-63
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 8324P 32-Core Processor
BIOS Model name:      AMD EPYC 8324P 32-Core Processor
BIOS CPU family:      107
CPU family:            25
Model:                 160
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             1
Stepping:              2
Frequency boost:       enabled
CPU(s) scaling MHz:    102%
CPU max MHz:           2650.0000
CPU min MHz:           1500.0000
BogoMIPS:              5292.15
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cpcp arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl nmhi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

```

Virtualization:          debug_swap
                          AMD-V
L1d cache:              1 MiB (32 instances)
L1i cache:              1 MiB (32 instances)
L2 cache:               32 MiB (32 instances)
L3 cache:               128 MiB (8 instances)
NUMA node(s):          2
NUMA node0 CPU(s):     0-15,32-47
NUMA node1 CPU(s):     16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Melttdown:          Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:    Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 96448 MB
node 0 free: 95959 MB
node 1 cpus: 16-31,48-63
node 1 size: 96660 MB
node 1 free: 96122 MB
node distances:
node  0  1
  0:  10  12
  1:  12  10

```

9. /proc/meminfo

MemTotal: 197743216 kB

10. who -r

run-level 3 Oct 30 13:55

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
                rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
                serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
                systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect       systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=fe97c644-1alb-45c1-9618-5870ddb81128
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 61:
  current policy: frequency should be within 1.50 GHz and 2.65 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none            511
   max_ptes_shared          256
   max_ptes_swap            64
   pages_to_scan            4096
   scan_sleep_millisecs     10000
-----
```

```
-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/CPU2017
  Filesystem      Type      Size      Used Avail Use% Mounted on
  /dev/sda3       btrfs    446G      73G  370G  17% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
   Vendor:          HPE
   Product:         ProLiant DL145 Gen11
   Product Family: ProLiant
   Serial:          41600016J0A1
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  6x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      HPE
  BIOS Version:     1.20
  BIOS Date:        08/09/2024
  BIOS Revision:    1.20
  Firmware Revision: 1.62
-----
```

Compiler Version Notes

=====
C | 502.gcc_r(peak)

```
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C | 502.gcc_r(peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flt0
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamplib -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2024
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

-ldl

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-mllvm -unroll-threshold=100

-mllvm -reduce-array-computations=3 -zopt -fno-PIE

-no-pie -fvirtual-function-elimination -fvisibility=hidden

-mllvm -do-block-reorder=advanced -lamdlibm -lflang

-lamdalloc-ext -ldl

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Siena-rev1.0.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.65 GHz, AMD EPYC 8324P)

SPECrate®2017_int_base = 298

SPECrate®2017_int_peak = 305

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-30 04:26:08-0400.

Report generated on 2024-11-20 11:04:27 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.