



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

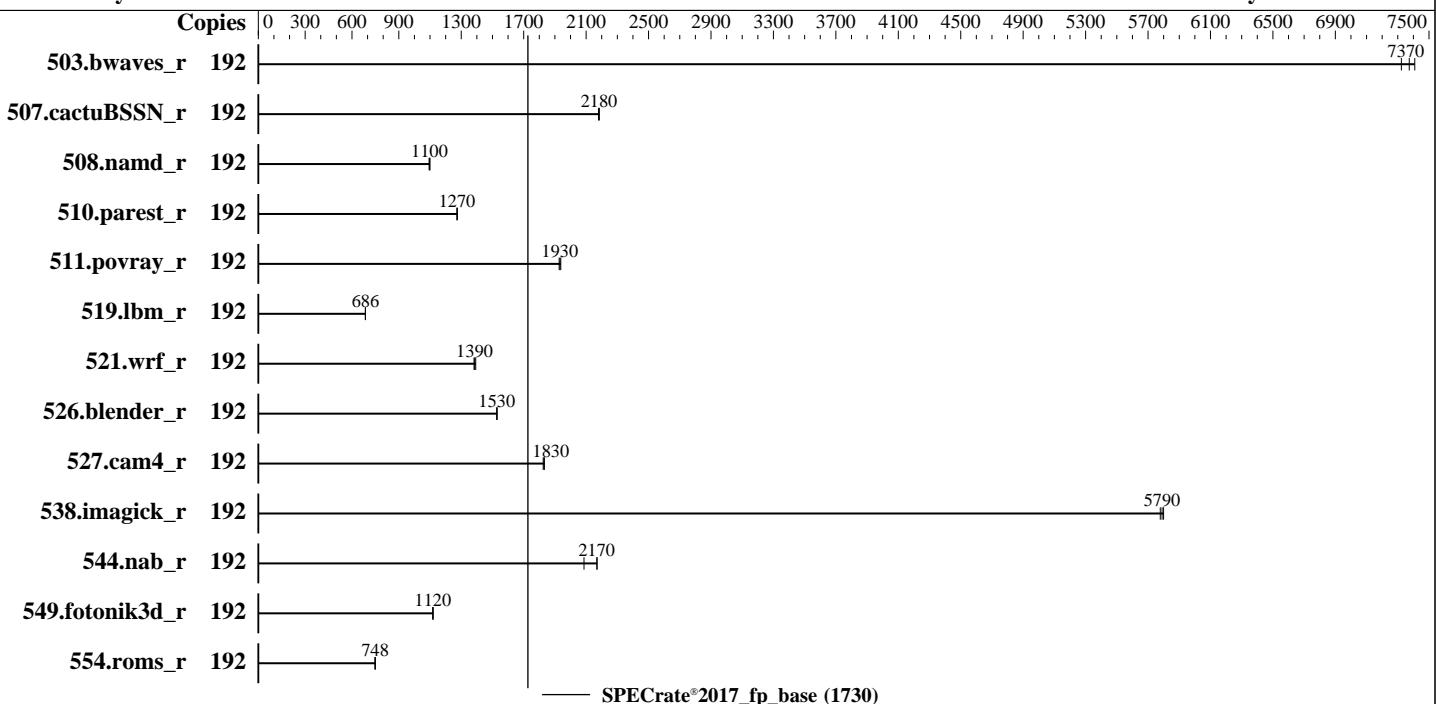

### Hardware

CPU Name: Intel Xeon Platinum 8468H  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 192 cores, 4 chips  
 Orderable: 1,2,4 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Compiler: 5.14.0-70.13.1.el9\_0.x86\_64  
 C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.02.02.05 released Oct-2024  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

**SPECrate®2017\_fp\_base = 1730**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	263	7320	<b>261</b>	<b>7370</b>	260	7410							
507.cactusBSSN_r	192	112	2180	<b>111</b>	<b>2180</b>	111	2180							
508.namd_r	192	<b>166</b>	<b>1100</b>	166	1100	167	1090							
510.parest_r	192	394	1270	<b>394</b>	<b>1270</b>	394	1270							
511.povray_r	192	<b>232</b>	<b>1930</b>	233	1930	231	1940							
519.lbm_r	192	295	686	<b>295</b>	<b>686</b>	295	686							
521.wrf_r	192	309	1390	<b>310</b>	<b>1390</b>	311	1380							
526.blender_r	192	191	1530	191	1530	<b>191</b>	<b>1530</b>							
527.cam4_r	192	<b>183</b>	<b>1830</b>	183	1830	184	1830							
538.imagick_r	192	<b>82.5</b>	<b>5790</b>	82.6	5780	82.3	5800							
544.nab_r	192	155	2090	<b>149</b>	<b>2170</b>	149	2170							
549.fotonik3d_r	192	669	1120	<b>669</b>	<b>1120</b>	668	1120							
554.roms_r	192	408	748	<b>408</b>	<b>748</b>	407	750							

**SPECrate®2017\_fp\_base = 1730**

**SPECrate®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enable SNC4 (4-clusters)

Intel Hyper-Threading set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Dec 9 10:27:07 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 250 (250-6.el9\_0)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64 x86\_64 GNU/Linux

2. w  
10:27:07 up 2 days, 16:54, 1 user, load average: 0.06, 0.01, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Platform Notes (Continued)

```
root      pts/0      10:22   27.00s  0.93s  0.07s -bash

-----
3. Username
From environment variable $USER: root

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4125058
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 4125058
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 192 -c ic2024.0.2-lin-sierraforest-rate-20231213.cfg
--define smt-on --define cores=96 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base -o all fprate
runcpu --define default-platform-flags --copies 192 --configfile
ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size reffrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.032/templogs/preenv.fprate.032.0.log --lognum 032.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000590
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings        : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Platform Notes (Continued)

```
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8468H
BIOS Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 4
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperf fmperf tsc_known_freq pn1 pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vmmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
amx_tile flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 9 MiB (192 instances)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Platform Notes (Continued)

L1i cache: 6 MiB (192 instances)  
L2 cache: 384 MiB (192 instances)  
L3 cache: 420 MiB (4 instances)  
NUMA node(s): 16  
NUMA node0 CPU(s): 0-11  
NUMA node1 CPU(s): 12-23  
NUMA node2 CPU(s): 24-35  
NUMA node3 CPU(s): 36-47  
NUMA node4 CPU(s): 48-59  
NUMA node5 CPU(s): 60-71  
NUMA node6 CPU(s): 72-83  
NUMA node7 CPU(s): 84-95  
NUMA node8 CPU(s): 96-107  
NUMA node9 CPU(s): 108-119  
NUMA node10 CPU(s): 120-131  
NUMA node11 CPU(s): 132-143  
NUMA node12 CPU(s): 144-155  
NUMA node13 CPU(s): 156-167  
NUMA node14 CPU(s): 168-179  
NUMA node15 CPU(s): 180-191  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:  

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

-----  
8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 16 nodes (0-15)  
node 0 cpus: 0-11  
node 0 size: 63741 MB  
node 0 free: 63119 MB  
node 1 cpus: 12-23  
node 1 size: 64509 MB  
node 1 free: 63989 MB  
node 2 cpus: 24-35  
node 2 size: 64509 MB  
node 2 free: 63797 MB  
node 3 cpus: 36-47  
node 3 size: 64509 MB  
node 3 free: 63990 MB  
node 4 cpus: 48-59  
node 4 size: 64509 MB  
node 4 free: 63292 MB  
node 5 cpus: 60-71  
node 5 size: 64509 MB  
node 5 free: 63969 MB  
node 6 cpus: 72-83

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 1730

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Platform Notes (Continued)

```
node 6 size: 64509 MB
node 6 free: 63976 MB
node 7 cpus: 84-95
node 7 size: 64509 MB
node 7 free: 63812 MB
node 8 cpus: 96-107
node 8 size: 64509 MB
node 8 free: 63958 MB
node 9 cpus: 108-119
node 9 size: 64509 MB
node 9 free: 63977 MB
node 10 cpus: 120-131
node 10 size: 64509 MB
node 10 free: 63984 MB
node 11 cpus: 132-143
node 11 size: 64472 MB
node 11 free: 63950 MB
node 12 cpus: 144-155
node 12 size: 64509 MB
node 12 free: 63980 MB
node 13 cpus: 156-167
node 13 size: 64509 MB
node 13 free: 64002 MB
node 14 cpus: 168-179
node 14 size: 64509 MB
node 14 free: 63991 MB
node 15 cpus: 180-191
node 15 size: 64489 MB
node 15 free: 63963 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  1: 12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  2: 12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
  3: 12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
  4: 21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
  5: 21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
  6: 21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
  7: 21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
  8: 21  21  21  21  21  21  21  10  12  12  12  12  21  21  21  21
  9: 21  21  21  21  21  21  21  12  10  12  12  12  21  21  21  21
 10: 21  21  21  21  21  21  21  12  12  10  12  21  21  21  21  21
 11: 21  21  21  21  21  21  21  21  12  12  10  21  21  21  21  21
 12: 21  21  21  21  21  21  21  21  21  21  10  12  12  12  12  12
 13: 21  21  21  21  21  21  21  21  21  21  12  10  12  12  12  12
 14: 21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
 15: 21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1056076856 kB
```

```
-----  
10. who -r  
run-level 5 Dec 6 17:33
```

```
-----  
11. Systemd service manager version: systemd 250 (250-6.el9_0)  
Default Target Status  
graphical degraded
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* dnf-makecache.service loaded failed dnf makecache

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online  
accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm  
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt  
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname  
nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd  
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control  
systemd-network-generator tuned udisks2 upower vgaauthd vmtoolsd  
enabled-runtime systemd-remount-fs  
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower  
cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit ipruleupdate  
iscsicd iscsiuio kpatch kvm\_stat ledmon man-db-restart-cache-update nftables  
nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon  
rdisc rhcd rhsm facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@  
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa\_supplicant  
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet  
nohz\_full=1-383

15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.80 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

16. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: latency-performance

17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Platform Notes (Continued)

```
vm.dirty_background_ratio      10
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage  
    defrag      always defer defer+madvise [madvise] never  
    enabled     [always] madvise never  
    hpage_pmd_size 2097152  
    shmem_enabled always within_size advise [never] deny force
```

```
-----  
19. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs 60000  
    defrag                 1  
    max_ptes_none          511  
    max_ptes_shared         256  
    max_ptes_swap           64  
    pages_to_scan           4096  
    scan_sleep_millisecs   10000
```

```
-----  
20. OS release  
    From /etc/*-release /etc/*-version  
    os-release  Red Hat Enterprise Linux 9.0 (Plow)  
    redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
    system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----  
21. Disk information  
    SPEC is set to: /home/cpu2017  
    Filesystem      Type  Size  Used Avail Use% Mounted on  
    /dev/mapper/rhel-home xfs   201G   24G  177G  12% /home
```

```
-----  
22. /sys/devices/virtual/dmi/id  
    Vendor:        XFUSION  
    Product:       2488H V7  
    Product Family: EagleStream
```

```
-----  
23. dmidecode  
    Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
    "DMTF SMBIOS" standard.
```

Memory:

32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 01.02.02.05  
BIOS Date: 10/17/2024

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xserraforest -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 1730

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-08 21:27:06-0500.

Report generated on 2025-01-28 15:47:27 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.