



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11


(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

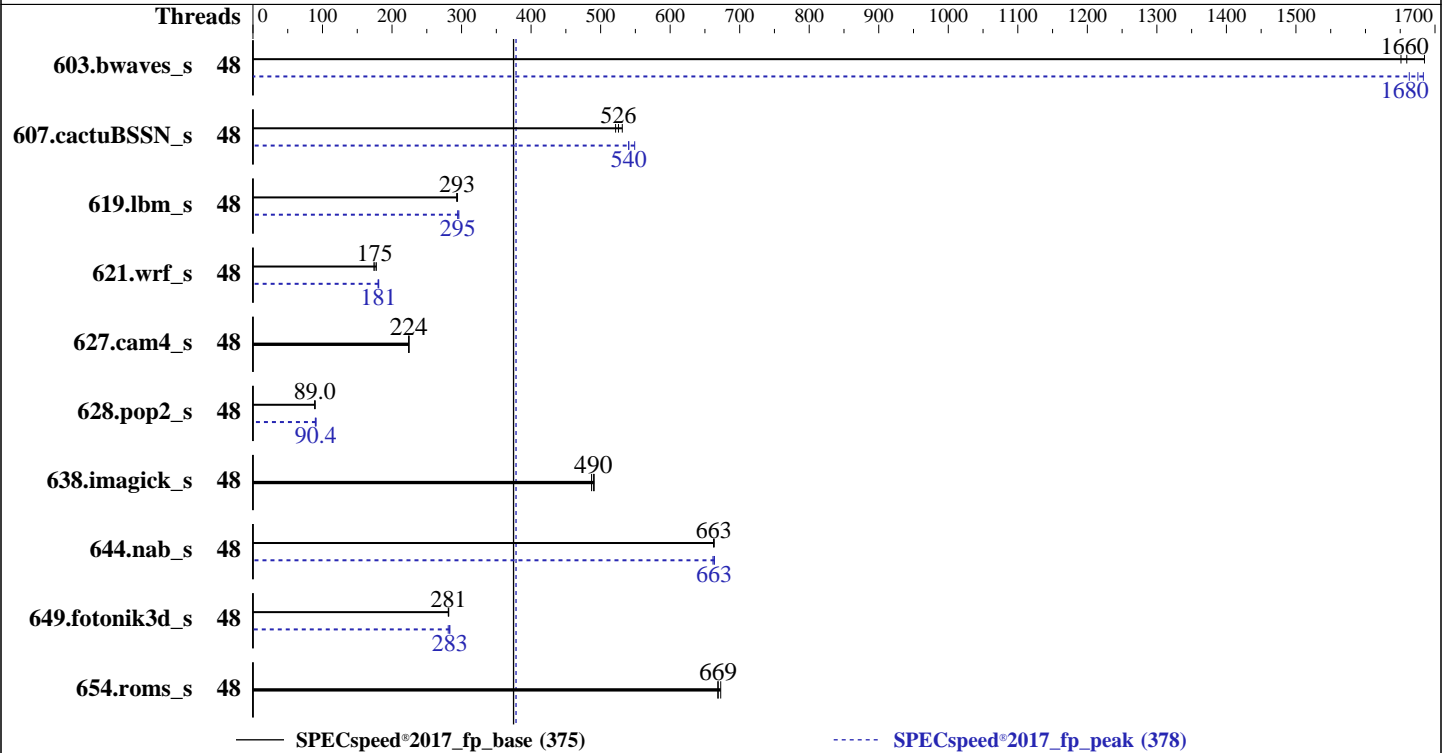

Hardware

CPU Name: AMD EPYC 9255
 Max MHz: 4300
 Nominal: 3250
 Enabled: 48 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,
 running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version v2.20 10/31/2024 released
 Oct-2024
 File System: btrfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	<u>35.6</u>	<u>1660</u>	35.7	1650	35.0	1680	48	<u>35.2</u>	<u>1680</u>	35.0	1680	35.5	1660
607.cactuBSSN_s	48	32.0	522	31.4	531	<u>31.7</u>	<u>526</u>	48	<u>30.8</u>	<u>540</u>	30.8	540	30.4	549
619.lbm_s	48	17.8	294	<u>17.8</u>	<u>293</u>	17.9	293	48	17.7	296	<u>17.8</u>	<u>295</u>	17.8	295
621.wrf_s	48	74.5	177	<u>75.4</u>	<u>175</u>	76.0	174	48	73.2	181	73.5	180	<u>73.2</u>	<u>181</u>
627.cam4_s	48	39.6	224	<u>39.5</u>	<u>224</u>	39.5	224	48	39.6	224	<u>39.5</u>	<u>224</u>	39.5	224
628.pop2_s	48	134	88.8	133	89.4	<u>133</u>	<u>89.0</u>	48	132	89.7	131	90.6	<u>131</u>	<u>90.4</u>
638.imagick_s	48	29.4	491	29.6	487	<u>29.5</u>	<u>490</u>	48	29.4	491	29.6	487	<u>29.5</u>	<u>490</u>
644.nab_s	48	26.4	663	26.3	663	<u>26.4</u>	<u>663</u>	48	26.3	664	26.4	662	<u>26.3</u>	<u>663</u>
649.fotonik3d_s	48	<u>32.4</u>	<u>281</u>	32.4	282	32.4	281	48	32.5	281	<u>32.2</u>	<u>283</u>	32.2	283
654.roms_s	48	23.6	669	23.4	673	<u>23.5</u>	<u>669</u>	48	23.6	669	23.4	673	<u>23.5</u>	<u>669</u>

SPECspeed®2017_fp_base = **375**

SPECspeed®2017_fp_peak = **378**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH =
  "/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib
  /lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

```
BIOS Configuration
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
ACPI CST C2 Latency set to 18 microseconds
Thermal Configuration set to Maximum Cooling
AMD SMT Option set to Disabled
Workload Profile set to Custom
Power Regulator set to OS Control Mode
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

```
Sysinfo program /home/cpu2017_new/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Dec 9 16:51:57 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/1p)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
16:51:57 up 2 min, 3 users, load average: 0.51, 0.92, 0.43
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      pts/0    172.17.1.96   16:51      13.00s     0.82s  0.07s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094733
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 3094733
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.011/templogs/preenv.fpspeed.011.0.log --lognum 011.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9255 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 24
siblings       : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-5,8-13,16-21,24-29
physical id 1: apicids 32-37,40-45,48-53,56-61
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      48
On-line CPU(s) list:         0-47
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9255 24-Core Processor

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

BIOS Model name:          AMD EPYC 9255 24-Core Processor          CPU @ 3.2GHz
BIOS CPU family:         107
CPU family:               26
Model:                    2
Thread(s) per core:      1
Core(s) per socket:      24
Socket(s):                2
Stepping:                 1
Frequency boost:         enabled
CPU(s) scaling MHz:      102%
CPU max MHz:              3200.0000
CPU min MHz:              1500.0000
BogoMIPS:                 6389.74
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                          rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                          extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                          sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                          cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                          perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                          ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                          smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                          xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                          xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                          nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                          pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
                          avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg avx512_vpoperntdq la57 rdpid bus_lock_detect
                          movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                          flush_lld debug_swap

Virtualization:          AMD-V
L1d cache:               2.3 MiB (48 instances)
L1i cache:               1.5 MiB (48 instances)
L2 cache:                48 MiB (48 instances)
L3 cache:                256 MiB (8 instances)
NUMA node(s):            2
NUMA node0 CPU(s):       0-23
NUMA node1 CPU(s):       24-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:              Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  disabled; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:    Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d      48K      2.3M   12 Data      1      64      1              64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Platform Notes (Continued)

L1i	32K	1.5M	8 Instruction	1	64	1	64
L2	1M	48M	16 Unified	2	1024	1	64
L3	32M	256M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-23
node 0 size: 386711 MB
node 0 free: 385614 MB
node 1 cpus: 24-47
node 1 size: 387001 MB
node 1 free: 385859 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

9. /proc/meminfo

MemTotal: 792282712 kB

10. who -r

run-level 5 Dec 9 16:49

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target  Status
graphical      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
                exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
                omtree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
                systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect      pcsd saned@ systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9579ceda-034d-4a9c-a590-1ac3c83e5f78
splash=silent
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 26:

current policy: frequency should be within 1.50 GHz and 3.20 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

20. Disk information

SPEC is set to: /home/cpu2017_new

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdd2	btrfs	447G	33G	411G	8%	/home

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:    ProLiant DL385 Gen11
Product Family: ProLiant
Serial:     DL385G11-003
```

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:    HPE
BIOS Version:   2.20
BIOS Date:      10/31/2024
BIOS Revision:  2.20
Firmware Revision: 1.63
```

Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Compiler Version Notes (Continued)

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlIBM -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlIBM -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlIBM -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlIBM -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: basepeak = yes

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang
```

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Oct-2024

Peak Optimization Flags (Continued)

621.wrf_s (continued):

-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.25 GHz, AMD EPYC 9255)

SPECspeed®2017_fp_base = 375

SPECspeed®2017_fp_peak = 378

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-09 06:21:57-0500.

Report generated on 2025-01-28 22:04:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.