



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

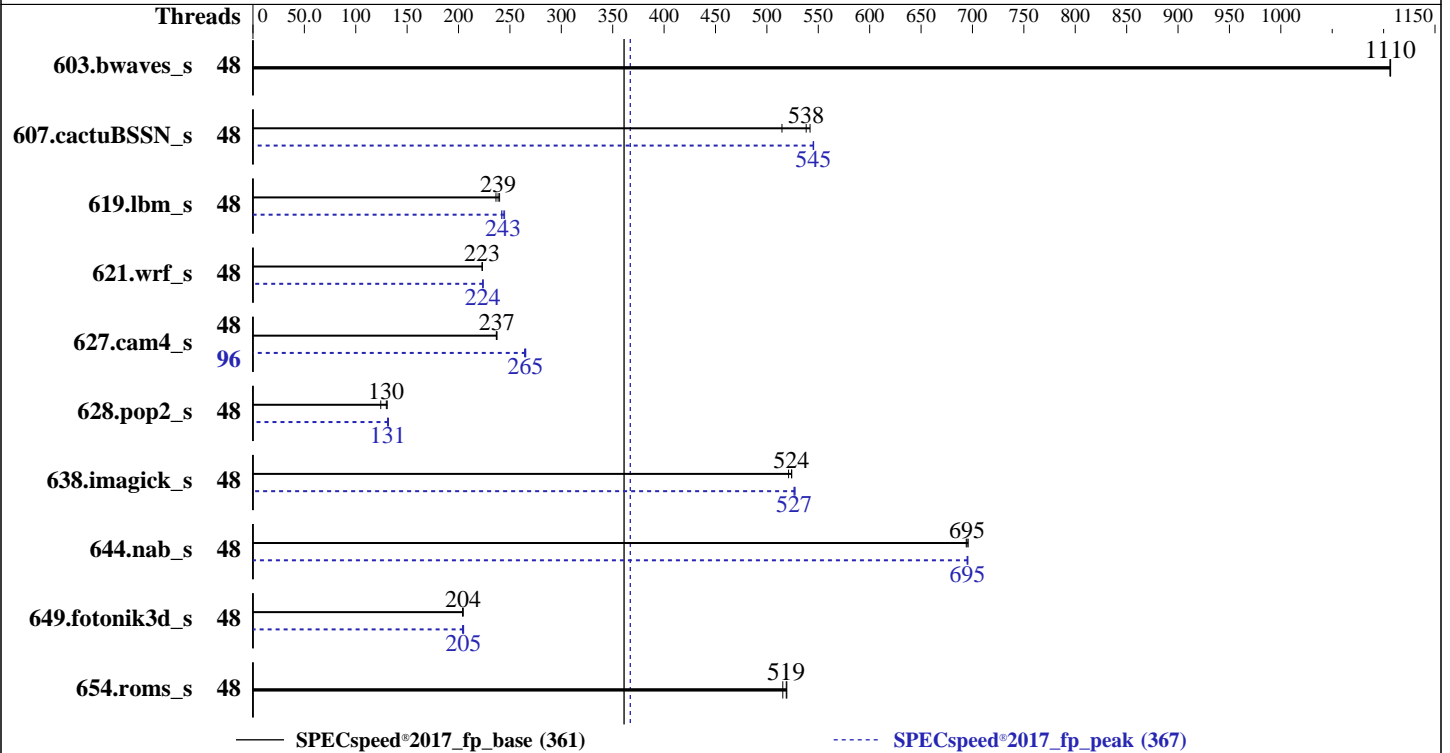

Hardware

CPU Name: AMD EPYC 9475F
 Max MHz: 4800
 Nominal: 3650
 Enabled: 48 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
 Kernel 5.14.0-427.13.1.el9_4.x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECSpeed®2017_fp_base = 361

SPECSpeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	53.3	1110	<u>53.3</u>	<u>1110</u>	53.3	1110	48	53.3	1110	<u>53.3</u>	<u>1110</u>	53.3	1110
607.cactuBSSN_s	48	30.8	542	32.4	515	<u>31.0</u>	<u>538</u>	48	30.6	546	<u>30.6</u>	<u>545</u>	30.6	545
619.lbm_s	48	21.8	240	<u>22.0</u>	<u>239</u>	22.2	236	48	21.7	242	<u>21.5</u>	<u>243</u>	21.4	245
621.wrf_s	48	<u>59.3</u>	<u>223</u>	59.3	223	59.3	223	48	59.2	224	<u>59.1</u>	<u>224</u>	59.0	224
627.cam4_s	48	37.3	237	37.4	237	<u>37.4</u>	<u>237</u>	96	<u>33.4</u>	<u>265</u>	33.5	264	33.4	265
628.pop2_s	48	<u>91.5</u>	<u>130</u>	95.5	124	90.9	131	48	<u>90.5</u>	<u>131</u>	90.6	131	90.0	132
638.imagick_s	48	<u>27.5</u>	<u>524</u>	27.5	524	27.7	521	48	27.4	527	27.4	526	<u>27.4</u>	<u>527</u>
644.nab_s	48	25.1	696	25.2	694	<u>25.1</u>	<u>695</u>	48	25.1	695	25.1	696	<u>25.1</u>	<u>695</u>
649.fotonik3d_s	48	44.7	204	44.6	204	<u>44.6</u>	<u>204</u>	48	44.7	204	<u>44.5</u>	<u>205</u>	44.5	205
654.roms_s	48	30.5	515	30.3	519	<u>30.3</u>	<u>519</u>	48	30.5	515	30.3	519	<u>30.3</u>	<u>519</u>

SPECSpeed®2017_fp_base = 361

SPECSpeed®2017_fp_peak = 367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-am
  d-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
L1 Stride Prefetcher set to Disabled
GMI Folding set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

running on localhost.localdomain Wed Jan 15 21:47:35 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 252 (252-32.el9_4)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
21:47:35 up 3 min, 0 users, load average: 0.08, 0.10, 0.05
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1545206
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 1545206
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.126/templogs/preenv.fpspeed.126.0.log --lognum 126.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
-----
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9475F 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9475F 48-Core Processor
BIOS Model name:       AMD EPYC 9475F 48-Core Processor
CPU family:            26
Model:                 2
Thread(s) per core:    2
Core(s) per socket:    48
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

Socket(s): 1
Stepping: 1
BogoMIPS: 7289.13
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfperf rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
cппc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pftthreshold avic v_vmsave_vmload vgif x2avic
v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca frsm
avx512_vp2intersect flush_llid debug_swap

Virtualization: AMD-V
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
always-on, RSB filling, PBRSE-eIBRS Not affected

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-95
node 0 size: 386340 MB
node 0 free: 384589 MB
node distances:
node 0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

0: 10

9. /proc/meminfo

MemTotal: 395612952 kB

10. who -r

run-level 3 Jan 15 21:44

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT	FILES
enabled	NetworkManager	NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs	
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex	
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot	

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=273c79f3-13a9-4ae6-9c36-e82799318ef8
ro
resume=UUID=19c8733f-555f-4142-8f61-7554d0dc64ae

15. cpupower frequency-info

analyzing CPU 73:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 21800MHz

16. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```

vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
system-release  Red Hat Enterprise Linux release 9.4 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   372G  105G  267G  29% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR635V3
Product Family: ThinkSystem
Serial:      1234567890

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

12x SK Hynix HMC888AHBRA290N 32 GB 2 rank 6400, configured at 6000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: KAE131I-5.30
BIOS Date: 12/17/2024
BIOS Revision: 5.30
Firmware Revision: 54.6

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 361

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2025
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -fltto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 361

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Date: Jan-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 361

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECSpeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

644.nab_s (continued):

```
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: basepeak = yes

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang
```

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

628.pop2_s (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635 V3
(3.65 GHz, AMD EPYC 9475F)

SPECspeed®2017_fp_base = 361

SPECspeed®2017_fp_peak = 367

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-15 08:47:35-0500.
Report generated on 2025-02-11 17:14:45 by CPU2017 PDF formatter v6716.
Originally published on 2025-02-11.