



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

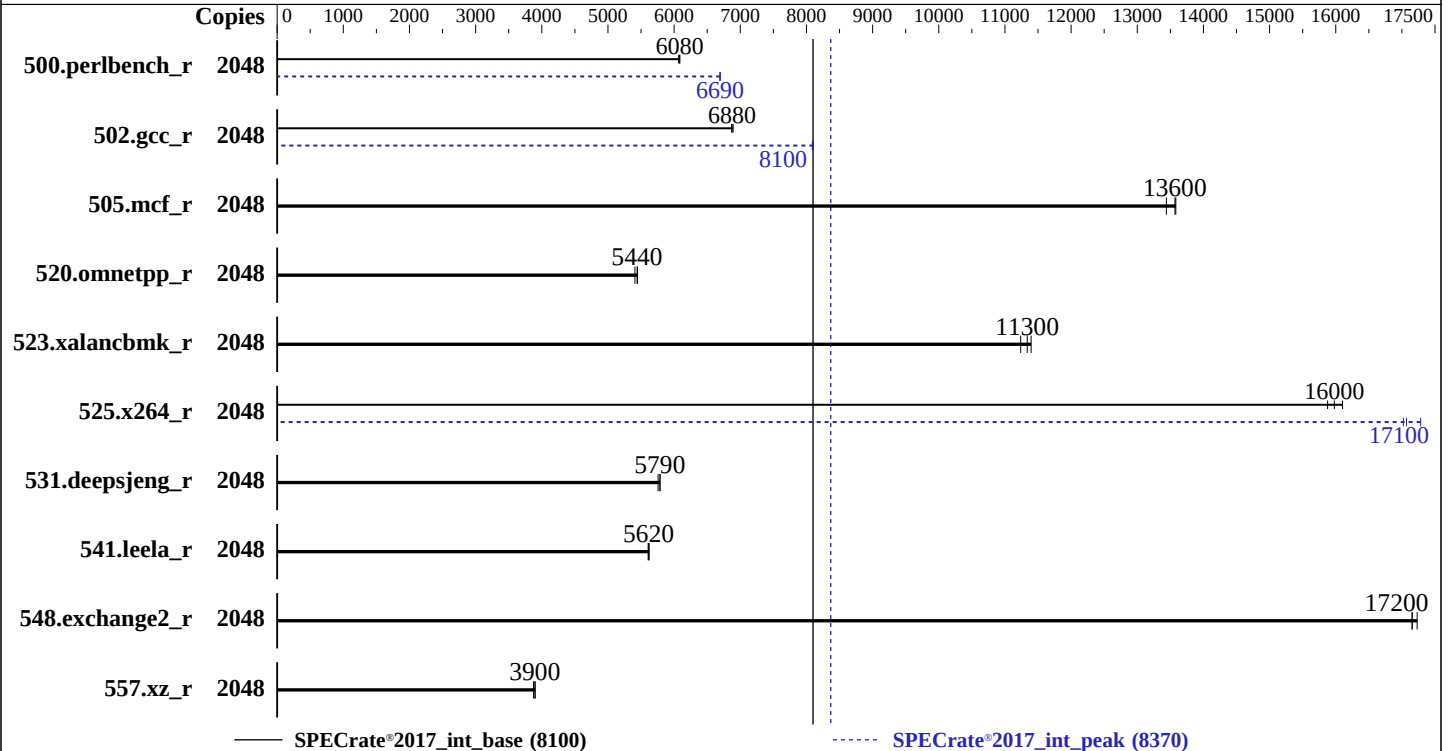

Hardware

CPU Name: Intel Xeon Platinum 8454H
Max MHz: 3400
Nominal: 2100
Enabled: 1024 cores, 32 chips, 2 threads/core
Orderable: 4, 8, 16, 32 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 82.5 MB I+D on chip per chip
Other: None
Memory: 32 TB (512 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
Storage: 1 x 6.4 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.23.38-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE Firmware Bundle Version 1.55.40 01/27/2025 released Jan-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	2048	536	6080	536	6080	537	6070	2048	487	6700	487	6690	487	6690
502.gcc_r	2048	422	6870	421	6890	422	6880	2048	359	8090	358	8100	358	8100
505.mcf_r	2048	244	13600	246	13400	244	13600	2048	244	13600	246	13400	244	13600
520.omnetpp_r	2048	494	5440	493	5450	497	5410	2048	494	5440	493	5450	497	5410
523.xalancbmk_r	2048	190	11400	191	11300	192	11200	2048	190	11400	191	11300	192	11200
525.x264_r	2048	223	16100	226	15900	224	16000	2048	207	17300	211	17000	210	17100
531.deepsjeng_r	2048	406	5790	408	5760	406	5790	2048	406	5790	408	5760	406	5790
541.leela_r	2048	603	5620	605	5610	604	5620	2048	603	5620	605	5610	604	5620
548.exchange2_r	2048	313	17200	313	17200	311	17200	2048	313	17200	313	17200	311	17200
557.xz_r	2048	568	3900	567	3900	571	3870	2048	568	3900	567	3900	571	3870

SPECrate®2017_int_base = **8100**

SPECrate®2017_int_peak = **8370**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to Custom
Energy/Performance Bias set to Maximum Performance
Energy Efficient Turbo set to Disabled
Advanced Memory Protection set to Advanced ECC Support
SR-I/OV set to Disabled
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on sph-275 Fri Feb 28 12:12:30 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
-
1. uname -a
Linux sph-275 6.4.0-150600.23.38-default #1 SMP PREEMPT_DYNAMIC Thu Feb 6 08:53:28 UTC 2025 (cb92f8c)
x86_64 x86_64 x86_64 GNU/Linux
 2. w

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

12:12:30 up 9 min, 1 user, load average: 2.32, 11.89, 9.31

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
test	ttyS0	-	12:10	2:04	0.11s	0.66s	login -- test
test	pts/0	-	12:10	6.00s	2.27s	0.05s	sudo su

3. Username

From environment variable \$USER: root
From the command 'logname': test

4. ulimit -a

core file size	(blocks, -c)	0
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	130060678
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	40000
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	130060678
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=43
login -- test
-bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=2048 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=1024 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=2048 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=1024 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.012/templots/preenv.intrate.012.0.log --lognum 012.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) Platinum 8454H
vendor_id	: GenuineIntel
cpu family	: 6
model	: 143
stepping	: 8
microcode	: 0x2b000620
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores	: 32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

```
siblings          : 64
32 physical ids (chips)
2048 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 4: core ids 0-31
physical id 5: core ids 0-31
physical id 6: core ids 0-31
physical id 7: core ids 0-31
physical id 8: core ids 0-31
physical id 9: core ids 0-31
physical id 10: core ids 0-31
physical id 11: core ids 0-31
physical id 12: core ids 0-31
physical id 13: core ids 0-31
physical id 14: core ids 0-31
physical id 15: core ids 0-31
physical id 16: core ids 0-31
physical id 17: core ids 0-31
physical id 18: core ids 0-31
physical id 19: core ids 0-31
physical id 20: core ids 0-31
physical id 21: core ids 0-31
physical id 22: core ids 0-31
physical id 23: core ids 0-31
physical id 24: core ids 0-31
physical id 25: core ids 0-31
physical id 26: core ids 0-31
physical id 27: core ids 0-31
physical id 28: core ids 0-31
physical id 29: core ids 0-31
physical id 30: core ids 0-31
physical id 31: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
physical id 4: apicids 512-575
physical id 5: apicids 640-703
physical id 6: apicids 768-831
physical id 7: apicids 896-959
physical id 8: apicids 1024-1087
physical id 9: apicids 1152-1215
physical id 10: apicids 1280-1343
physical id 11: apicids 1408-1471
physical id 12: apicids 1536-1599
physical id 13: apicids 1664-1727
physical id 14: apicids 1792-1855
physical id 15: apicids 1920-1983
physical id 16: apicids 2048-2111
physical id 17: apicids 2176-2239
physical id 18: apicids 2304-2367
physical id 19: apicids 2432-2495
physical id 20: apicids 2560-2623
physical id 21: apicids 2688-2751
physical id 22: apicids 2816-2879
physical id 23: apicids 2944-3007
physical id 24: apicids 3072-3135
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

physical id 25: apicids 3200-3263
physical id 26: apicids 3328-3391
physical id 27: apicids 3456-3519
physical id 28: apicids 3584-3647
physical id 29: apicids 3712-3775
physical id 30: apicids 3840-3903
physical id 31: apicids 3968-4031

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      2048
On-line CPU(s) list:        0-2047
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Platinum 8454H
CPU family:                   6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         32
Socket(s):                   32
Stepping:                    8
CPU(s) scaling MHz:         24%
CPU max MHz:                 3400.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4200.03
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
                             xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
                             ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                             rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                             tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                             avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                             sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                             cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                             user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                             hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                             avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                             avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                             movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                             ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                             arch_capabilities
L1d cache:                   48 MiB (1024 instances)
L1i cache:                   32 MiB (1024 instances)
L2 cache:                    2 GiB (1024 instances)
L3 cache:                    2.6 GiB (32 instances)
NUMA node(s):                32
NUMA node0 CPU(s):           0-31,1024-1055
NUMA node1 CPU(s):           32-63,1056-1087
NUMA node2 CPU(s):           64-95,1088-1119
NUMA node3 CPU(s):           96-127,1120-1151
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

```
NUMA node4 CPU(s):      128-159,1152-1183
NUMA node5 CPU(s):      160-191,1184-1215
NUMA node6 CPU(s):      192-223,1216-1247
NUMA node7 CPU(s):      224-255,1248-1279
NUMA node8 CPU(s):      256-287,1280-1311
NUMA node9 CPU(s):      288-319,1312-1343
NUMA node10 CPU(s):     320-351,1344-1375
NUMA node11 CPU(s):     352-383,1376-1407
NUMA node12 CPU(s):     384-415,1408-1439
NUMA node13 CPU(s):     416-447,1440-1471
NUMA node14 CPU(s):     448-479,1472-1503
NUMA node15 CPU(s):     480-511,1504-1535
NUMA node16 CPU(s):     512-543,1536-1567
NUMA node17 CPU(s):     544-575,1568-1599
NUMA node18 CPU(s):     576-607,1600-1631
NUMA node19 CPU(s):     608-639,1632-1663
NUMA node20 CPU(s):     640-671,1664-1695
NUMA node21 CPU(s):     672-703,1696-1727
NUMA node22 CPU(s):     704-735,1728-1759
NUMA node23 CPU(s):     736-767,1760-1791
NUMA node24 CPU(s):     768-799,1792-1823
NUMA node25 CPU(s):     800-831,1824-1855
NUMA node26 CPU(s):     832-863,1856-1887
NUMA node27 CPU(s):     864-895,1888-1919
NUMA node28 CPU(s):     896-927,1920-1951
NUMA node29 CPU(s):     928-959,1952-1983
NUMA node30 CPU(s):     960-991,1984-2015
NUMA node31 CPU(s):     992-1023,2016-2047
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                      PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected
```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	48M	12	Data	1	64	1	64
L1i	32K	32M	8	Instruction	1	64	1	64
L2	2M	2G	16	Unified	2	2048	1	64
L3	82.5M	2.6G	15	Unified	3	90112	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```
available: 32 nodes (0-31)
node 0 cpus: 0-31,1024-1055
node 0 size: 1015095 MB
node 0 free: 1013261 MB
node 1 cpus: 32-63,1056-1087
node 1 size: 1016234 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

node 1 free: 1015519 MB
node 2 cpus: 64-95,1088-1119
node 2 size: 1016234 MB
node 2 free: 1015124 MB
node 3 cpus: 96-127,1120-1151
node 3 size: 1016234 MB
node 3 free: 1015176 MB
node 4 cpus: 128-159,1152-1183
node 4 size: 1016234 MB
node 4 free: 1015868 MB
node 5 cpus: 160-191,1184-1215
node 5 size: 1016234 MB
node 5 free: 1015872 MB
node 6 cpus: 192-223,1216-1247
node 6 size: 1016234 MB
node 6 free: 1015564 MB
node 7 cpus: 224-255,1248-1279
node 7 size: 1016234 MB
node 7 free: 1015562 MB
node 8 cpus: 256-287,1280-1311
node 8 size: 1016234 MB
node 8 free: 1015808 MB
node 9 cpus: 288-319,1312-1343
node 9 size: 1016234 MB
node 9 free: 1015889 MB
node 10 cpus: 320-351,1344-1375
node 10 size: 1016234 MB
node 10 free: 1015568 MB
node 11 cpus: 352-383,1376-1407
node 11 size: 1016234 MB
node 11 free: 1015581 MB
node 12 cpus: 384-415,1408-1439
node 12 size: 1016234 MB
node 12 free: 1015799 MB
node 13 cpus: 416-447,1440-1471
node 13 size: 1016196 MB
node 13 free: 1015678 MB
node 14 cpus: 448-479,1472-1503
node 14 size: 1016234 MB
node 14 free: 1015525 MB
node 15 cpus: 480-511,1504-1535
node 15 size: 1016234 MB
node 15 free: 1015485 MB
node 16 cpus: 512-543,1536-1567
node 16 size: 1016234 MB
node 16 free: 1015902 MB
node 17 cpus: 544-575,1568-1599
node 17 size: 1016234 MB
node 17 free: 1015928 MB
node 18 cpus: 576-607,1600-1631
node 18 size: 1016234 MB
node 18 free: 1015621 MB
node 19 cpus: 608-639,1632-1663
node 19 size: 1016234 MB
node 19 free: 1015615 MB
node 20 cpus: 640-671,1664-1695
node 20 size: 1016234 MB
node 20 free: 1015427 MB
node 21 cpus: 672-703,1696-1727
node 21 size: 1016234 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

node 21 free: 1015502 MB
node 22 cpus: 704-735,1728-1759
node 22 size: 1016234 MB
node 22 free: 1015194 MB
node 23 cpus: 736-767,1760-1791
node 23 size: 1016234 MB
node 23 free: 1014723 MB
node 24 cpus: 768-799,1792-1823
node 24 size: 1016234 MB
node 24 free: 1015857 MB
node 25 cpus: 800-831,1824-1855
node 25 size: 1016234 MB
node 25 free: 1015908 MB
node 26 cpus: 832-863,1856-1887
node 26 size: 1016234 MB
node 26 free: 1015611 MB
node 27 cpus: 864-895,1888-1919
node 27 size: 1016234 MB
node 27 free: 1015604 MB
node 28 cpus: 896-927,1920-1951
node 28 size: 1016234 MB
node 28 free: 1013593 MB
node 29 cpus: 928-959,1952-1983
node 29 size: 1016234 MB
node 29 free: 1014850 MB
node 30 cpus: 960-991,1984-2015
node 30 size: 1016234 MB
node 30 free: 1014447 MB
node 31 cpus: 992-1023,2016-2047
node 31 size: 1013107 MB
node 31 free: 1011028 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
25	0:	10	16	16	18	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
26	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
27	1:	16	10	18	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
28	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
29	2:	16	18	10	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
30	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
31	3:	18	16	16	10	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	4:	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	5:	40	40	40	40	16	10	18	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	6:	40	40	40	40	16	18	10	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	7:	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
	8:	40	40	40	40	40	40	40	40	10	16	16	18	40	40	40	40	40	40	40	40	40	40	40	40
	9:	40	40	40	40	40	40	40	40	16	10	18	16	40	40	40	40	40	40	40	40	40	40	40	40
	10:	40	40	40	40	40	40	40	40	16	18	10	16	40	40	40	40	40	40	40	40	40	40	40	40
	11:	40	40	40	40	40	40	40	40	18	16	16	10	40	40	40	40	40	40	40	40	40	40	40	40
	12:	40	40	40	40	40	40	40	40	40	40	10	16	16	18	40	40	40	40	40	40	40	40	40	40
	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

```
13: 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
14: 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
15: 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
16: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18 40 40 40 40
40 40 40 40 40 40 40
17: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40 40
40 40 40 40 40 40 40
18: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40 40
40 40 40 40 40 40 40
19: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40 40
40 40 40 40 40 40 40
20: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18 40
40 40 40 40 40 40 40
21: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40
40 40 40 40 40 40 40
22: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40
40 40 40 40 40 40 40
23: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40
40 40 40 40 40 40 40
24: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10
16 16 18 40 40 40 40
25: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16
10 18 16 40 40 40 40
26: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16
18 10 16 40 40 40 40
27: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18
16 16 10 40 40 40 40
28: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 10 16 16 18
29: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 16 10 18 16
30: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 16 18 10 16
31: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 18 16 16 10
```

9. /proc/meminfo

MemTotal: 33295566648 kB

10. who -r

run-level 3 Feb 28 12:08

11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dcdchkgracefulshutdown.service	loaded	failed	failed	Check if previous system shutdown was graceful
* postfix.service	loaded	failed	failed	Postfix Mail Transport Agent

13. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-fsck-root systemd-remount-fs
disabled	accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd clamonnacc console-getty cups cups-browsed cxi-monitor debug-shell ebtables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmiev d irqbalance issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spamd speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ winbind ypbind
indirect	serial-getty@ systemd-userdbd tftpd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.38-default  
root=UUID=3f2deed0-2789-4a6c-ba7e-4dc1feba6765  
rd.auto=1  
console=ttyS0,115200n8  
selinux=0  
security=  
splash=silent  
mitigations=auto  
console=ttyS0,115200  
udev.children-max=512  
nmi_watchdog=0  
uv_nmi.action=kdump  
add_efi_memmap  
tsc=nowatchdog  
earlyprintk=ttyS0,115200  
log_buf_len=8M  
numa_balancing=disable  
pci=norom  
crashkernel=3G,high  
watchdog_thresh=60  
workqueue.watchdog_thresh=120
```

15. cpupower frequency-info

```
analyzing CPU 990:  
  current policy: frequency should be within 800 MHz and 3.40 GHz.  
                  The governor "performance" may decide which speed to use  
                  within this range.  
  
  boost state support:  
    Supported: yes  
    Active: yes
```

16. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

17. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

18. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

From /etc/*-release /etc/*-version	
os-release	SUSE Linux Enterprise Server 15 SP6
hpe-foundation-release	HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	xfs	5.9T	31G	5.8T	1%	/

22. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	Compute Scale-up Server 3200
Product Family:	1590PID03030201
Serial:	5UF424K4VF-000

23. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

344x Hynix HMC94AEBRA123N 64 GB 2 rank 4800, configured at 4400

100x Micron MTC40F2046S1RC48BA1 MHCC 64 GB 2 rank 4800, configured at 4400

68x Micron MTC40F2046S1RC48BA1 MHFF 64 GB 2 rank 4800, configured at 4400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE

BIOS Version: Bundle:1.55.40-20250129_060251 SFW:009.036.009.000.2501270505

BIOS Date: 01/27/2025

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_int_base = 8100

SPECrate®2017_int_peak = 8370

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-28 13:12:29-0500.

Report generated on 2025-03-26 10:33:33 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.