



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221


Test Date: Mar-2025

Test Sponsor: Meganet

Hardware Availability: Dec-2022

Tested by: FusionStor

Software Availability: Jan-2025

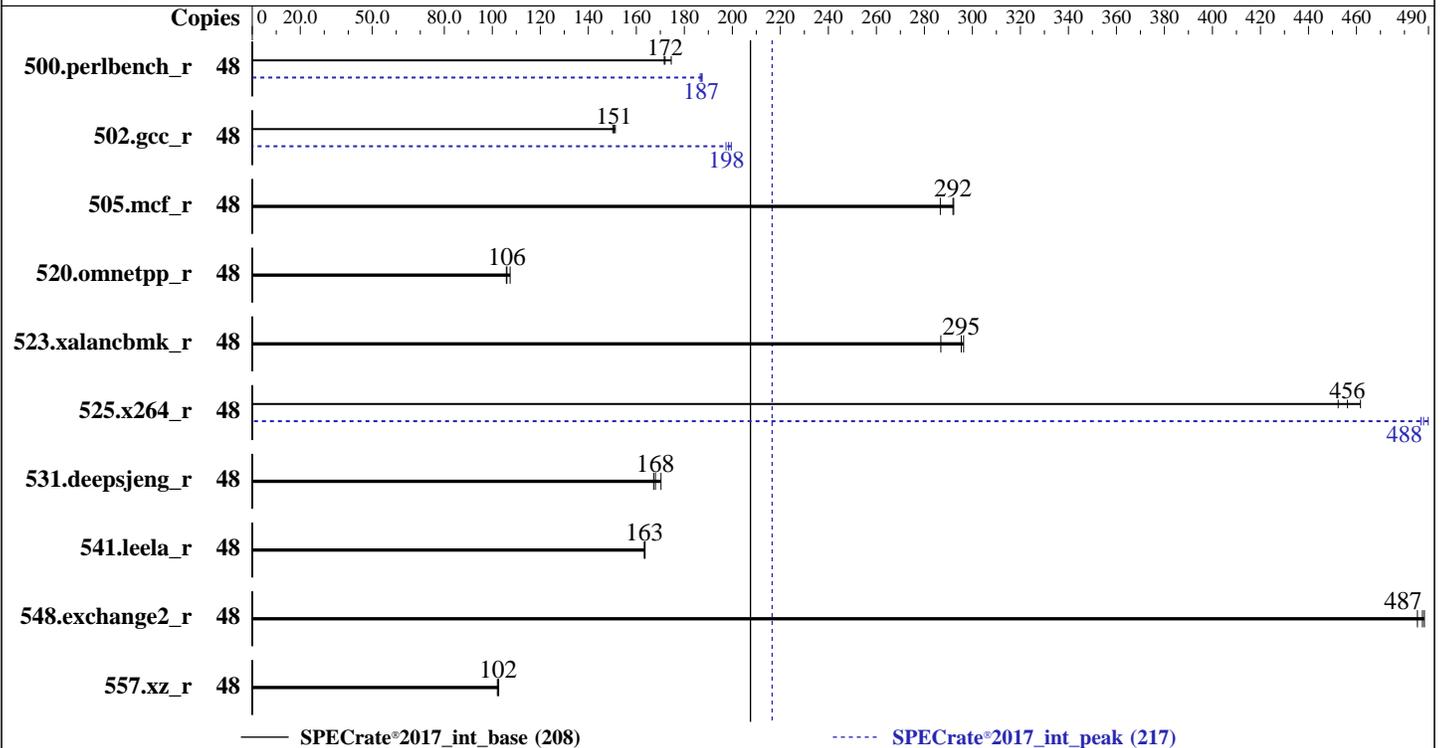

Hardware

CPU Name: Intel Xeon Silver 4510
 Max MHz: 4100
 Nominal: 2400
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (6 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
 6.8.0-52-generic
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version EG0.10.01 released Mar-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the expense of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	438	175	444	172	445	172	48	408	187	408	187	409	187
502.gcc_r	48	451	151	453	150	449	151	48	344	197	341	200	342	198
505.mcf_r	48	266	292	265	292	271	287	48	266	292	265	292	271	287
520.omnetpp_r	48	586	107	595	106	594	106	48	586	107	595	106	594	106
523.xalancbmk_r	48	172	295	171	296	177	287	48	172	295	171	296	177	287
525.x264_r	48	182	462	184	456	186	452	48	172	488	173	487	172	490
531.deepsjeng_r	48	323	170	329	167	328	168	48	323	170	329	167	328	168
541.leela_r	48	486	163	487	163	486	164	48	486	163	487	163	486	164
548.exchange2_r	48	259	485	258	487	258	488	48	259	485	258	487	258	488
557.xz_r	48	506	102	505	103	508	102	48	506	102	505	103	508	102

SPECrate®2017_int_base = **208**

SPECrate®2017_int_peak = **217**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/lib/ia32:/home/speccpu/cpu2017/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Platform Notes

BIOS settings
Enable SNC2 (2-Clusters)

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on intel Tue Mar 11 12:07:21 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```

1. uname -a
Linux intel 6.8.0-52-generic #53~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Jan 15 19:18:46 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

```

```

2. w
12:07:21 up 28 min, 2 users, load average: 0.32, 0.30, 0.25
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
intel    :1        :1            11:57      ?xdm?      4:56      0.00s    /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel    pts/1    -             12:07      3.00s      1.53s     0.00s    sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

```

```

3. Username
From environment variable $USER:  root
From the command 'logname':      intel

```

```

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Platform Notes (Continued)

data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	49486612
process	1546146
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

```

5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.043/templogs/preenv.intrate.043.0.log --lognum 043.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

```

```

6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) SILVER 4510
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b000620
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 12
siblings       : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 64-87
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Platform Notes (Continued)

```

On-line CPU(s) list:          0-47
Vendor ID:                   GenuineIntel
Model name:                   INTEL(R) XEON(R) SILVER 4510
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          12
Socket(s):                    2
Stepping:                     8
CPU max MHz:                  4100.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4800.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                             pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                             xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                             tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                             avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                             sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                             cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                             user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnm
                             avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                             avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   1.1 MiB (24 instances)
L1i cache:                   768 KiB (24 instances)
L2 cache:                    48 MiB (24 instances)
L3 cache:                    60 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-5,24-29
NUMA node1 CPU(s):          6-11,30-35
NUMA node2 CPU(s):          12-17,36-41
NUMA node3 CPU(s):          18-23,42-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d      48K      1.1M    12 Data      1     64      1              64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Platform Notes (Continued)

L1i	32K	768K	8 Instruction	1	64	1	64
L2	2M	48M	16 Unified	2	2048	1	64
L3	30M	60M	15 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 128626 MB
node 0 free: 127220 MB
node 1 cpus: 6-11,30-35
node 1 size: 129019 MB
node 1 free: 128427 MB
node 2 cpus: 12-17,36-41
node 2 size: 64507 MB
node 2 free: 63869 MB
node 3 cpus: 18-23,42-47
node 3 size: 64460 MB
node 3 free: 63656 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 395892916 kB

10. who -r

run-level 5 Mar 11 11:40

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```

Default Target Status
graphical      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

13. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage
udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled   acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@
rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Dec-2022

Software Availability: Jan-2025

Platform Notes (Continued)

```

wpa_supplicant@
generated      apport cpufrequtils loadcpufreq speech-dispatcher
indirect       saned@ spice-vdagentd uidd
masked         alsactl cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
               screen-cleanup sudo systemd-rfkill x11-common

```

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-52-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7

```

15. cpupower frequency-info

```

analyzing CPU 10:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

17. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer+madvise [madvise] never
enabled     always [madvise] never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

20. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 879G 687G 148G 83% /

21. /sys/devices/virtual/dmi/id
Vendor: Fusionstor
Product: Invento_i6000
Product Family: SG_Intel_EagleStream
Serial: HQ3110001BDA03CD0002

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x NO DIMM NO DIMM
1x Samsung M321R8GA0BB0-CQKZJ 2 rank 4800, configured at 4000
7x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: EG0.10.01
BIOS Date: 03/22/2024
BIOS Revision: 5.32
The dmidecode utility was not reporting the memory configuration correctly for this system.
The installed memory configuration was: 384 GB (6 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Dec-2022

Software Availability: Jan-2025

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Dec-2022
Software Availability: Jan-2025

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 208

Invento i6000 (Intel Xeon Silver 4510)

SPECrate®2017_int_peak = 217

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Dec-2022

Software Availability: Jan-2025

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-11 02:37:20-0400.

Report generated on 2025-04-22 12:00:02 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.