SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)
AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

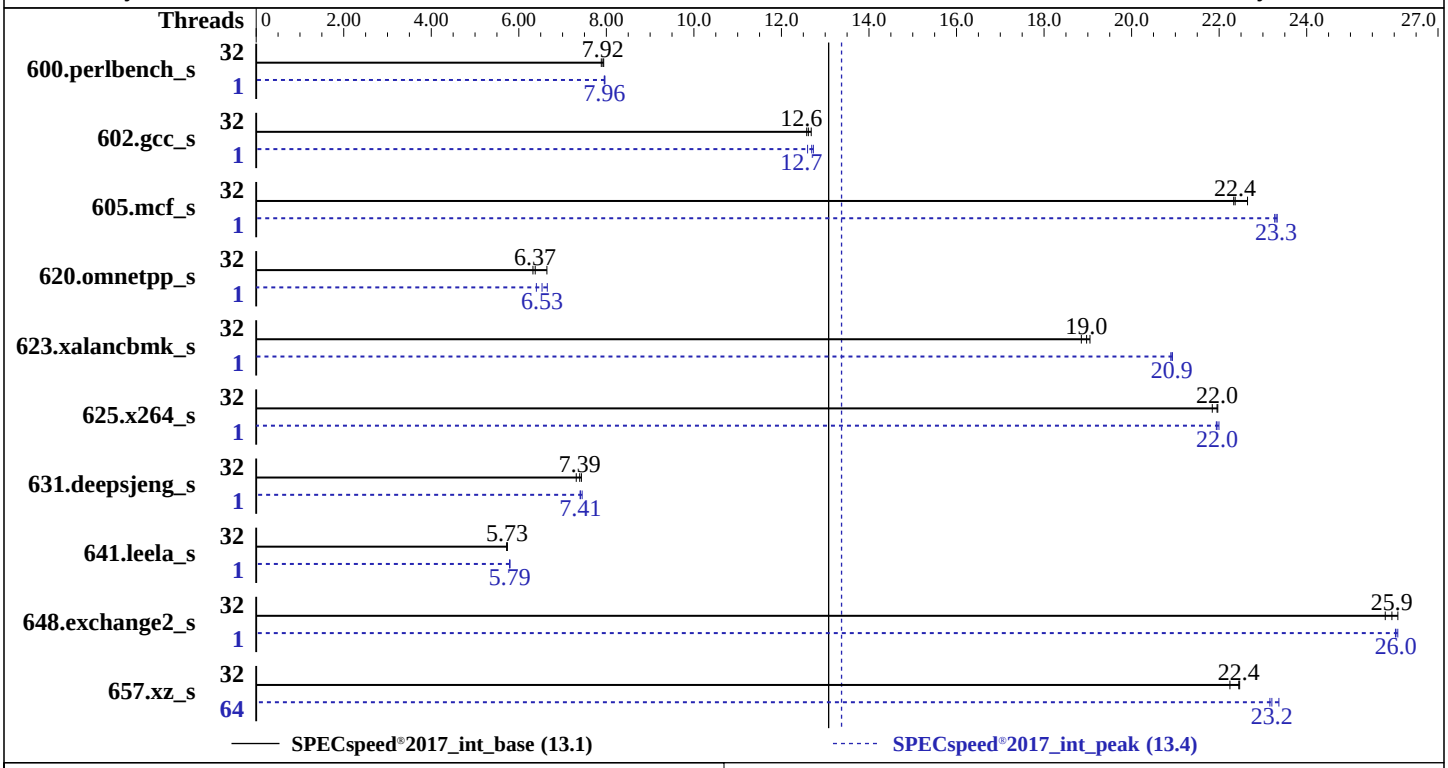

Hardware

CPU Name:	AMD EPYC 9124
Max MHz:	3700
Nominal:	3000
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	960 GB (15 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 22.04.5 LTS kernel version 6.8.0-52-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 5.27 released Nov-2024
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	OS set to prefer performance at the expense of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)
Invento i6000 EPYC (AMD EPYC 9124)
AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	224	7.94	**224**	**7.92**	225	7.88	1	223	7.95	**223**	**7.96**	223	7.97
602.gcc_s	32	**316**	**12.6**	317	12.6	314	12.7	1	**314**	**12.7**	316	12.6	313	12.7
605.mcf_s	32	**211**	**22.4**	211	22.3	208	22.6	1	203	23.3	**203**	**23.3**	202	23.3
620.omnetpp_s	32	246	6.64	258	6.32	**256**	**6.37**	1	245	6.65	255	6.40	**250**	**6.53**
623.xalancbmk_s	32	75.2	18.9	**74.7**	**19.0**	74.4	19.0	1	67.7	20.9	67.8	20.9	**67.7**	**20.9**
625.x264_s	32	**80.4**	**22.0**	80.3	22.0	80.8	21.8	1	**80.4**	**22.0**	80.2	22.0	80.4	21.9
631.deepsjeng_s	32	**194**	**7.39**	193	7.43	196	7.31	1	194	7.40	192	7.45	**193**	**7.41**
641.leela_s	32	**298**	**5.73**	298	5.72	297	5.74	1	294	5.80	295	5.79	**294**	**5.79**
648.exchange2_s	32	**113**	**25.9**	113	26.1	114	25.8	1	**113**	**26.0**	113	26.0	113	26.1
657.xz_s	32	278	22.2	**275**	**22.4**	275	22.5	64	267	23.2	**266**	**23.2**	265	23.4

SPECspeed®2017_int_base = **13.1**

SPECspeed®2017_int_peak = **13.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znve
     r5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04
```

Platform Notes

```
 Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on AMD Wed Mar 19 10:20:44 2025

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux AMD 6.8.0-52-generic #53~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Jan 15 19:18:46 UTC 2 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   10:20:44 up 16:15,  3 users,  load average: 0.44, 0.37, 7.36
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  test     :1       :1               Tue17   ?xdm?   4:27m  0.00s /usr/libexec/gdm-x-session --run-script env
  GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
  test     pts/1    -                Tue18   11.00s  1.93s  0.27s sudo -s
  test     pts/3    -                Tue19   15:04m  0.01s  0.07s sudo -s

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3868763
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 5. sysinfo process ancestry
  /sbin/init splash
  /lib/systemd/systemd --user
  /usr/libexec/gnome-terminal-server
  bash
  sudo -s
  sudo -s
  /bin/bash
  python3 ./run_amd_speed_aocc500_znver5_A1.py
  /bin/bash ./amd_speed_aocc500_znver5_A1.sh
  runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
  runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
    --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/speccpu/cpu2017

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : AMD EPYC 9124 16-Core Processor
     vendor_id       : AuthenticAMD
     cpu family      : 25
     model           : 17
     stepping        : 1
     microcode       : 0xa101148
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
     TLB size        : 3584 4K pages
     cpu cores       : 16
     siblings        : 32
     2 physical ids (chips)
     64 processors (hardware threads)
     physical id 0: core ids 0-3,8-11,16-19,24-27
     physical id 1: core ids 0-3,8-11,16-19,24-27
     physical id 0: apicids 0-7,16-23,32-39,48-55
     physical id 1: apicids 64-71,80-87,96-103,112-119
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               64
   On-line CPU(s) list:                  0-63
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9124 16-Core Processor
   CPU family:                           25
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   16
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU max MHz:                          3711.9141
   CPU min MHz:                          1500.0000
   BogoMIPS:                             6000.29
```

(Continued on next page)

Platform Notes (Continued)

```
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                   pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                   rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                   extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                   cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                   osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                   ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                   erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                   clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                   xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                   user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                   amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                                   flushbyasid decodeassists pausefilter pfthreshold avic
                                   v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                   ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                   debug_swap
  Virtualization:                  AMD-V
  L1d cache:                       1 MiB (32 instances)
  L1i cache:                       1 MiB (32 instances)
  L2 cache:                        32 MiB (32 instances)
  L3 cache:                        128 MiB (8 instances)
  NUMA node(s):                    2
  NUMA node0 CPU(s):               0-15,32-47
  NUMA node1 CPU(s):               16-31,48-63
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Mitigation; Safe RET
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                   always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       1M    8 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         1M      32M    8 Unified         2  2048        1             64
     L3        16M     128M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-15,32-47
  node 0 size: 515739 MB
  node 0 free: 513768 MB
  node 1 cpus: 16-31,48-63
  node 1 size: 451529 MB
  node 1 free: 449858 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       990482888 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 18 17:22

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
                   cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                   irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
                   rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
                   systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                   unattended-upgrades wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@
                   openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
                   systemd-boot-check-no-failures systemd-network-generator systemd-networkd
                   systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower
                   wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
  generated        apport openipmi speech-dispatcher
  indirect         saned@ spice-vdagentd uuidd
  masked           alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                   screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-52-generic
  root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
  ro
  quiet
  splash
  vt.handoff=7

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 24:
    current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3000MHz
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.5 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/speccpu/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  879G   37G  798G   5% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FusionStor
    Product:        Fusionstor_Invento_i6000_EPYC_Series
    Product Family: Server
    Serial:         GNG6PB312A0006

------------------------------------------------------------
21. dmidecode
```

(Continued on next page)

Platform Notes (Continued)

```
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     15x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
     9x Unknown Unknown


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUSIONSTOR
    BIOS Version:      F18
    BIOS Date:         10/11/2024
    BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

602.gcc_s: `Same as 600.perlbench_s`

605.mcf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

625.x264_s: `Same as 600.perlbench_s`

657.xz_s: `Same as 600.perlbench_s`

C++ benchmarks:

620.omnetpp_s: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt -fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

623.xalancbmk_s: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt -fvirtual-function-elimination -fvisibility=hidden`

(Continued on next page)

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-19 00:50:44-0400.
Report generated on 2025-04-22 12:00:02 by CPU2017 PS formatter v6716.
Originally published on 2025-04-22.