



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 233

PowerEdge XR8610t (Intel Xeon Gold 6438N)

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

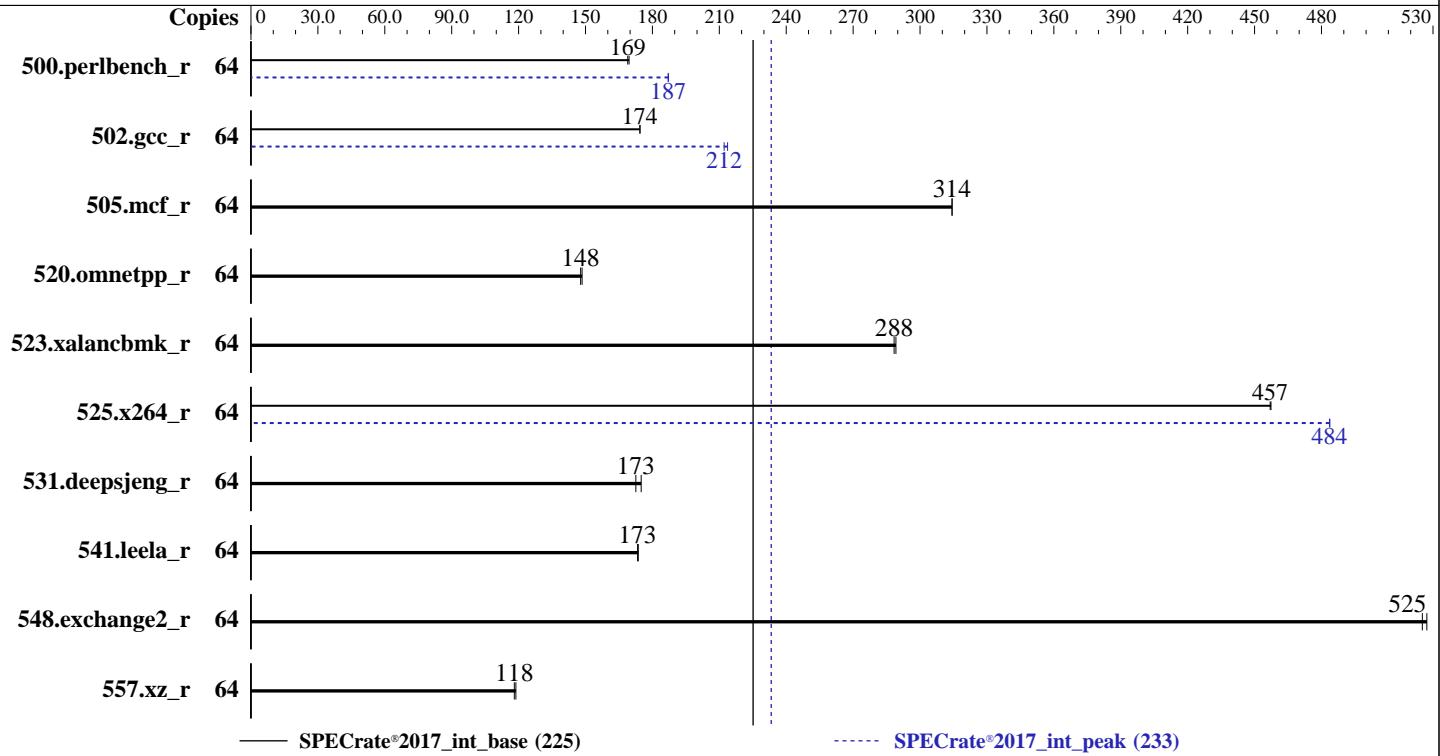

Hardware

CPU Name: Intel Xeon Gold 6438N
 Max MHz: 3600
 Nominal: 2000
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 60 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2.5.4 released Jan-2025
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XR8610t (Intel Xeon Gold 6438N)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 233

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	601	170	603	169			64	544	187	545	187				
502.gcc_r	64	520	174	520	174			64	427	212	424	214				
505.mcf_r	64	329	314	329	314			64	329	314	329	314				
520.omnetpp_r	64	566	148	568	148			64	566	148	568	148				
523.xalancbmk_r	64	234	288	234	289			64	234	288	234	289				
525.x264_r	64	245	457	245	457			64	232	484	232	484				
531.deepsjeng_r	64	419	175	425	173			64	419	175	425	173				
541.leela_r	64	610	174	611	173			64	610	174	611	173				
548.exchange2_r	64	318	527	319	525			64	318	527	319	525				
557.xz_r	64	585	118	582	119			64	585	118	582	119				

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ram
  disk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

```
Virtualization Technology : Disabled
    Sub NUMA Cluster : 2-Way Clustering
UMA Based Clustering Status : Disable
    LLC Prefetch : Enabled
    x2APIC Mode : Disabled
```

```
System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
    C1E : Disabled
    C-States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficient Policy : Performance
    ADDDC Setting : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLX8620-XR8610t Mon Mar 31 19:02:36 2025
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECCrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

21. BIOS

```
1. uname -a
Linux SLX8620-XR8610t 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
19:02:36 up 1 min, 1 user, load average: 0.38, 0.19, 0.07
USER      TTY      FROM             LOGIN@     IDLE    JCPU   PCPU WHAT
root      tty1          -           19:01   36.00s  0.90s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 2060014
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 2060014
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
  html,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
  html,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
  DL-VERS=6.1a --output_format html,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --define DL-VERS=6.1a --output_format html,txt --nopower --runmode rate --tune base:peak --size
  refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
  --lognum 001.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```
-----  
6. /proc/cpuinfo  
    model name      : Intel(R) Xeon(R) Gold 6438N  
    vendor_id       : GenuineIntel  
    cpu family     : 6  
    model          : 143  
    stepping       : 8  
    microcode      : 0x2b000622  
    bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss bhi  
    cpu cores      : 32  
    siblings       : 64  
    1 physical ids (chips)  
    64 processors (hardware threads)  
    physical id 0: core ids 0-31  
    physical id 0: apicids 0-63
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
Architecture:                      x86_64  
CPU op-mode(s):                   32-bit, 64-bit  
Address sizes:                    46 bits physical, 57 bits virtual  
Byte Order:                       Little Endian  
CPU(s):                           64  
On-line CPU(s) list:              0-63  
Vendor ID:                        GenuineIntel  
BIOS Vendor ID:                  Intel  
Model name:                       Intel(R) Xeon(R) Gold 6438N  
BIOS Model name:                 Intel(R) Xeon(R) Gold 6438N CPU @ 2.0GHz  
BIOS CPU family:                 179  
CPU family:                       6  
Model:                            143  
Thread(s) per core:               2  
Core(s) per socket:               32  
Socket(s):                        1  
Stepping:                          8  
CPU(s) scaling MHz:              32%  
CPU max MHz:                     3600.0000  
CPU min MHz:                     800.0000  
BogoMIPS:                         4000.00  
Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mttr pg e mca cmov pat  
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx  
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good  
nopl xtTopology nonstop_tsc cpuid aperfmpf tsc_known_freq pnpi  
pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr  
pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer  
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb  
cat_13 cat_12 cdp_13 cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced  
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm  
rdt_a avx512f avx512dq rdseed adx smap avx512fma clflushopt clwb  
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavenc xgetbv1  
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local  
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida  
arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

	vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
	rddpid bus_lock_detect cldemote movmdir movdir64b enqcmand fsrm md_clear
	serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
	amx_int8 flush_lld arch_capabilities
L1d cache:	1.5 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	64 MiB (32 instances)
L3 cache:	60 MiB (1 instance)
NUMA node(s):	2
NUMA node0 CPU(s):	0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48 ,50,52,54,56,58,60,62
NUMA node1 CPU(s):	1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49 ,51,53,55,57,59,61,63
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	60M	60M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62

node 0 size: 257381 MB

node 0 free: 246430 MB

node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63

node 1 size: 257648 MB

node 1 free: 256516 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 527390628 kB

10. who -r

run-level 3 Mar 31 19:01

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target Status
    multi-user      running

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
                  kdump-early kdump-notify lvm2-monitor nvmefc-boot-connections nvmf-autoconnect postfix
                  purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
    enabled-runtime   systemd-remount-fs
    disabled       blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                  ebttables fsidd grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap
                  rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
    indirect       systemd-userdbd wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=1420f0de-cf2a-452f-9c6a-d3257d093ae8
    splash=silent
    resume=/dev/disk/by-uuid/322e7a60-cd58-41d2-8e97-7a815c571f90
    mitigations=auto
    quiet
    security=apparmor
    crashkernel=370M,high
    crashkernel=72M,low

-----
14. sysctl
    kernel.numa_balancing      1
    kernel.randomize_va_space  2
    vm.compaction_proactiveness 20
    vm.dirty_background_bytes  0
    vm.dirty_background_ratio  10
    vm.dirty_bytes              0
    vm.dirty_expire_centisecs 3000
    vm.dirty_ratio              20
    vm.dirty_writeback_centisecs 500
    vm.dirtytime_expire_seconds 43200
    vm.extfrag_threshold       500
    vm.min_unmapped_ratio     1
    vm.nr_hugepages            0
    vm.nr_hugepages_mempolicy  0
    vm.nr_overcommit_hugepages 0
    vm.swappiness               60
    vm.watermark_boost_factor 15000
    vm.watermark_scale_factor  10
    vm.zone_reclaim_mode       0

-----
15. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECCrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 5.0G 56G 9% /mnt/ramdisk

19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge XR8610t
Product Family: PowerEdge
Serial: SLX8620

20. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
7x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 2.5.4
BIOS Date: 01/16/2025
BIOS Revision: 2.5

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Base Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 225

PowerEdge XR8610t (Intel Xeon Gold 6438N)

SPECCrate®2017_int_peak = 233

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-31 19:02:36-0400.

Report generated on 2025-04-22 18:11:24 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.