SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

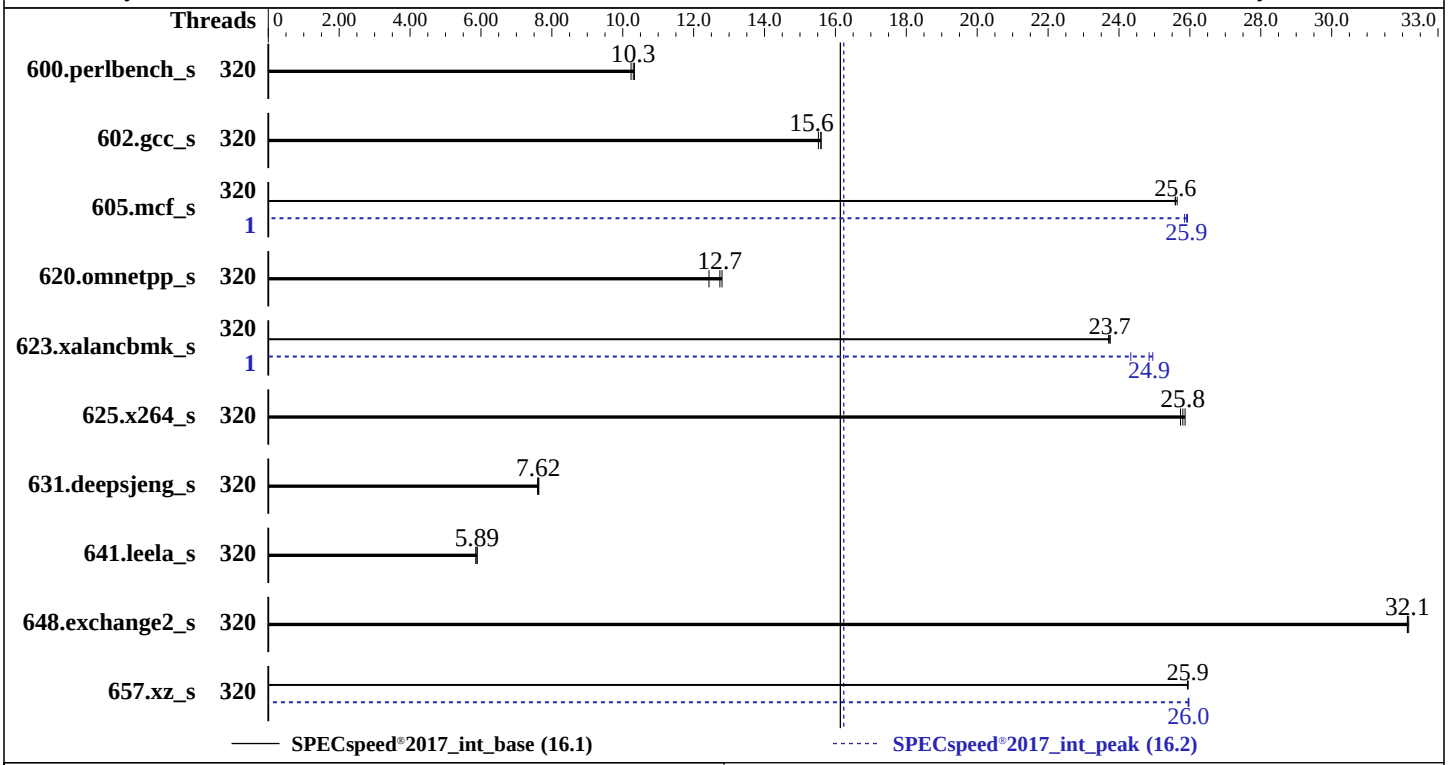

Hardware

CPU Name:	AMD EPYC 9845
Max MHz:	3700
Nominal:	2100
Enabled:	320 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	320 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 480 GB SATA SSD
Other:	CPU Cooling: DLC

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version v2.30 01/17/2025 released Jan-2025
File System:	btrfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen11
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	320	172	10.3	**172**	**10.3**	173	10.2	320	172	10.3	**172**	**10.3**	173	10.2
602.gcc_s	320	**255**	**15.6**	255	15.6	257	15.5	320	**255**	**15.6**	255	15.6	257	15.5
605.mcf_s	320	185	25.6	**184**	**25.6**	184	25.6	1	**182**	**25.9**	183	25.8	182	25.9
620.omnetpp_s	320	131	12.4	**128**	**12.7**	127	12.8	320	131	12.4	**128**	**12.7**	127	12.8
623.xalancbmk_s	320	**59.7**	**23.7**	59.7	23.8	59.8	23.7	1	56.8	25.0	58.2	24.3	**57.0**	**24.9**
625.x264_s	320	**68.4**	**25.8**	68.2	25.9	68.5	25.7	320	**68.4**	**25.8**	68.2	25.9	68.5	25.7
631.deepsjeng_s	320	189	7.60	**188**	**7.62**	188	7.63	320	189	7.60	**188**	**7.62**	188	7.63
641.leela_s	320	**290**	**5.89**	291	5.85	290	5.89	320	**290**	**5.89**	291	5.85	290	5.89
648.exchange2_s	320	91.5	32.1	**91.5**	**32.1**	91.4	32.2	320	91.5	32.1	**91.5**	**32.1**	91.4	32.2
657.xz_s	320	238	25.9	**238**	**25.9**	238	26.0	320	238	26.0	238	26.0	**238**	**26.0**

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
tuned service was stopped using "systemctl stop tuned"

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-319"
LD_LIBRARY_PATH =
     "/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib
     /lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "320"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-319"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS Configuration
 Workload Profile set to General Peak Frequency Compute
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 AMD SMT Option set to Disabled
 NUMA memory domains per socket set to Two memory domains per socket
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode
 The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.3

 Sysinfo program /home/cpu2017_new/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Wed Jan 22 14:30:01 2025

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   14:30:01 up  3:27,  2 users,  load average: 0.07, 0.06, 0.76
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    10.30.195.96     11:03   17.00s  1.24s  0.40s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190359
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190359
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.004/templogs/preenv.intspeed.004.0.log --lognum 004.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9845 160-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101028
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 160
    siblings        : 160
    2 physical ids (chips)
    320 processors (hardware threads)
    physical id 0: core ids 0-159
    physical id 1: core ids 0-159
    physical id 0: apicids 0-159
    physical id 1: apicids 256-415
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               320
  On-line CPU(s) list:                  0-319
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9845 160-Core Processor
  BIOS Model name:                      AMD EPYC 9845 160-Core Processor                CPU @ 2.1GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                17
  Thread(s) per core:                   1
  Core(s) per socket:                   160
  Socket(s):                            2
  Stepping:                             0
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   101%
```

(Continued on next page)

Platform Notes (Continued)

```
CPU max MHz:                          2100.0000
CPU min MHz:                          1500.0000
BogoMIPS:                             4193.53
Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                      pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                      rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                      extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                      sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                      perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                      ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                      smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                      cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                      xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                      pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                      avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                      avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                      movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                      flush_l1d debug_swap
Virtualization:                       AMD-V
L1d cache:                            15 MiB (320 instances)
L1i cache:                            10 MiB (320 instances)
L2 cache:                             320 MiB (320 instances)
L3 cache:                             640 MiB (20 instances)
NUMA node(s):                         20
NUMA node0 CPU(s):                    0-15
NUMA node1 CPU(s):                    16-31
NUMA node2 CPU(s):                    32-47
NUMA node3 CPU(s):                    48-63
NUMA node4 CPU(s):                    64-79
NUMA node5 CPU(s):                    80-95
NUMA node6 CPU(s):                    96-111
NUMA node7 CPU(s):                    112-127
NUMA node8 CPU(s):                    128-143
NUMA node9 CPU(s):                    144-159
NUMA node10 CPU(s):                   160-175
NUMA node11 CPU(s):                   176-191
NUMA node12 CPU(s):                   192-207
NUMA node13 CPU(s):                   208-223
NUMA node14 CPU(s):                   224-239
NUMA node15 CPU(s):                   240-255
NUMA node16 CPU(s):                   256-271
NUMA node17 CPU(s):                   272-287
NUMA node18 CPU(s):                   288-303
NUMA node19 CPU(s):                   304-319
Vulnerability Gather data sampling:   Not affected
Vulnerability Itlb multihit:          Not affected
Vulnerability L1tf:                   Not affected
Vulnerability Mds:                    Not affected
Vulnerability Meltdown:               Not affected
Vulnerability Mmio stale data:        Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:               Not affected
Vulnerability Spec rstack overflow:   Not affected
Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      15M   12 Data            1    64        1             64
     L1i       32K      10M    8 Instruction     1    64        1             64
     L2         1M     320M   16 Unified         2  1024        1             64
     L3        32M     640M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 20 nodes (0-19)
  node 0 cpus: 0-15
  node 0 size: 77030 MB
  node 0 free: 76630 MB
  node 1 cpus: 16-31
  node 1 size: 77409 MB
  node 1 free: 77300 MB
  node 2 cpus: 32-47
  node 2 size: 77407 MB
  node 2 free: 77296 MB
  node 3 cpus: 48-63
  node 3 size: 77373 MB
  node 3 free: 77258 MB
  node 4 cpus: 64-79
  node 4 size: 77411 MB
  node 4 free: 77315 MB
  node 5 cpus: 80-95
  node 5 size: 77411 MB
  node 5 free: 77311 MB
  node 6 cpus: 96-111
  node 6 size: 77411 MB
  node 6 free: 77321 MB
  node 7 cpus: 112-127
  node 7 size: 77409 MB
  node 7 free: 77312 MB
  node 8 cpus: 128-143
  node 8 size: 77409 MB
  node 8 free: 77315 MB
  node 9 cpus: 144-159
  node 9 size: 77407 MB
  node 9 free: 77309 MB
  node 10 cpus: 160-175
  node 10 size: 77409 MB
  node 10 free: 77208 MB
  node 11 cpus: 176-191
  node 11 size: 77409 MB
  node 11 free: 77201 MB
  node 12 cpus: 192-207
  node 12 size: 77407 MB
  node 12 free: 77235 MB
  node 13 cpus: 208-223
  node 13 size: 77411 MB
  node 13 free: 77264 MB
  node 14 cpus: 224-239
  node 14 size: 77411 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 14 free: 77289 MB
   node 15 cpus: 240-255
   node 15 size: 77411 MB
   node 15 free: 76189 MB
   node 16 cpus: 256-271
   node 16 size: 77411 MB
   node 16 free: 77256 MB
   node 17 cpus: 272-287
   node 17 size: 77409 MB
   node 17 free: 77074 MB
   node 18 cpus: 288-303
   node 18 size: 77409 MB
   node 18 free: 77096 MB
   node 19 cpus: 304-319
   node 19 size: 77244 MB
   node 19 free: 76981 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
     0:  10  11  11  11  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32
     1:  11  10  11  11  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32
     2:  11  11  10  11  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32
     3:  11  11  11  10  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32
     4:  11  11  11  11  10  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32
     5:  12  12  12  12  12  10  11  11  11  11  32  32  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  11  10  11  11  11  32  32  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  11  11  10  11  11  32  32  32  32  32  32  32  32  32  32
     8:  12  12  12  12  12  11  11  11  10  11  32  32  32  32  32  32  32  32  32  32
     9:  12  12  12  12  12  11  11  11  11  10  32  32  32  32  32  32  32  32  32  32
    10:  32  32  32  32  32  32  32  32  32  32  10  11  11  11  11  12  12  12  12  12
    11:  32  32  32  32  32  32  32  32  32  32  11  10  11  11  11  12  12  12  12  12
    12:  32  32  32  32  32  32  32  32  32  32  11  11  10  11  11  12  12  12  12  12
    13:  32  32  32  32  32  32  32  32  32  32  11  11  11  10  11  12  12  12  12  12
    14:  32  32  32  32  32  32  32  32  32  32  11  11  11  11  10  12  12  12  12  12
    15:  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  10  11  11  11  11
    16:  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  10  11  11  11
    17:  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  11  10  11  11
    18:  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  11  11  10  11
    19:  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584763080 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jan 22 11:02

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
```

(Continued on next page)

Platform Notes (Continued)

```
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
                   ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                   smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
  indirect         pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=c70d6b0a-e893-482b-b564-48624143e39e
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 285:
    current policy: frequency should be within 1.50 GHz and 2.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  No current active profile.

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
```

(Continued on next page)

Platform Notes (Continued)

```
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017_new
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda3      btrfs  407G   32G  371G   8% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385G11-006

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    10x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
    14x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      2.30
   BIOS Date:         01/17/2025
   BIOS Revision:     2.30
   Firmware Revision: 1.63
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:
```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:
```
-Wno-unused-command-line-argument
```

Fortran benchmarks:
```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

(Continued on next page)

Peak Optimization Flags (Continued)

657.xz_s (continued):
-lamdlibm -lamdalloc -lflang

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-22 04:00:01-0500.
Report generated on 2025-05-08 10:00:16 by CPU2017 PS formatter v6716.
Originally published on 2025-05-06.