



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3


**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

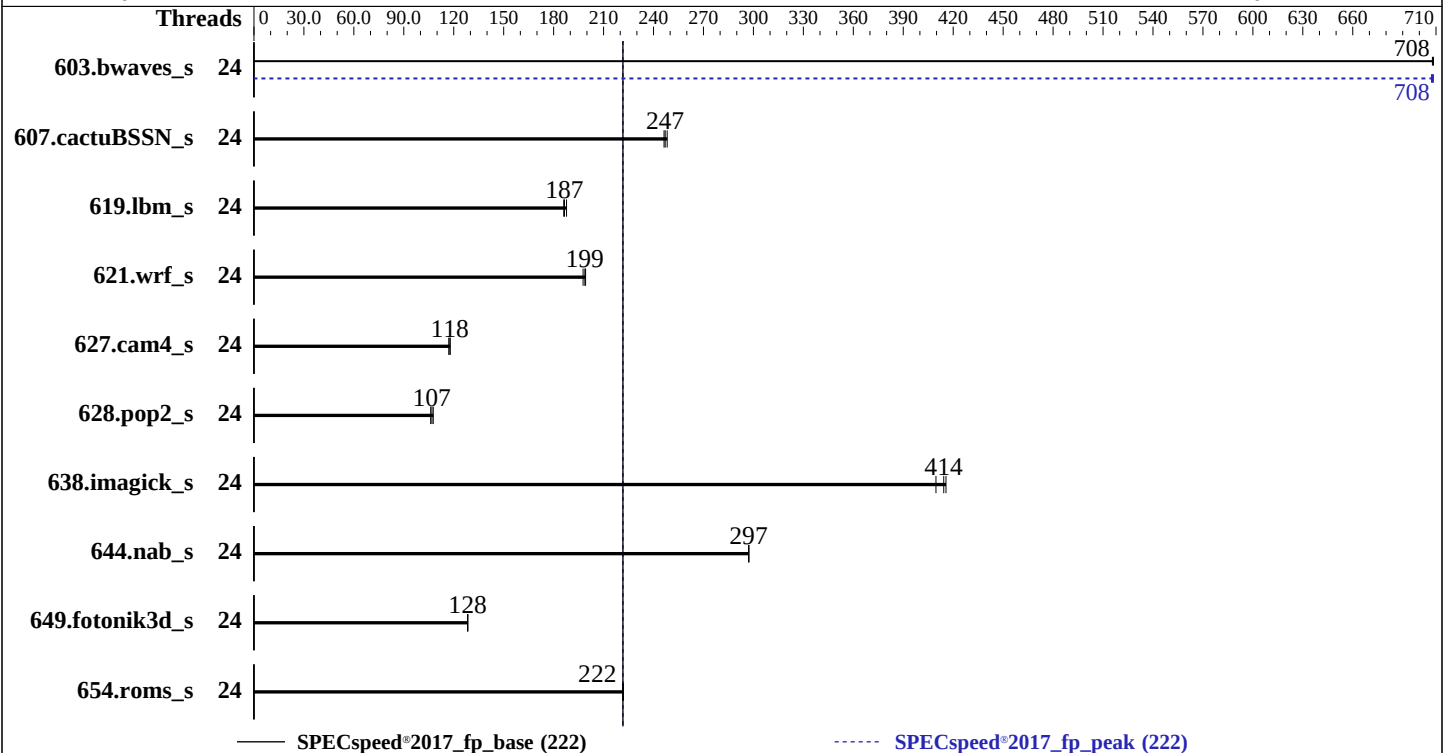

## Hardware

CPU Name: Intel Xeon 6520P  
Max MHz: 4000  
Nominal: 2400  
Enabled: 24 cores, 1 chip  
Orderable: 1 Chip  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 144 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
Storage: 1 x 1.2 TB NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECspeed®2017\_fp\_base = 222

SPECspeed®2017\_fp\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Results Table

| Benchmark       | Base    |         |       |             |            |             |            | Peak    |         |       |             |            |             |            |
|-----------------|---------|---------|-------|-------------|------------|-------------|------------|---------|---------|-------|-------------|------------|-------------|------------|
|                 | Threads | Seconds | Ratio | Seconds     | Ratio      | Seconds     | Ratio      | Threads | Seconds | Ratio | Seconds     | Ratio      | Seconds     | Ratio      |
| 603.bwaves_s    | 24      | 83.3    | 708   | 83.3        | 708        | <b>83.3</b> | <b>708</b> | 24      | 83.4    | 707   | <b>83.3</b> | <b>708</b> | 83.3        | 708        |
| 607.cactuBSSN_s | 24      | 67.2    | 248   | <b>67.5</b> | <b>247</b> | 67.7        | 246        | 24      | 67.2    | 248   | <b>67.5</b> | <b>247</b> | 67.7        | 246        |
| 619.lbm_s       | 24      | 28.1    | 186   | <b>28.1</b> | <b>187</b> | 27.9        | 188        | 24      | 28.1    | 186   | <b>28.1</b> | <b>187</b> | 27.9        | 188        |
| 621.wrf_s       | 24      | 66.9    | 198   | 66.4        | 199        | <b>66.5</b> | <b>199</b> | 24      | 66.9    | 198   | 66.4        | 199        | <b>66.5</b> | <b>199</b> |
| 627.cam4_s      | 24      | 75.8    | 117   | <b>75.3</b> | <b>118</b> | 75.2        | 118        | 24      | 75.8    | 117   | <b>75.3</b> | <b>118</b> | 75.2        | 118        |
| 628.pop2_s      | 24      | 110     | 108   | <b>111</b>  | <b>107</b> | 112         | 106        | 24      | 110     | 108   | <b>111</b>  | <b>107</b> | 112         | 106        |
| 638.imagick_s   | 24      | 34.7    | 416   | 35.2        | 410        | <b>34.8</b> | <b>414</b> | 24      | 34.7    | 416   | 35.2        | 410        | <b>34.8</b> | <b>414</b> |
| 644.nab_s       | 24      | 58.8    | 297   | <b>58.8</b> | <b>297</b> | 58.8        | 297        | 24      | 58.8    | 297   | <b>58.8</b> | <b>297</b> | 58.8        | 297        |
| 649.fotonik3d_s | 24      | 71.0    | 128   | <b>71.0</b> | <b>128</b> | 71.0        | 128        | 24      | 71.0    | 128   | <b>71.0</b> | <b>128</b> | 71.0        | 128        |
| 654.roms_s      | 24      | 71.0    | 222   | <b>71.1</b> | <b>222</b> | 71.1        | 222        | 24      | 71.0    | 222   | <b>71.1</b> | <b>222</b> | 71.1        | 222        |

SPECspeed®2017\_fp\_base = 222

SPECspeed®2017\_fp\_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Memory Patrol Scrubbing set to Disabled

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECspeed®2017\_fp\_base = 222

SPECspeed®2017\_fp\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

Last Level Cache (LLC) Prefetch set to Enabled  
Intel Hyper-Threading set to Disabled  
Minimum Processor Idle Power Core C-State set to C6 as ACPI C3 State  
Workload Profile set to Custom  
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Apr 1 12:32:16 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
12:32:16 up 4 min, 3 users, load average: 0.02, 0.09, 0.05  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 1030035

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 1030035  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeedsproff.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=24 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=24 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeak fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.047/temlogs/preenv.fpspeed.047.0.log --lognum 047.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6520P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000380
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 24
siblings        : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             24
On-line CPU(s) list: 0-23
Vendor ID:          GenuineIntel
BIOS Vendor ID:     Intel(R) Corporation
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

Model name: Intel(R) Xeon(R) 6520P  
BIOS Model name: Intel(R) Xeon(R) 6520P CPU @ 2.4GHz  
BIOS CPU family: 179  
CPU family: 6  
Model: 173  
Thread(s) per core: 1  
Core(s) per socket: 24  
Socket(s): 1  
Stepping: 1  
BogoMIPS: 4800.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cat\_l2 cdp\_l3 intel\_ppin cdp\_l2 ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect user\_shstk avx\_vnni avx512\_bf16 wbnoinvd dtherm ida arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri movdir64b enqcmd fsrm md\_clear serialize tsxldtrk pconfig arch\_lbr ibt amx\_bf16 avx512\_fp16 amx\_tile amx\_int8 flush\_lid arch\_capabilities  
Virtualization: VT-x  
L1d cache: 1.1 MiB (24 instances)  
L1i cache: 1.5 MiB (24 instances)  
L2 cache: 48 MiB (24 instances)  
L3 cache: 144 MiB (1 instance)  
NUMA node(s): 1  
NUMA node0 CPU(s): 0-23  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 48K      | 1.1M     | 12   | Data        | 1     | 64     | 1        | 64             |
| L1i  | 64K      | 1.5M     | 16   | Instruction | 1     | 64     | 1        | 64             |
| L2   | 2M       | 48M      | 16   | Unified     | 2     | 2048   | 1        | 64             |
| L3   | 144M     | 144M     | 16   | Unified     | 3     | 147456 | 1        | 64             |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-23
node 0 size: 257533 MB
node 0 free: 256616 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 263714412 kB
```

10. who -r

```
run-level 3 Apr 1 12:28
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                          |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections<br>nvmmf-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4<br>wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny                                                                               |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                  |
| disabled        | boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once<br>haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@<br>systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext<br>systemd-time-wait-sync systemd-timesyncd |
| indirect        | systemd-userdbd wickedd                                                                                                                                                                                                                                                                                             |

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6815926d-0e31-407c-9bfc-7d4c1d8acd7f
splash=silent
resume=/dev/disk/by-uuid/3ddd6c4a-76f7-4f45-b79b-814fe2bce522
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 8:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. sysctl

|                             |    |
|-----------------------------|----|
| kernel.numa_balancing       | 0  |
| kernel.randomize_va_space   | 2  |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes   | 0  |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   1.2T  253G  946G  22% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute DL320 Gen12
Product Family:  ProLiant
Serial:          FLLKN48DYT
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400
-----
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.20  
BIOS Date: 02/14/2025  
BIOS Revision: 1.20  
Firmware Revision: 1.10

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECspeed®2017\_fp\_base = 222

SPECspeed®2017\_fp\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECspeed®2017\_fp\_base = 222

SPECspeed®2017\_fp\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.40 GHz, Intel Xeon 6520P)

**SPECspeed®2017\_fp\_base = 222**

**SPECspeed®2017\_fp\_peak = 222**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-01 03:02:16-0400.

Report generated on 2025-05-08 10:01:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.