



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

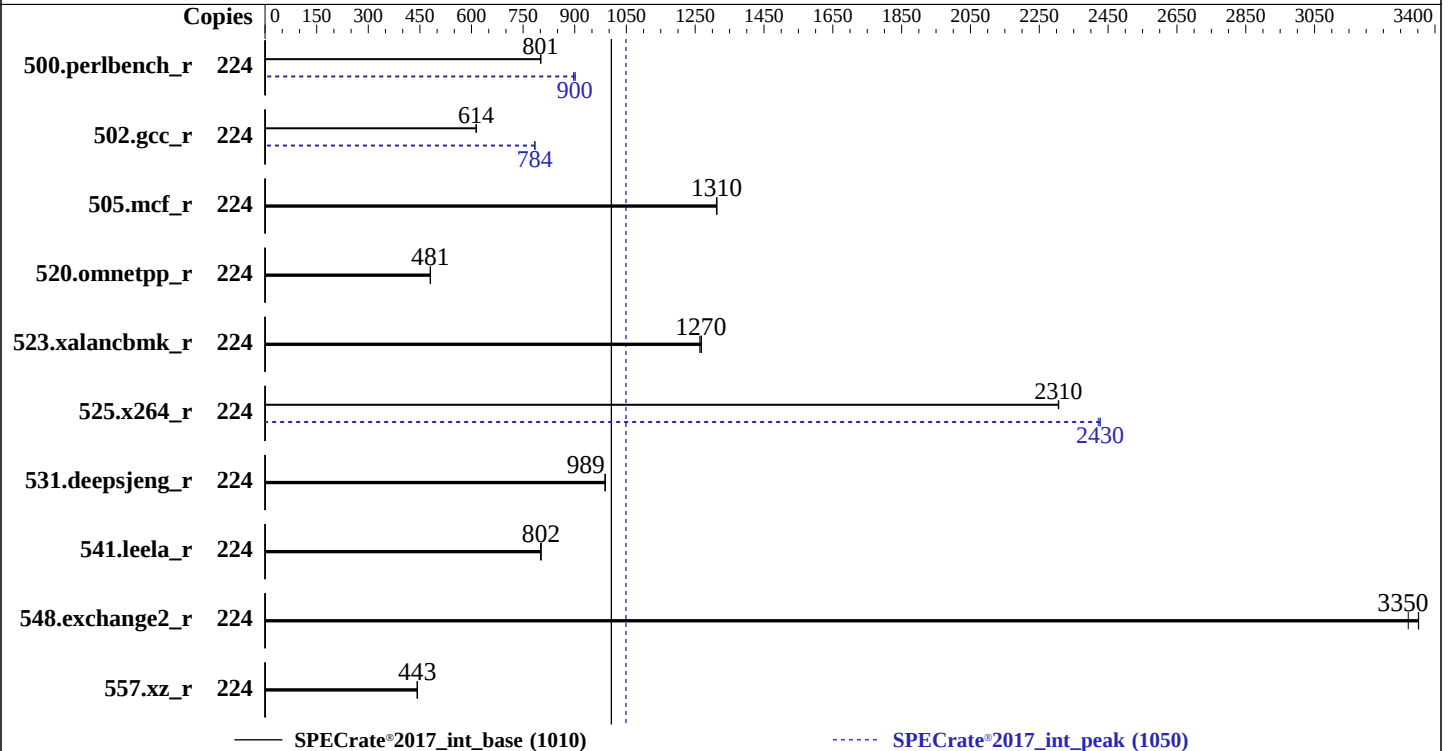

Hardware

CPU Name: Intel Xeon 6746E
Max MHz: 2700
Nominal: 2000
Enabled: 224 cores, 2 chips
Orderable: 2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per core
L3: 96 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.2 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	445	801	445	802	446	800	224	396	900	398	896	396	901
502.gcc_r	224	516	614	517	613	517	614	224	405	784	405	784	404	784
505.mcf_r	224	276	1310	276	1310	276	1310	224	276	1310	276	1310	276	1310
520.omnetpp_r	224	611	481	612	481	612	480	224	611	481	612	481	612	480
523.xalancbmk_r	224	187	1270	187	1270	187	1260	224	187	1270	187	1270	187	1260
525.x264_r	224	170	2310	170	2310	170	2310	224	162	2430	162	2420	162	2430
531.deepsjeng_r	224	260	988	260	989	260	989	224	260	988	260	989	260	989
541.leela_r	224	462	802	463	801	462	802	224	462	802	463	801	462	802
548.exchange2_r	224	175	3350	175	3350	177	3320	224	175	3350	175	3350	177	3320
557.xz_r	224	547	443	547	443	547	442	224	547	443	547	443	547	442

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
Workload Profile = HPC
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 14 23:01:14 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
23:01:14 up 5 min, 1 user, load average: 0.00, 0.04, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:56 2.00s 1.77s 0.09s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126434
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126434
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=224 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=224 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6746E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x3000330
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 112
siblings       : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-111
physical id 1: core ids 0-111
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: apicids

512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	224
On-line CPU(s) list:	0-223
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6746E
BIOS Model name:	Intel(R) Xeon(R) 6746E CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	175
Thread(s) per core:	1
Core(s) per socket:	112
Socket(s):	2
Stepping:	3
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd frsm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	7 MiB (224 instances)
L1i cache:	14 MiB (224 instances)
L2 cache:	224 MiB (56 instances)
L3 cache:	192 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-111
NUMA node1 CPU(s):	112-223
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	64K	14M	8	Instruction	1	128	1	64
L2	4M	224M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-111
node 0 size: 515608 MB
node 0 free: 514295 MB
node 1 cpus: 112-223
node 1 size: 516026 MB
node 1 free: 514698 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1056394116 kB

10. who -r

run-level 3 Apr 14 22:56

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autovast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex systemd-time-wait-sync

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Platform Notes (Continued)

indirect systemd-timesyncd udisks2 vncserver@
systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=895dcdee-794c-425f-842f-d00281f30563
splash=silent
mitigations=auto
quiet
security=apparmor
nomodeset

14. cpupower frequency-info
analyzing CPU 127:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM, Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Platform Notes (Continued)

max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 892G 27G 865G 3% /

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 5600

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.2
BIOS Date: 02/20/2025
BIOS Revision: 5.35

Compiler Version Notes

=====

```
C | 502.gcc_r(peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

```
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

```
C | 502.gcc_r(peak)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Peak Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

CloudDC SuperServer SYS-222C-TN
(X14DBHM , Intel Xeon 6746E)

SPECrate®2017_int_base = 1010

SPECrate®2017_int_peak = 1050

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2025

Hardware Availability: Sep-2024

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-14 11:01:13-0400.

Report generated on 2025-05-08 10:04:22 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.