



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523


Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

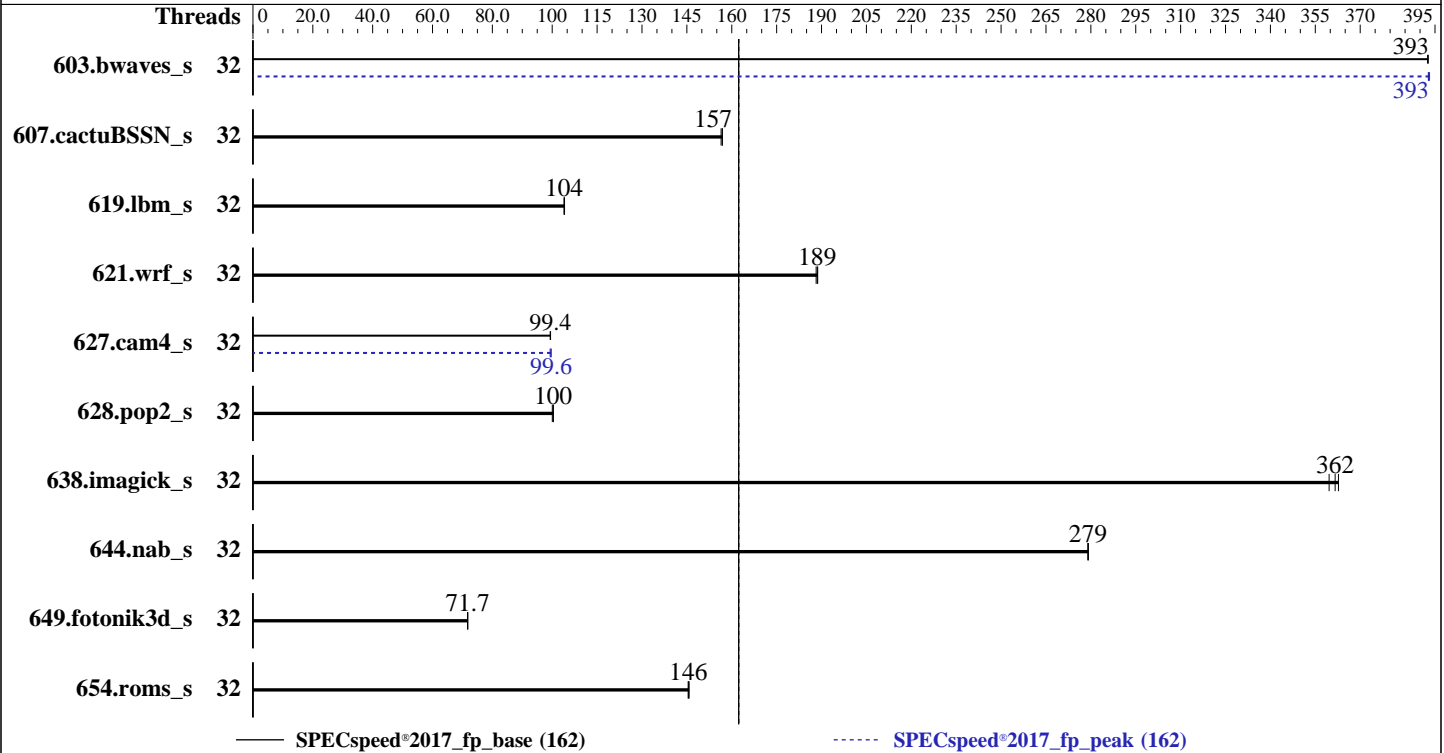

Hardware

CPU Name: Intel Xeon Gold 6444Y
 Max MHz: 4000
 Nominal: 3600
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (6 x 32 GB 1Rx4 PC5-5600B-R, running at 4800)
 Storage: 125 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 1.26 released Apr-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECSpeed®2017_fp_base = 162

SPECSpeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	150	393	150	393	150	393	32	150	393	150	393	150	393
607.cactuBSSN_s	32	106	157	107	156	106	157	32	106	157	107	156	106	157
619.lbm_s	32	50.3	104	50.3	104	50.4	104	32	50.3	104	50.3	104	50.4	104
621.wrf_s	32	70.1	189	70.1	189	70.3	188	32	70.1	189	70.1	189	70.3	188
627.cam4_s	32	89.1	99.4	89.1	99.4	89.2	99.3	32	89.3	99.3	89.0	99.6	89.0	99.6
628.pop2_s	32	118	100	118	100	119	100	32	118	100	118	100	119	100
638.imagick_s	32	39.8	363	39.9	362	40.1	360	32	39.8	363	39.9	362	40.1	360
644.nab_s	32	62.6	279	62.6	279	62.6	279	32	62.6	279	62.6	279	62.6	279
649.fotonik3d_s	32	127	71.8	127	71.7	127	71.7	32	127	71.8	127	71.7	127	71.7
654.roms_s	32	108	145	108	146	108	146	32	108	145	108	146	108	146

SPECSpeed®2017_fp_base = **162**

SPECSpeed®2017_fp_peak = **162**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu17/lib/intel64:/mnt/ramdisk/cpu17/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes

BIOS settings: Default

Sysinfo program /mnt/ramdisk/cpul7/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 1 15:22:28 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:22:28 up 16:19, 1 user, load average: 6.71, 6.16, 3.67
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1    -             Wed23      3:13m    0.76s   0.00s  sh
reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 768718
max locked memory       (kbytes, -l) 8192
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECSpeed®2017_fp_base = 162

SPECSpeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

```

max memory size      (kbytes, -m) unlimited
open files           (-n) 1024
pipe size            (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority   (-r) 0
stack size           (kbytes, -s) unlimited
cpu time             (seconds, -t) unlimited
max user processes   (-u) 768718
virtual memory       (kbytes, -v) unlimited
file locks           (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=32 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=32 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu17

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6444Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000590
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 16
siblings      : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6444Y
BIOS Model name:       Intel(R) Xeon(R) Gold 6444Y CPU @ 3.6GHz

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

```

BIOS CPU family:          179
CPU family:                6
Model:                     143
Thread(s) per core:       2
Core(s) per socket:       16
Socket(s):                 1
Stepping:                 8
CPU(s) scaling MHz:       60%
CPU max MHz:              4000.0000
CPU min MHz:              800.0000
BogoMIPS:                 7200.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                          ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                          vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                          rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                          clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                          split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                          arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                          avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                          bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                          serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                          amx_int8 flush_l1d arch_capabilities
Virtualization:           VT-x
L1d cache:                768 KiB (16 instances)
L1i cache:                512 KiB (16 instances)
L2 cache:                 32 MiB (16 instances)
L3 cache:                 45 MiB (1 instance)
NUMA node(s):             1
NUMA node0 CPU(s):       0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                          PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	45M	45M	15	Unified	3	49152	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 192205 MB
node 0 free: 154296 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 196818676 kB
```

10. who -r

```
run-level 3 Apr 30 23:03
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsidd
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=e40d4a6f-b67a-430a-86f1-3d3ea26a7eb1
splash=silent
resume=/dev/disk/by-uuid/767864c6-130c-4bba-bf53-bf715ee2aa3c
mitigations=auto
quiet
security=apparmor
crashkernel=355M,high
crashkernel=72M,low
```

14. cpupower frequency-info

```
analyzing CPU 24:
current policy: frequency should be within 800 MHz and 4.00 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpul7
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  35G  91G  28% /mnt/ramdisk

-----
20. /sys/devices/virtual/dmi/id
Vendor:      HEXADATA
Product:     HD-RS4100

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Hynix TR532G56S446 32 GB 1 rank 5600, configured at 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.26
BIOS Date: 04/17/2023
BIOS Revision: 5.29

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

SPECspeed®2017_fp_base = 162

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Date: May-2025

Test Sponsor: Esconet Technologies Ltd.

Hardware Availability: Apr-2023

Tested by: Esconet Technologies Ltd.

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_base = 162

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using Fortran, C, and C++:

`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:

`icx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`619.lbm_s: basepeak = yes`

`638.imagick_s: basepeak = yes`

`644.nab_s: basepeak = yes`

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Esconet Technologies Ltd.

SPECspeed®2017_fp_base = 162

Hexadata HD-RS4100 Ver: SPR-001
(Intel Xeon Gold 6444Y, 3.60 GHz)

SPECspeed®2017_fp_peak = 162

CPU2017 License: 6523

Test Sponsor: Esconet Technologies Ltd.

Tested by: Esconet Technologies Ltd.

Test Date: May-2025

Hardware Availability: Apr-2023

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Hexadata-Platform-Flags-Intel-rev1.7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-01 05:52:28-0400.

Report generated on 2025-05-20 16:00:27 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-20.