



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

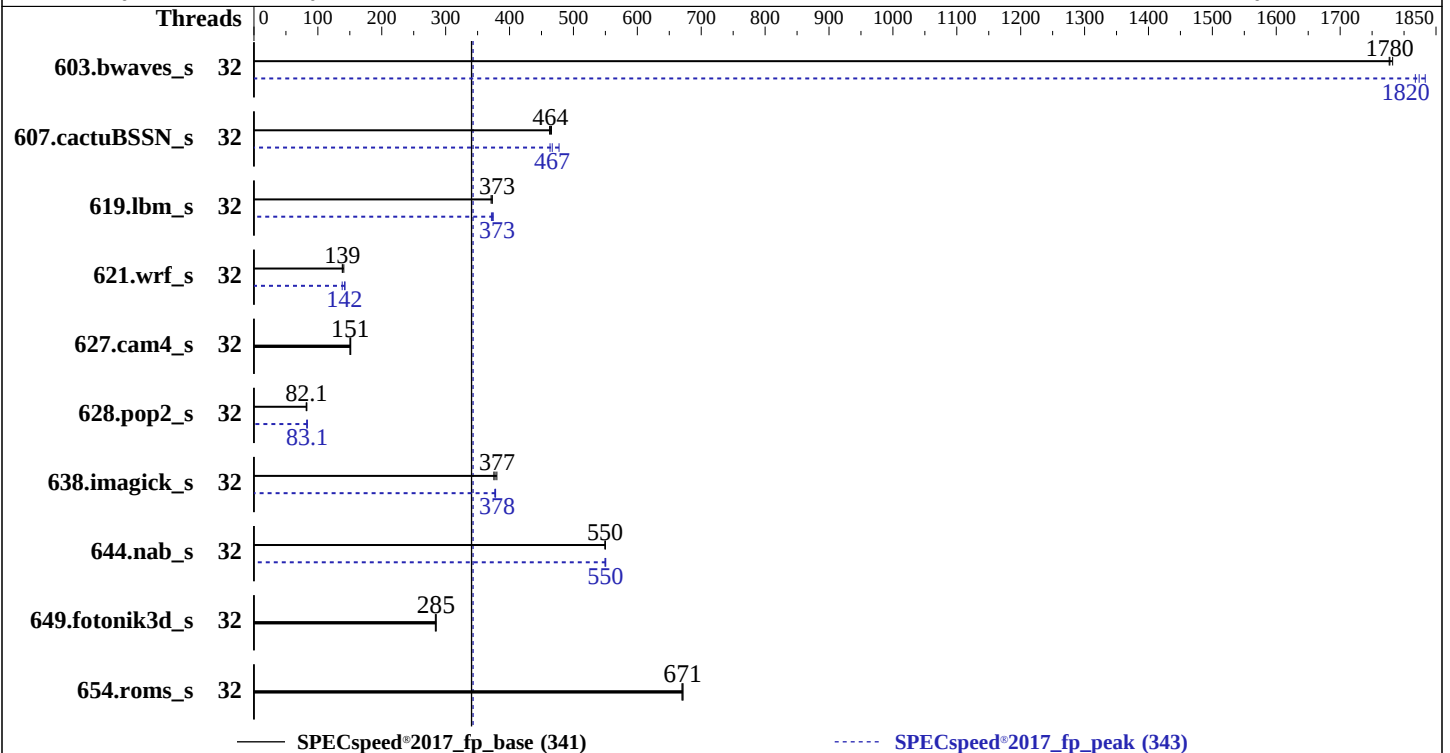

Hardware

CPU Name: AMD EPYC 9175F
Max MHz: 5000
Nominal: 4200
Enabled: 32 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 1 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 6.4 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 4.3.5f released Feb-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	33.1	1780	33.2	1780	<u>33.2</u>	<u>1780</u>	32	<u>32.4</u>	<u>1820</u>	32.2	1830	32.5	1820
607.cactuBSSN_s	32	36.0	463	35.8	466	<u>35.9</u>	<u>464</u>	32	<u>35.7</u>	<u>467</u>	34.9	477	36.0	463
619.lbm_s	32	14.0	373	<u>14.1</u>	<u>373</u>	14.1	371	32	<u>14.0</u>	<u>373</u>	14.1	372	14.0	374
621.wrf_s	32	<u>95.3</u>	<u>139</u>	94.0	141	95.7	138	32	92.8	142	<u>93.2</u>	<u>142</u>	95.8	138
627.cam4_s	32	<u>58.7</u>	<u>151</u>	59.0	150	58.5	151	32	<u>58.7</u>	<u>151</u>	59.0	150	58.5	151
628.pop2_s	32	<u>145</u>	<u>82.1</u>	143	82.8	145	81.8	32	<u>143</u>	<u>83.1</u>	142	83.6	144	82.6
638.imagick_s	32	37.9	380	<u>38.2</u>	<u>377</u>	38.4	375	32	<u>38.2</u>	<u>378</u>	38.1	378	38.3	377
644.nab_s	32	31.8	550	<u>31.8</u>	<u>550</u>	31.8	549	32	<u>31.8</u>	<u>550</u>	31.7	551	31.8	550
649.fotonik3d_s	32	32.1	284	<u>32.0</u>	<u>285</u>	32.0	285	32	32.1	284	<u>32.0</u>	<u>285</u>	32.0	285
654.roms_s	32	23.5	670	<u>23.5</u>	<u>671</u>	23.5	671	32	23.5	670	<u>23.5</u>	<u>671</u>	23.5	671

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri May 23 02:59:22 2025

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:59:22 up 2:44, 3 users, load average: 0.00, 0.04, 0.62
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -             00:21   18.00s 0.68s  0.07s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190843
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

max user processes (-u) 6190843
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py -b fpspeed
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9175F 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 16
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 1: core ids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 0: apicids 0,16,32,48,64,80,96,112,128,144,160,176,192,208,224,240
physical id 1: apicids 256,272,288,304,320,336,352,368,384,400,416,432,448,464,480,496
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9175F 16-Core Processor
BIOS Model name:	AMD EPYC 9175F 16-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	1
Core(s) per socket:	16
Socket(s):	2
Stepping:	1

Unknown CPU @ 4.2GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Frequency boost: enabled
CPU(s) scaling MHz: 82%
CPU max MHz: 5003.9058
CPU min MHz: 1500.0000
BogoMIPS: 8387.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap
Virtualization: AMD-V
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 1 GiB (32 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 0 cpus: 0-15
node 0 size: 773685 MB
node 0 free: 772467 MB
node 1 cpus: 16-31
node 1 size: 774051 MB
node 1 free: 773214 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

```
9. /proc/meminfo
MemTotal:      1584883036 kB
```

```
10. who -r
run-level 3 May 23 00:14
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target   Status
multi-user       running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
virtqemu-wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kv_daemon hv_vss_daemon
hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
virtnetworkd virtnodevd virtnwfilterd virtsecret virtstoraged
indirect pcsd systemd-userdbd tftp wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=657ee49c-2d95-4700-b85a-ada6d25f50ed
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 9:
current policy: frequency should be within 1.50 GHz and 4.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Supported: yes
Active: yes

15. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages  0
vm.swappiness               1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode        1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdc3 btrfs 5.9T 11G 5.9T 1% /home
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      Cisco Systems Inc
Product:     UCSX-215C-M8
Product Family: Cisco UCS Rack Server
Serial:      FCH282172A1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

20x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
4x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X215M8.4.3.5f.0.0218251523
BIOS Date: 02/18/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fvecLib=AMDLibm -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fvecLib=AMDLibm -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fvecLib=AMDLibm -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

627.cam4_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fvecLib=AMDLibm -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

628.pop2_s (continued):

```
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fscalar-transform  
-fvector-transform -Mrecursive -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5  
-fvecLib=AMDLibm -ffast-math -fopenmp -flto -DSPEC_OPENMP  
-fremap-arrays -fstrip-mining -fstruct-layout=9  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100  
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 343

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-23 02:59:22-0400.
Report generated on 2025-06-17 18:15:53 by CPU2017 PDF formatter v6716.
Originally published on 2025-06-17.