



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

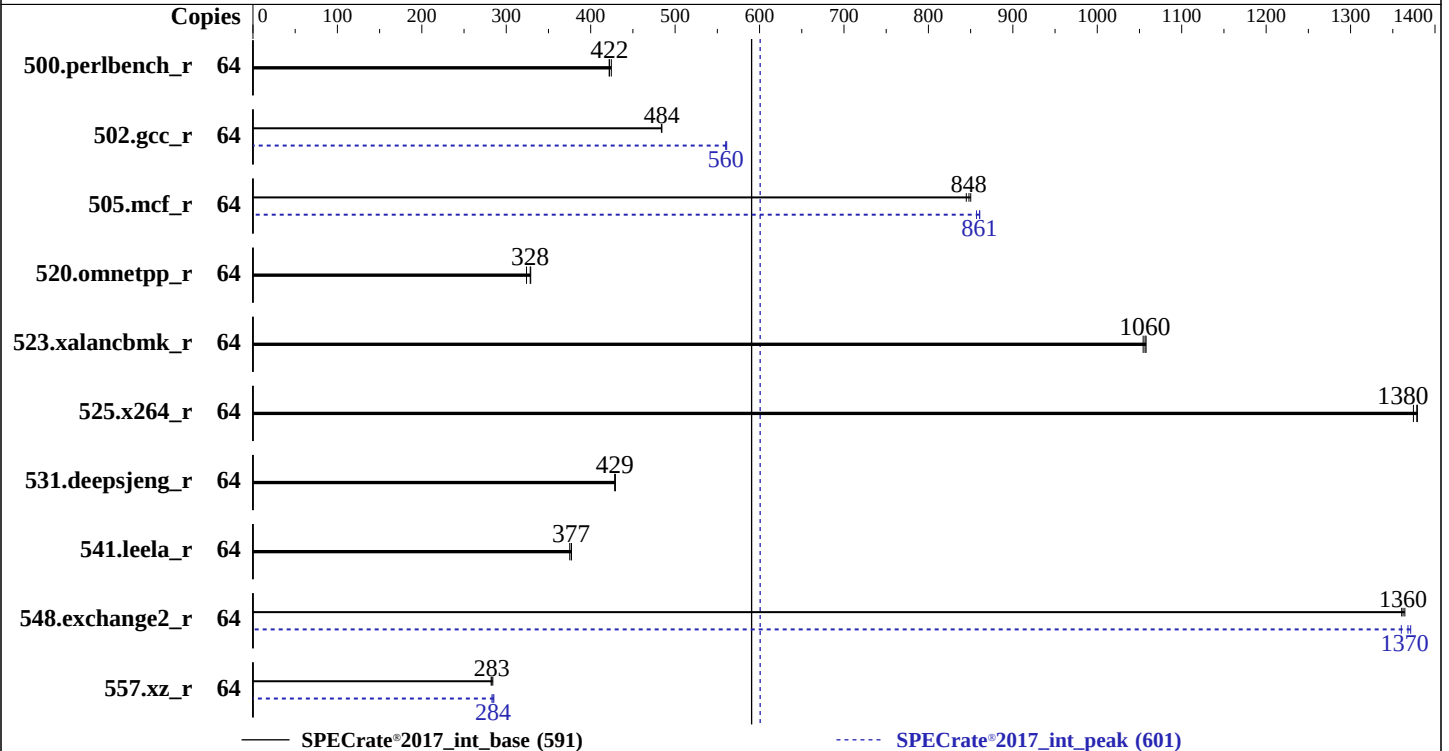

Hardware

CPU Name: AMD EPYC 9175F
Max MHz: 5000
Nominal: 4200
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 1 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 6.4 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 4.3.5f released Feb-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	242	422	240	424	<u>241</u>	<u>422</u>	64	242	422	240	424	<u>241</u>	<u>422</u>
502.gcc_r	64	187	484	187	484	187	484	64	162	560	<u>162</u>	<u>560</u>	162	561
505.mcf_r	64	122	845	<u>122</u>	848	122	850	64	121	857	120	861	<u>120</u>	861
520.omnetpp_r	64	<u>256</u>	328	259	324	255	329	64	<u>256</u>	328	259	324	255	329
523.xalancbmk_r	64	63.9	1060	64.1	1050	64.0	1060	64	63.9	1060	64.1	1050	64.0	1060
525.x264_r	64	81.5	1370	81.3	1380	81.3	1380	64	81.5	1370	81.3	1380	81.3	1380
531.deepsjeng_r	64	171	429	171	429	<u>171</u>	429	64	171	429	171	429	<u>171</u>	429
541.leela_r	64	281	377	<u>281</u>	<u>377</u>	282	375	64	281	377	<u>281</u>	<u>377</u>	282	375
548.exchange2_r	64	123	1360	<u>123</u>	1360	123	1360	64	122	1370	123	1360	<u>123</u>	1370
557.xz_r	64	243	284	<u>244</u>	<u>283</u>	245	282	64	242	285	244	283	<u>243</u>	<u>284</u>

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu May 22 06:30:59 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
06:30:59 up 3:03, 4 users, load average: 0.00, 0.00, 0.14
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -              03:28   19.00s 0.76s  0.08s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190769
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190769
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b intrate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --noprerev --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9175F 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

TLB size : 192 4K pages
cpu cores : 16
siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
physical id 1: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
physical id 0: apicids
0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113,128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241
physical id 1: apicids
256-257,272-273,288-289,304-305,320-321,336-337,352-353,368-369,384-385,400-401,416-417,432-433,448-449,464-465,480-481,496-497

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	64
On-line CPU(s) list:	0-63
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9175F 16-Core Processor
BIOS Model name:	AMD EPYC 9175F 16-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	85%
CPU max MHz:	5003.9058
CPU min MHz:	1500.0000
BogoMIPS:	8387.40
Flags:	fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat pse36_clflush_mmx_fxsr_sse_sse2_ht_syscall_nx_mmxext_fxsr_opt_pdpe1gb rdtscp_lm_constant_tsc_rep_good_amd_lbr_v2_nopl_nonstop_tsc_cpuid extd_apicid_aperfmpperf_rapl_pni_pclmulqdq_monitor_ssse3_fma_cx16_pcid sse4_1_sse4_2_x2apic_movbe_popcnt_aes_xsave_avx_f16c_rdrand_lahf_lm cmp_legacy_svm_extapic_cr8_legacy_abm_sse4a_misalignsse_3dnowprefetch osvw_ibs_skinit_wdt_tce_topoext_perfctr_core_perfctr_nb_bpext perfctr_llc_mwaitx_cpb_cat_l3_cdp_l3_hw_pstate_ssbd_mba_perfmon_v2 ibrs_ibpb_stibp_ibrs_enhanced_vmmcall_fsgsbase_tsc_adjust_bmi1_avx2 smep_bmi2_erms_invpcid_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap avx512ifma_clflushopt_clwb_avx512cd_sha_ni_avx512bw_avx512vl_xsaveopt xsavec_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total cqm_mbm_local_user_shstk_avx_vnni_avx512_bf16_clzero_irperf xsaveerptr_rdprr_wbnoinvd_amd_ppin_cppc_arat_npt_lbrv_svm_lock nrip_save_tsc_scale_vmc_b_clean_flushbyasid_decodeassists_pausefilter pfthreshold_avic_vmsave_vmload_vgif_x2avic_v_spec_ctrl_vnmi avx512vbmi_umip_pku_ospke_avx512_vbmi2_gfni_vaes_vpclmulqdq avx512_vnni_avx512_bitalg_avx512_vpopcntdq_la57_rdpid_bus_lock_detect

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization:

L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 1 GiB (32 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 193118 MB
node 0 free: 192698 MB
node 1 cpus: 4-7,36-39
node 1 size: 193533 MB
node 1 free: 193101 MB
node 2 cpus: 8-11,40-43
node 2 size: 193533 MB
node 2 free: 193089 MB
node 3 cpus: 12-15,44-47
node 3 size: 193533 MB
node 3 free: 193156 MB
node 4 cpus: 16-19,48-51
node 4 size: 193495 MB
node 4 free: 193094 MB
node 5 cpus: 20-23,52-55
node 5 size: 193533 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 5 free: 193187 MB
node 6 cpus: 24-27,56-59
node 6 size: 193533 MB
node 6 free: 193085 MB
node 7 cpus: 28-31,60-63
node 7 size: 193437 MB
node 7 free: 192985 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10
```

```
9. /proc/meminfo
   MemTotal:      1584864100 kB
```

```
10. who -r
    run-level 3 May 22 03:27
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
virtqemu-wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
hwloc-dump-hwdata ipmi ipmievdev iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
nfs-server rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd-generate_opts
snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
systemd-time-wait-sync systemd-timesyncd tcstd udisks2 virtinterfaced virtlockd virtlogd
virtnetworkd virtnodevdev virtnwfilterd virtsecret virtstoraged
indirect pcsd systemd-userdbd tftpd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=657ee49c-2d95-4700-b85a-ada6d25f50ed
splash=silent
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 4:

current policy: frequency should be within 1.50 GHz and 4.20 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc3	btrfs	5.9T	11G	5.9T	1%	/home

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id

Vendor: Cisco Systems Inc
Product: UCSX-215C-M8
Product Family: Cisco UCS Rack Server
Serial: FCH282172A1

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

20x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
4x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X215M8.4.3.5f.0.0218251523
BIOS Date: 02/18/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM

-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r (continued):

-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLibM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLibM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLibM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9175F
4.20 GHz Processor)

SPECrate®2017_int_base = 591

SPECrate®2017_int_peak = 601

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-22 06:30:59-0400.

Report generated on 2025-06-17 18:15:55 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-17.