



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

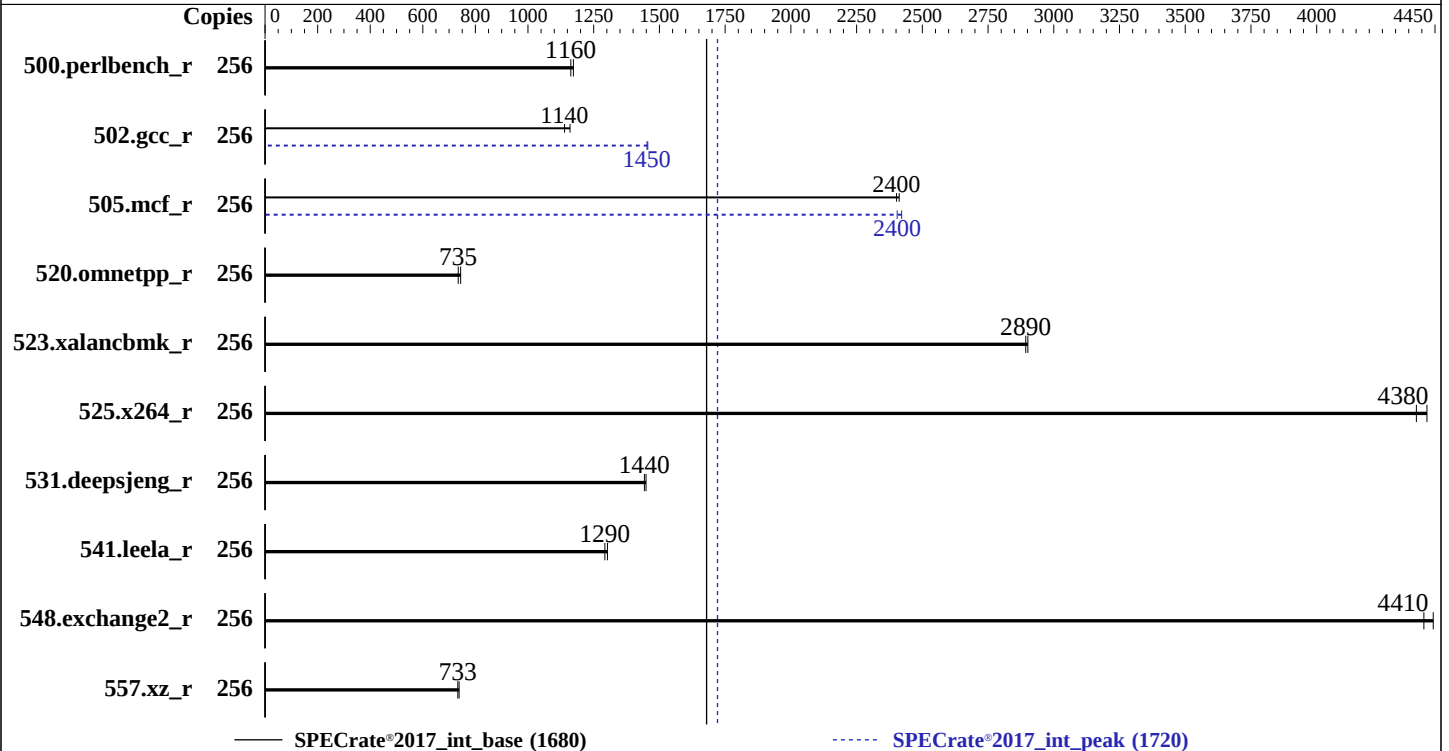

Hardware

CPU Name: AMD EPYC 9575F
Max MHz: 5000
Nominal: 3300
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 130 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
6.8.0-51-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 1.2.1 released May-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	347	1170	350	1160			256	347	1170	350	1160		
502.gcc_r	256	313	1160	318	1140			256	249	1460	250	1450		
505.mcf_r	256	172	2400	172	2410			256	171	2420	172	2400		
520.omnetpp_r	256	451	744	457	735			256	451	744	457	735		
523.xalancbmk_r	256	93.4	2890	93.2	2900			256	93.4	2890	93.2	2900		
525.x264_r	256	102	4380	101	4420			256	102	4380	101	4420		
531.deepsjeng_r	256	203	1440	202	1450			256	203	1440	202	1450		
541.leela_r	256	326	1300	328	1290			256	326	1300	328	1290		
548.exchange2_r	256	151	4440	152	4410			256	151	4440	152	4410		
557.xz_r	256	375	738	377	733			256	375	738	377	733		

SPECrate®2017_int_base = 1680

SPECrate®2017_int_peak = 1720

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled
NUMA Nodes Per Socket : 4

System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link Power Management : Disabled
Periodic Directory Rinse Tuning : Blended
Determinism Control : Manual
Determinism Slider : Power Determinism
Optimizer Mode : Enabled
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR7734-R7725 Mon Jun 16 00:29:01 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux SLR7734-R7725 6.8.0-51-generic #52-Ubuntu SMP PREEMPT_DYNAMIC Thu Dec 5 13:09:44 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
00:29:01 up 1:22, 1 user, load average: 0.30, 0.10, 1.23
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 23:11 21.00s 1.16s 0.30s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6189198
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.2 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002147
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-63
physical id 1:  core ids 0-63
physical id 0:  apicids 0-127
physical id 1:  apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                 256
On-line CPU(s) list:   0-255
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        AMD
Model name:             AMD EPYC 9575F 64-Core Processor
BIOS Model name:        AMD EPYC 9575F 64-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     64
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:    66%
CPU max MHz:            5008.0068
CPU min MHz:            1500.0000
BogoMIPS:               6591.44
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                        xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)

NUMA node(s): 16
NUMA node0 CPU(s): 0-7,128-135
NUMA node1 CPU(s): 8-15,136-143
NUMA node2 CPU(s): 16-23,144-151
NUMA node3 CPU(s): 24-31,152-159
NUMA node4 CPU(s): 32-39,160-167
NUMA node5 CPU(s): 40-47,168-175
NUMA node6 CPU(s): 48-55,176-183
NUMA node7 CPU(s): 56-63,184-191
NUMA node8 CPU(s): 64-71,192-199
NUMA node9 CPU(s): 72-79,200-207
NUMA node10 CPU(s): 80-87,208-215
NUMA node11 CPU(s): 88-95,216-223
NUMA node12 CPU(s): 96-103,224-231
NUMA node13 CPU(s): 104-111,232-239
NUMA node14 CPU(s): 112-119,240-247
NUMA node15 CPU(s): 120-127,248-255

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-IBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0-7,128-135
node 0 size: 96055 MB
node 0 free: 95302 MB
node 1 cpus: 8-15,136-143
node 1 size: 96760 MB
node 1 free: 96456 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

node 2 cpus: 16-23,144-151
node 2 size: 96762 MB
node 2 free: 94348 MB
node 3 cpus: 24-31,152-159
node 3 size: 96760 MB
node 3 free: 96465 MB
node 4 cpus: 32-39,160-167
node 4 size: 96762 MB
node 4 free: 96489 MB
node 5 cpus: 40-47,168-175
node 5 size: 96760 MB
node 5 free: 96452 MB
node 6 cpus: 48-55,176-183
node 6 size: 96762 MB
node 6 free: 96111 MB
node 7 cpus: 56-63,184-191
node 7 size: 96744 MB
node 7 free: 96493 MB
node 8 cpus: 64-71,192-199
node 8 size: 96762 MB
node 8 free: 95966 MB
node 9 cpus: 72-79,200-207
node 9 size: 96760 MB
node 9 free: 96503 MB
node 10 cpus: 80-87,208-215
node 10 size: 96762 MB
node 10 free: 96481 MB
node 11 cpus: 88-95,216-223
node 11 size: 96760 MB
node 11 free: 95885 MB
node 12 cpus: 96-103,224-231
node 12 size: 96719 MB
node 12 free: 96411 MB
node 13 cpus: 104-111,232-239
node 13 size: 96760 MB
node 13 free: 96461 MB
node 14 cpus: 112-119,240-247
node 14 size: 96762 MB
node 14 free: 96463 MB
node 15 cpus: 120-127,248-255
node 15 size: 96720 MB
node 15 free: 92175 MB
node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

9. /proc/meminfo
MemTotal: 1584513772 kB

10. who -r
run-level 3 Jun 15 23:06

11. Systemd service manager version: systemd 255 (255.4-ubuntu8.4)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor apport avahi-daemon blk-availability bluetooth cloud-config cloud-final cloud-init cloud-init-local console-setup cron cups cups-browsed dmesg e2scrub_reap finalrd getty@ gnome-remote-desktop gpu-manager grub-common grub-initrd-fallback kerneloops keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher networking nvme-fc-boot-connections nvme-fc-autoconnect open-iscsi open-vm-tools openvpn pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssl-cert sssd switcheroo-control sysstat systemd-networkd systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	brltty console-getty debug-shell fio ifupdown-wait-online iscsid nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	speech-dispatcher
indirect	saned@ spice-vdagentd sssd-autofs sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock multipath-tools-boot saned screen-cleanup sudo systemd-networkd-wait-online x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-51-generic
root=UUID=8458ae54-58cc-4621-9289-b1d743fde503
ro

14. cpupower frequency-info
analyzing CPU 49:
current policy: frequency should be within 1.50 GHz and 3.30 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3300MHz

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvice	madvice	never
enabled	[always]	madvice	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	130G	3.3G	127G	3%	/mnt/ramdisk

21. /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge R7725
Product Family:	PowerEdge

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Platform Notes (Continued)

Serial: SLR7734

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

23x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400
1x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.

BIOS Version: 1.2.1

BIOS Date: 05/01/2025

BIOS Revision: 1.2

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Compiler Version Notes (Continued)

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)  
    | 541.leela_r(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran | 548.exchange2_r(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

SPECrate®2017_int_peak = 1720

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017_int_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

SPECrate®2017_int_peak = 1720

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt -lamdlibm

-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1680

SPECrate®2017_int_peak = 1720

PowerEdge R7725 (AMD EPYC 9575F 64-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Mar-2025

Software Availability: Dec-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-15 20:29:00-0400.

Report generated on 2025-07-01 19:09:45 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.