



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

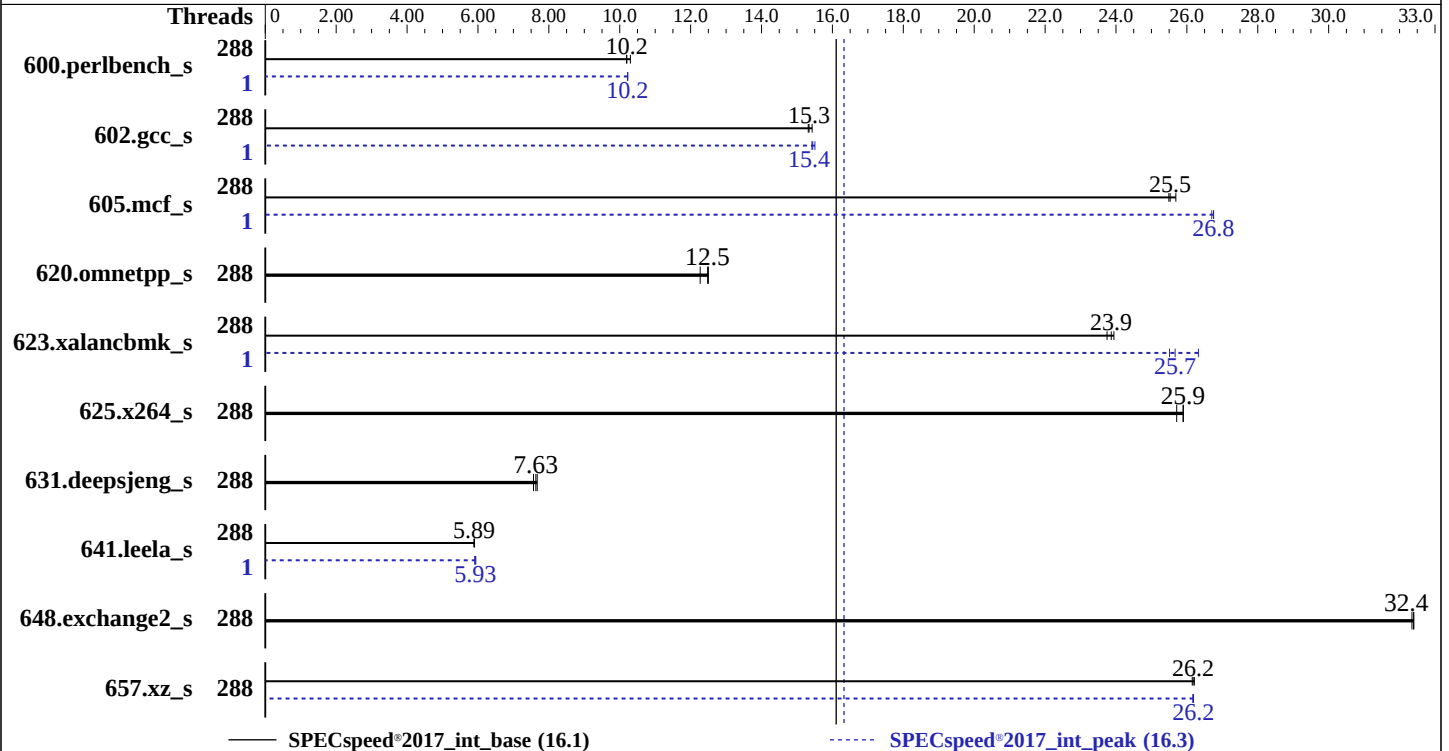

### Hardware

CPU Name: AMD EPYC 9825  
Max MHz: 3700  
Nominal: 2200  
Enabled: 288 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 384 MB I+D on chip per chip, 32 MB shared / 12 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
kernel version 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 4.3.5c released Dec-2024  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Results Table

| Benchmark       | Base    |                    |                    |                   |                    |                    |                    | Peak    |                    |                    |                   |                    |                    |                    |
|-----------------|---------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|---------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|
|                 | Threads | Seconds            | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              | Threads | Seconds            | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              |
| 600.perlbench_s | 288     | 172                | 10.3               | 174               | 10.2               | <b><u>174</u></b>  | <b><u>10.2</u></b> | 1       | <b><u>174</u></b>  | <b><u>10.2</u></b> | 174               | 10.2               | 174                | 10.2               |
| 602.gcc_s       | 288     | 258                | 15.4               | 260               | 15.3               | <b><u>260</u></b>  | <b><u>15.3</u></b> | 1       | 258                | 15.4               | <b><u>258</u></b> | <b><u>15.4</u></b> | 257                | 15.5               |
| 605.mcf_s       | 288     | <b><u>185</u></b>  | <b><u>25.5</u></b> | 185               | 25.5               | 184                | 25.7               | 1       | <b><u>176</u></b>  | <b><u>26.8</u></b> | 176               | 26.8               | 177                | 26.7               |
| 620.omnetpp_s   | 288     | 133                | 12.3               | <b><u>131</u></b> | <b><u>12.5</u></b> | 130                | 12.5               | 288     | 133                | 12.3               | <b><u>131</u></b> | <b><u>12.5</u></b> | 130                | 12.5               |
| 623.xalanchmk_s | 288     | <b><u>59.4</u></b> | <b><u>23.9</u></b> | 59.7              | 23.7               | 59.2               | 23.9               | 1       | <b><u>55.2</u></b> | <b><u>25.7</u></b> | 55.5              | 25.5               | 53.8               | 26.3               |
| 625.x264_s      | 288     | 68.6               | 25.7               | 68.1              | 25.9               | <b><u>68.1</u></b> | <b><u>25.9</u></b> | 288     | 68.6               | 25.7               | 68.1              | 25.9               | <b><u>68.1</u></b> | <b><u>25.9</u></b> |
| 631.deepsjeng_s | 288     | 189                | 7.57               | <b><u>188</u></b> | <b><u>7.63</u></b> | 187                | 7.67               | 288     | 189                | 7.57               | <b><u>188</u></b> | <b><u>7.63</u></b> | 187                | 7.67               |
| 641.leela_s     | 288     | <b><u>289</u></b>  | <b><u>5.89</u></b> | 290               | 5.89               | 289                | 5.90               | 1       | 289                | 5.91               | <b><u>288</u></b> | <b><u>5.93</u></b> | 287                | 5.94               |
| 648.exchange2_s | 288     | 90.9               | 32.3               | 90.7              | 32.4               | <b><u>90.7</u></b> | <b><u>32.4</u></b> | 288     | 90.9               | 32.3               | 90.7              | 32.4               | <b><u>90.7</u></b> | <b><u>32.4</u></b> |
| 657.xz_s        | 288     | 236                | 26.2               | 236               | 26.2               | <b><u>236</u></b>  | <b><u>26.2</u></b> | 288     | 236                | 26.2               | 236               | 26.2               | <b><u>236</u></b>  | <b><u>26.2</u></b> |

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-287"

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "288"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-287"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Jun 12 00:01:38 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Platform Notes (Continued)

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:01:38 up 15:56, 3 users, load average: 0.16, 0.03, 5.35
USER  TTY      FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1      -             Wed08   18.00s  1.04s  0.14s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6189970
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6189970
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=43
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py -b intspeerd
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101025
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 144
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: apicids
256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379,384-395,400-411,416-427,432-443
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      288
On-line CPU(s) list:         0-287
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9825 144-Core Processor
BIOS Model name:             AMD EPYC 9825 144-Core Processor
BIOS CPU family:             107
CPU family:                  26
Model:                       17
Thread(s) per core:          1
Core(s) per socket:          144
Socket(s):                   2
Stepping:                    0
Frequency boost:              enabled
CPU(s) scaling MHz:          61%

Unknown CPU @ 2.2GHz
-----
```

(Continued on next page)



SPECSpeed®2017\_int\_peak = 16.3

**Software Availability:** Oct-2024



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

```
node 0 free: 771608 MB
node 1 cpus: 144-287
node 1 size: 773896 MB
node 1 free: 773011 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

```
-----
9. /proc/meminfo
   MemTotal:      1584659504 kB
-----
```

```
-----
10. who -r
    run-level 3 Jun 11 08:09
-----
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running
-----
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
           issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
           smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
           wickedd-nanny
enabled-runtime systemd-remount-fs
disabled    autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
           chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
           firewallld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
           hwloc-dump-hwdata ipmi ipmiev d iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
           kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
           nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
           snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
           systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
           systemd-time-wait-sync systemd-timesyncd tcstd udisks2 virtinterfaced virtlockd virtlogd
           virtnetworkd virtnodedevd virtnwfilterd virtsecret virtstoraged
indirect    pcsd systemd-userdbd tftp wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=c83597cb-e37b-43a6-bd1c-58cd7f1f9316
splash=silent
mitigations=auto
quiet
security=apparmor
-----
```

```
-----
14. cpupower frequency-info
    analyzing CPU 3:
        current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.
    boost state support:
        Supported: yes
        Active: yes
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvice madvice never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 224G  9.4G  210G   5% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Cisco Systems Inc
Product:        UCSC-C245-M8SX
Product Family: Cisco UCS Rack Server
Serial:         WZP2750Z0CS

-----
21. dmidecode
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000  
1x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000  
1x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C245M8.4.3.5c.0.1202241033  
BIOS Date: 12/02/2024  
BIOS Revision: 5.35

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP  
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm  
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flt0 -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

602.gcc\_s: Same as 600.perlbench\_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9825  
2.20 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.3

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
641.leela_s: -m64 -std=c++14
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-12 00:01:38-0400.

Report generated on 2025-07-01 19:12:18 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.