



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

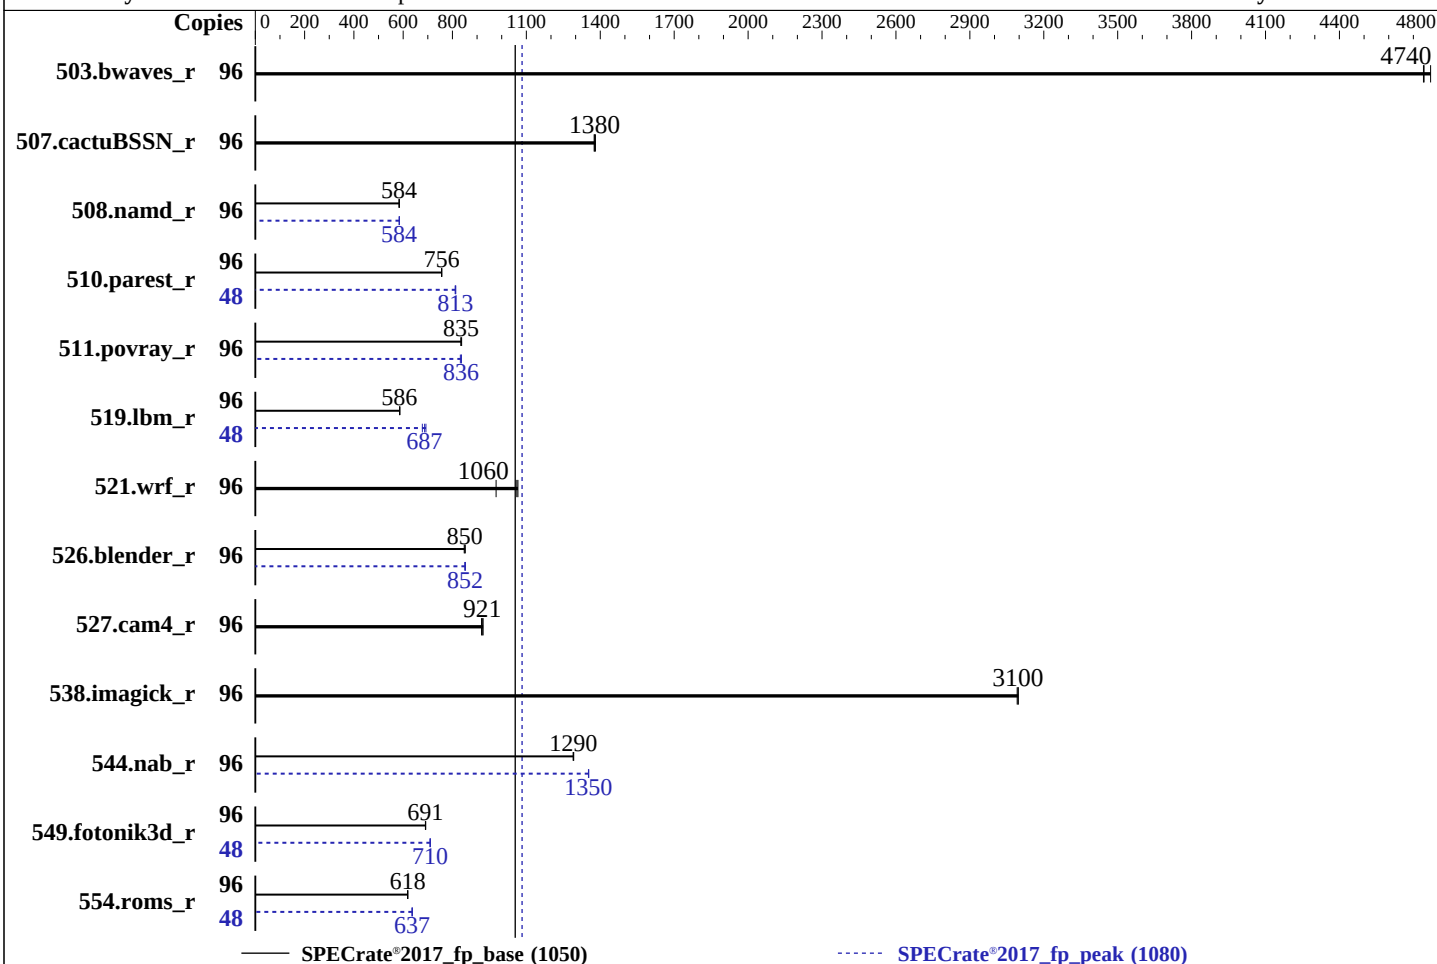

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip,
32 MB shared / 6 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 4.0 TB PCIe NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86_64)
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 0502 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance
at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	202	4770	203	4740	203	4740	96	202	4770	203	4740	203	4740
507.cactuBSSN_r	96	88.0	1380	88.4	1380	88.2	1380	96	88.0	1380	88.4	1380	88.2	1380
508.namd_r	96	156	584	156	584	156	584	96	156	585	156	584	156	584
510.parest_r	96	332	756	332	756	332	756	48	154	813	155	811	155	813
511.povray_r	96	268	835	269	835	268	837	96	269	832	268	836	268	836
519.lbm_r	96	173	586	173	585	172	587	48	73.1	692	73.6	687	74.6	678
521.wrf_r	96	203	1060	220	977	202	1070	96	203	1060	220	977	202	1070
526.blender_r	96	172	850	172	848	172	852	96	171	853	172	852	172	850
527.cam4_r	96	182	925	182	921	183	918	96	182	925	182	921	183	918
538.imagick_r	96	77.2	3090	77.1	3100	77.1	3100	96	77.2	3090	77.1	3100	77.1	3100
544.nab_r	96	125	1290	125	1290	125	1290	96	119	1350	119	1350	119	1350
549.fotonik3d_r	96	541	692	542	690	542	691	48	264	709	263	710	263	710
554.roms_r	96	247	618	247	618	246	619	48	120	637	120	637	120	636

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/aocc500A1/amd_rate_aocc500_znver5_A_lib/lib:/aocc500A1/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

Determinism Control = Manual

DRAM Scrub time = Disabled

Engine Boost = Aggressive

TDP Control = Manual

TDP = 240

PPT Control = Manual

PPT = 240

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocc500A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Sep 7 12:05:49 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. systemctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----

2. w
12:05:49 up 1 day, 18:29, 1 user, load average: 63.18, 88.16, 92.76
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              Fri17    42:28m 0.95s  0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6189724
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6189724
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.391/temlogs/preenv.fprate.391.0.log --lognum 391.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocc500A1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9255 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29
physical id 1:  core ids 0-5,8-13,16-21,24-29
physical id 0:  apicids 0-11,16-27,32-43,48-59
physical id 1:  apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:    0-95
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9255 24-Core Processor
BIOS Model name:        AMD EPYC 9255 24-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     24
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:     77%
CPU max MHz:            4315.6250
CPU min MHz:            1500.0000
BogoMIPS:               6390.23
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxext
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)

NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 192840 MB
node 0 free: 192301 MB
node 1 cpus: 6-11,54-59
node 1 size: 193532 MB
node 1 free: 192959 MB
node 2 cpus: 12-17,60-65

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 2 size: 193532 MB
node 2 free: 192982 MB
node 3 cpus: 18-23,66-71
node 3 size: 193532 MB
node 3 free: 192999 MB
node 4 cpus: 24-29,72-77
node 4 size: 193532 MB
node 4 free: 192992 MB
node 5 cpus: 30-35,78-83
node 5 size: 193494 MB
node 5 free: 193010 MB
node 6 cpus: 36-41,84-89
node 6 size: 193532 MB
node 6 free: 193026 MB
node 7 cpus: 42-47,90-95
node 7 size: 193459 MB
node 7 free: 192902 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

```
-----
9. /proc/meminfo
   MemTotal:      1584596128 kB
```

```
-----
10. who -r
    run-level 3 Sep 5 17:37
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target      Status
    multi-user          running
```

```
-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                                     issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                                     nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                                     wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                     systemd-remount-fs
disabled                             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                                     chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                                     firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                                     kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                                     serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
                                     systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
                                     systemd-timesyncd tuned udisks2 vncserver@
indirect                             systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7
splash=silent
mitigations=auto
quiet
security=apparmor
video=1024x768
```

```
-----
14. cpupower frequency-info
analyzing CPU 55:
  current policy: frequency should be within 1.50 GHz and 3.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /aocc500A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p4 xfs 2.0T 290G 1.8T 15% /

21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.
Product: RS720A-E13-RS8U
Product Family: Server
Serial: 123456789012

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
24x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0502
BIOS Date: 02/04/2025
BIOS Revision: 5.2

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

-fvec lib=AMD LIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fvec lib=AMD LIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_fp_base = 1050

SPECrate®2017_fp_peak = 1080

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-07 00:05:49-0400.

Report generated on 2025-09-23 16:56:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-09-23.