



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

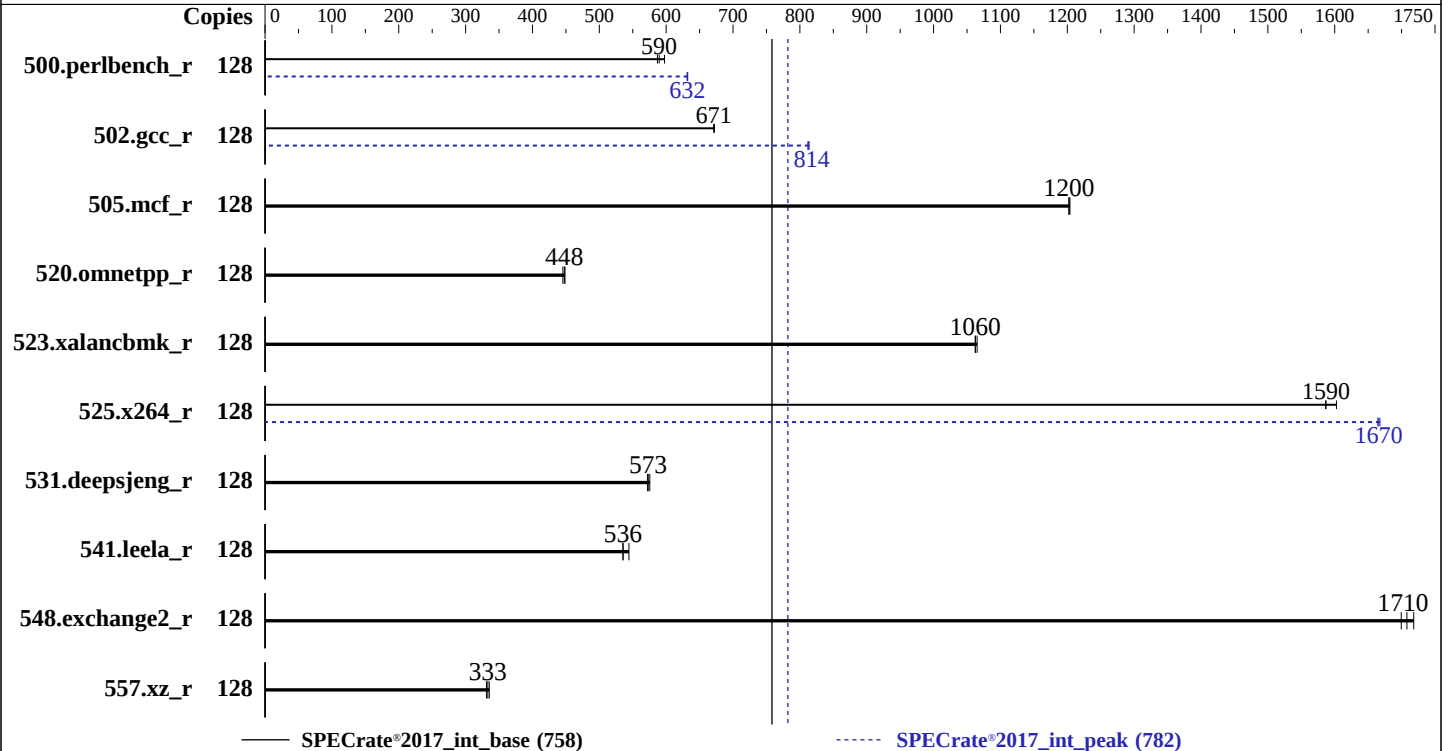

Hardware

CPU Name: Intel Xeon 6745P
Max MHz: 4300
Nominal: 3100
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 960 GB SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Version 6.0.1a released Jul-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance
at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	341	597	347	587	346	590	128	322	632	323	631	323	632
502.gcc_r	128	270	671	270	671	270	672	128	223	814	223	814	223	812
505.mcf_r	128	172	1200	172	1200	172	1200	128	172	1200	172	1200	172	1200
520.omnetpp_r	128	374	449	377	445	375	448	128	374	449	377	445	375	448
523.xalancbmk_r	128	127	1060	127	1070	127	1060	128	127	1060	127	1070	127	1060
525.x264_r	128	140	1600	141	1590	141	1590	128	135	1670	135	1660	134	1670
531.deepsjeng_r	128	256	572	255	576	256	573	128	256	572	255	576	256	573
541.leela_r	128	396	535	396	536	389	544	128	396	535	396	536	389	544
548.exchange2_r	128	196	1710	195	1720	197	1700	128	196	1710	195	1720	197	1700
557.xz_r	128	417	331	415	333	412	335	128	417	331	415	333	412	335

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
Sub NUMA clustering set to Enabled
Hardware prefetcher set to Enabled
Adjacent cache line prefetcher set to Disabled
Patrol scrub set to Disabled
XPT prefetch set to Disabled
LLC prefetch set to Enabled
Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on X210M8-SPEC Sun Sep 21 07:34:11 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-
1. uname -a
Linux X210M8-SPEC 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

-
2. w
07:34:11 up 11 min, 2 users, load average: 0.08, 0.09, 0.12

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	07:33	10.00s	1.10s	0.16s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4123808
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4123808
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

login -- root

-bash

-bash

runcpu --action=build --action validate --define default-platform-flags --define numcopies=128 -c ic2024.1-lin-sapphirerapids-rate-20240308.cfg --reportable --iterations 3 --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all intrate

runcpu --action build --action validate --define default-platform-flags --define numcopies=128 --configfile ic2024.1-lin-sapphirerapids-rate-20240308.cfg --reportable --iterations 3 --define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all --output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.069/temlogs/preenv.intrate.069.0.log --lognum 069.0 --from_runcpu 2

specperl \$SPEC/bin/sysinfo

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) 6745P
vendor_id	: GenuineIntel
cpu family	: 6
model	: 173
stepping	: 1
microcode	: 0x10003c2
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores	: 32
siblings	: 64
2 physical ids (chips)	
128 processors (hardware threads)	
physical id 0: core ids 0-15,64-79	
physical id 1: core ids 0-15,64-79	

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 0: apicids 0-31,128-159

physical id 1: apicids 256-287,384-415

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      128
On-line CPU(s) list:         0-127
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6745P
BIOS Model name:             Intel(R) Xeon(R) 6745P   CPU @ 3.1GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       173
Thread(s) per core:          2
Core(s) per socket:          32
Socket(s):                   2
Stepping:                    1
CPU(s) scaling MHz:          25%
CPU max MHz:                 4300.0000
CPU min MHz:                 800.0000
BogoMIPS:                    6200.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
                             pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
                             aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                             invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                             wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                             hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                             rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
L1d cache:                   3 MiB (64 instances)
L1i cache:                   4 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    672 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-15,64-79
NUMA node1 CPU(s):           16-31,80-95
NUMA node2 CPU(s):           32-47,96-111
NUMA node3 CPU(s):           48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257265 MB
node 0 free: 256549 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257545 MB
node 2 cpus: 32-47,96-111
node 2 size: 258039 MB
node 2 free: 257396 MB
node 3 cpus: 48-63,112-127
node 3 size: 257633 MB
node 3 free: 256959 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055721896 kB

10. who -r

run-level 3 Sep 21 07:22

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
------	------	--------	-----	-------------

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

* postfix.service loaded failed failed Postfix Mail Transport Agent

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd vncserver@
indirect	systemd-userdbd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=601b83fb-dbbc-483c-b5e6-60a9c5104a01
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=363M,high
crashkernel=72M,low

15. cpupower frequency-info

analyzing CPU 77:
current policy: frequency should be within 800 MHz and 4.30 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

vm.zone_reclaim_mode 0

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs 371G 13G 354G 4% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSX-210C-M8
Serial:      FCH2842725Z
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
  7x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
  7x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     X210M8.6.0.1a.3.0718251042
BIOS Date:        07/18/2025
BIOS Revision:    5.35
-----
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M8 (Intel Xeon 6745P 3.10 GHz processor)

SPECrate®2017_int_base = 758

SPECrate®2017_int_peak = 782

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-GNR-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-GNR-revE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-21 07:34:10-0400.

Report generated on 2025-10-07 16:40:06 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-07.