



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

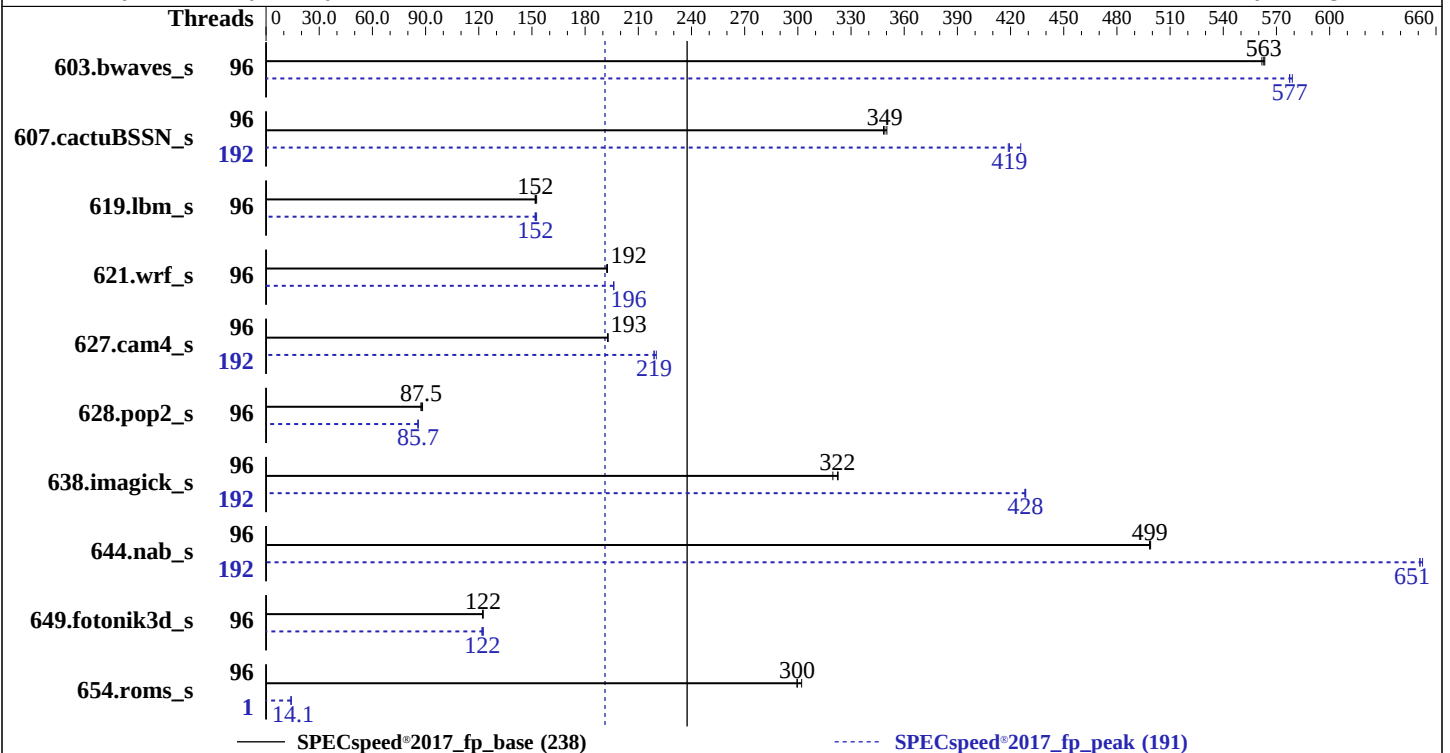

Hardware

CPU Name: AMD EPYC 9684X
Max MHz: 3700
Nominal: 2550
Enabled: 96 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 1152 MB I+D on chip per chip, 96 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1 TB NVMe
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
kernel version 6.14.0-29-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version ES312AMS.116 released Sep-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: OS and BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	105	563	105	563	105	562	96	102	579	102	577	102	577
607.cactuBSSN_s	96	47.6	350	47.9	348	47.8	349	192	39.7	419	39.2	426	39.8	419
619.lbm_s	96	34.3	153	34.5	152	34.5	152	96	34.5	152	34.3	153	34.5	152
621.wrf_s	96	68.8	192	68.7	193	68.7	192	96	67.4	196	67.5	196	67.4	196
627.cam4_s	96	45.9	193	46.0	193	46.0	193	192	40.5	219	40.5	219	40.3	220
628.pop2_s	96	134	88.3	136	87.5	136	87.5	96	138	85.7	138	85.8	139	85.7
638.imagick_s	96	44.7	322	44.7	323	45.1	320	192	33.7	428	33.7	428	33.7	429
644.nab_s	96	35.0	499	35.1	498	35.0	499	192	26.8	651	26.8	651	26.8	652
649.fotonik3d_s	96	74.5	122	74.5	122	74.6	122	96	74.9	122	74.6	122	74.4	123
654.roms_s	96	52.6	300	52.5	300	52.1	302	1	1113	14.1	1113	14.1	1115	14.1

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-191"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

cTDP: 400

Determinism Slider set to Power

ACPI SRAT L3 Cache as NUMA Domain: enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-benchmark Wed Sep 17 18:16:32 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-
1. uname -a
Linux amd-benchmark 6.14.0-29-generic #29~24.04.1-Ubuntu SMP PREEMPT_DYNAMIC Thu Aug 14 16:52:50 UTC 2
x86_64 x86_64 x86_64 GNU/Linux
-
2. w
18:16:32 up 3:14, 1 user, load average: 6.30, 5.89, 3.51
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
amd tty1 - 15:02 3:13m 1.91s 1.87s sudo su
-
3. Username
From environment variable \$USER: root
From the command 'logname': amd
-
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6190307
nofiles 1024

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/sbin/init splash
/bin/login -p --
-bash
sudo su
sudo su
su
bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9684X 96-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 2
microcode       : 0xa101248
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 96
siblings        : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-95
physical id 0:  apicids 0-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            192
On-line CPU(s) list: 0-191
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9684X 96-Core Processor
BIOS Model name:   AMD EPYC 9684X 96-Core Processor
                    2.5GHz
BIOS CPU family:   107
CPU family:        25
Model:             17
Thread(s) per core: 2
```

Unknown CPU @

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

Core(s) per socket: 96
Socket(s): 1
Stepping: 2
Frequency boost: enabled
CPU(s) scaling MHz: 102%
CPU max MHz: 2550.0000
CPU min MHz: 1500.0000
BogoMIPS: 5092.89
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d debug_swap

L1d cache: 3 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 1.1 GiB (12 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-191
Vulnerability Gather data sampling: Not affected
Vulnerability Ghostwrite: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	96M	1.1G	16	Unified	3	98304	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-191
node 0 size: 773725 MB
node 0 free: 771045 MB
node 1 cpus:
node 1 size: 774088 MB
node 1 free: 773756 MB
node distances:
node  0  1
  0:  10  32
  1:  32  10
```

9. /proc/meminfo

MemTotal: 1584961608 kB

10. who -r

run-level 3 Sep 17 15:02

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor apport avahi-daemon bluetooth cloud-config cloud-final cloud-init cloud-init-local collectd console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gnome-remote-desktop gpu-manager grub-common grub-initrd-fallback kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssl-cert sssd switcheroo-control sysstat systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	brltty console-getty debug-shell ipmievdev nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	openipmi speech-dispatcher
indirect	saned@ spice-vdagentd sssd-autofs sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot uuid
masked	alsa-utils cryptdisks cryptdisks-early hwclock saned sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-6.14.0-29-generic
root=UUID=4c4111a1-2027-4689-8cc8-4d6d365932ca
ro
quiet
splash
vt.handoff=7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 90:

current policy: frequency should be within 1.50 GHz and 2.55 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2550MHz

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS

19. Disk information

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p5	ext4	701G	7.8G	657G	2%	/home

20. /sys/devices/virtual/dmi/id

Vendor: Tyrone Systems

Product: Tyrone Camarero MDA200A3N-212

Product Family: Camarero

21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: ES312AMS.116

BIOS Date: 09/01/2025

BIOS Revision: 5.27

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt  
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100  
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Optimization Flags (Continued)

619.lbm_s (continued):

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

638.imagick_s: Same as 619.lbm_s

644.nab_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero MDA200A3N-212)
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Optimization Flags (Continued)

621.wrf_s (continued):

-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero MDA200A3N-212)

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017_fp_base = 238

SPECspeed®2017_fp_peak = 191

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Turin-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Turin-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-17 08:46:31-0400.

Report generated on 2025-12-03 14:21:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-02.