



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

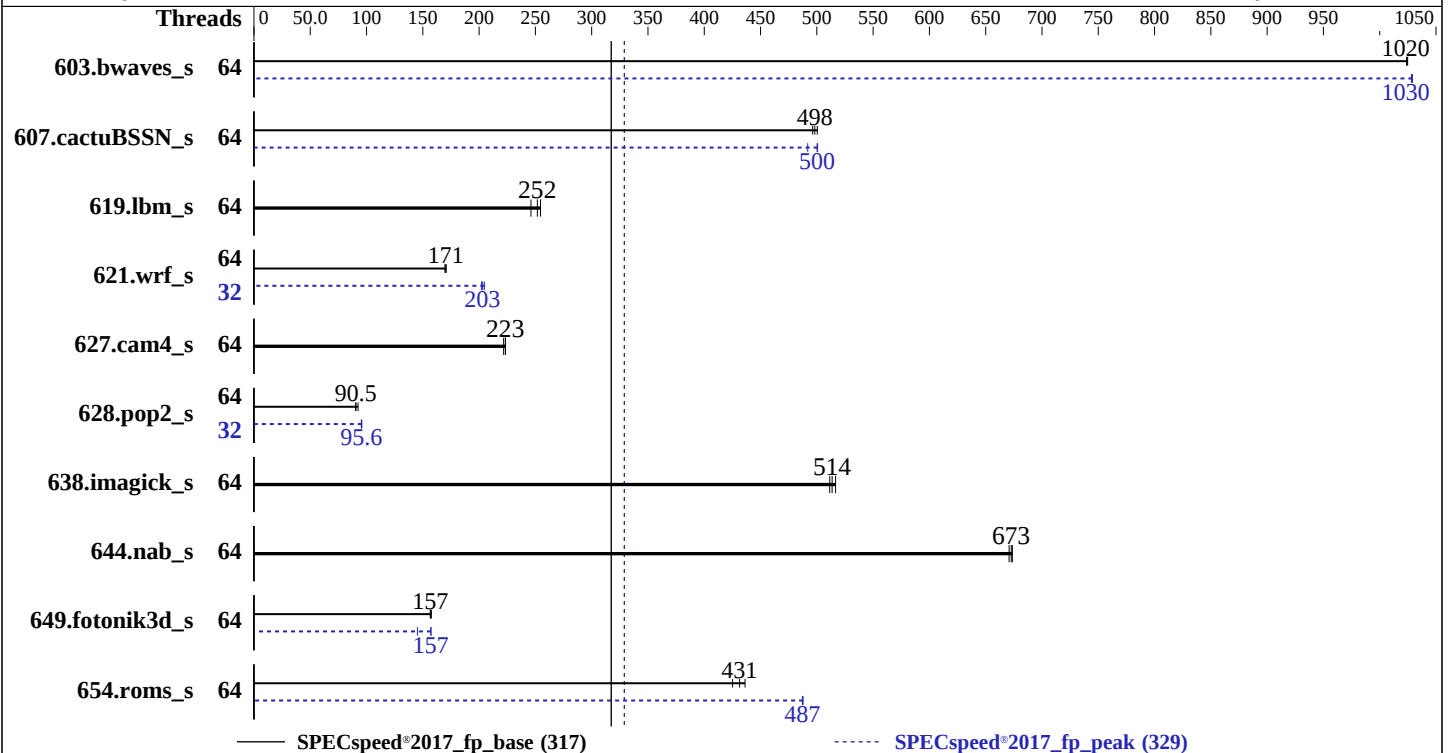

Hardware

CPU Name: AMD EPYC 9535
Max MHz: 4300
Nominal: 2400
Enabled: 64 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 3 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<u>57.6</u>	<u>1020</u>	57.6	1020	57.6	1020	64	57.4	1030	57.3	1030	<u>57.4</u>	<u>1030</u>
607.cactuBSSN_s	64	33.6	496	<u>33.5</u>	<u>498</u>	33.3	500	64	33.3	501	<u>33.3</u>	<u>500</u>	33.9	492
619.lbm_s	64	21.3	246	20.6	255	<u>20.8</u>	<u>252</u>	64	21.3	246	20.6	255	<u>20.8</u>	<u>252</u>
621.wrf_s	64	78.0	170	77.5	171	<u>77.5</u>	<u>171</u>	32	<u>65.1</u>	<u>203</u>	64.6	205	65.5	202
627.cam4_s	64	40.0	222	39.7	223	<u>39.7</u>	<u>223</u>	64	40.0	222	39.7	223	<u>39.7</u>	<u>223</u>
628.pop2_s	64	128	92.5	131	90.4	<u>131</u>	<u>90.5</u>	32	<u>124</u>	<u>95.6</u>	124	95.8	125	95.4
638.imagick_s	64	27.9	517	28.2	511	<u>28.1</u>	<u>514</u>	64	27.9	517	28.2	511	<u>28.1</u>	<u>514</u>
644.nab_s	64	26.0	671	<u>26.0</u>	<u>673</u>	25.9	674	64	26.0	671	<u>26.0</u>	<u>673</u>	25.9	674
649.fotonik3d_s	64	<u>58.1</u>	<u>157</u>	58.2	157	57.8	158	64	<u>58.0</u>	<u>157</u>	58.0	157	62.8	145
654.roms_s	64	37.0	425	36.1	436	<u>36.5</u>	<u>431</u>	64	32.3	487	<u>32.3</u>	<u>487</u>	32.3	488

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-127"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0,64,1,65,2,66,3,67,4,68,5,69,6,70,7,71,8,72,9,73,10,74,11,75,12,76,13,77,14,78,15,79"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-63"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Sep 16 03:46:57 2025

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 254 (254.27+suse.167.g130293e510)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `sysctl`
16. `/sys/kernel/mm/transparent_hugepage`
17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
18. OS release
19. Disk information
20. `/sys/devices/virtual/dmi/id`
21. `dmidecode`
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
03:46:57 up 3:00, 5 users, load average: 6.83, 6.44, 3.91
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      pts/1    10.79.30.179  00:54       2:52m      0.05s     0.05s     -bash
root      pts/2    10.79.30.179: 00:56       2:50m      0.85s     0.10s     /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094500
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

cpu time (seconds, -t) unlimited
max user processes (-u) 3094500
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups

sshd: root [priv]

sshd: root@pts/0

-bash

screen -S cpu

SCREEN -S cpu

/bin/bash

python3 ./run_intspeed.py

/bin/bash ./amd_speed_aocc500_znver5_A1.sh

runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed

runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower

--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile

\$SPEC/tmp/CPU2017.045/temlogs/preenv.fpspeed.045.0.log --lognum 045.0 --from_runcpu 2

specperl \$SPEC/bin/sysinfo

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

model name : AMD EPYC 9535 64-Core Processor

vendor_id : AuthenticAMD

cpu family : 26

model : 2

stepping : 1

microcode : 0xb002151

bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass

TLB size : 192 4K pages

cpu cores : 64

siblings : 128

1 physical ids (chips)

128 processors (hardware threads)

physical id 0: core ids 0-63

physical id 0: apicids 0-127

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9535 64-Core Processor
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	64
Socket(s):	1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	106%
CPU max MHz:	2400.0000
CPU min MHz:	1500.0000
BogoMIPS:	4799.86
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap
L1d cache:	3 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	64 MiB (64 instances)
L3 cache:	256 MiB (16 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-3,64-67
NUMA node1 CPU(s):	4-7,68-71
NUMA node2 CPU(s):	8-11,72-75
NUMA node3 CPU(s):	12-15,76-79
NUMA node4 CPU(s):	16-19,80-83
NUMA node5 CPU(s):	20-23,84-87
NUMA node6 CPU(s):	24-27,88-91
NUMA node7 CPU(s):	28-31,92-95
NUMA node8 CPU(s):	32-35,96-99
NUMA node9 CPU(s):	36-39,100-103
NUMA node10 CPU(s):	40-43,104-107
NUMA node11 CPU(s):	44-47,108-111
NUMA node12 CPU(s):	48-51,112-115
NUMA node13 CPU(s):	52-55,116-119
NUMA node14 CPU(s):	56-59,120-123
NUMA node15 CPU(s):	60-63,124-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	16M	256M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0-3,64-67
node 0 size: 48066 MB
node 0 free: 41777 MB
node 1 cpus: 4-7,68-71
node 1 size: 48381 MB
node 1 free: 48266 MB
node 2 cpus: 8-11,72-75
node 2 size: 48381 MB
node 2 free: 48242 MB
node 3 cpus: 12-15,76-79
node 3 size: 48381 MB
node 3 free: 48229 MB
node 4 cpus: 16-19,80-83
node 4 size: 48381 MB
node 4 free: 48105 MB
node 5 cpus: 20-23,84-87
node 5 size: 48381 MB
node 5 free: 48206 MB
node 6 cpus: 24-27,88-91
node 6 size: 48381 MB
node 6 free: 48189 MB
node 7 cpus: 28-31,92-95
node 7 size: 48381 MB
node 7 free: 48193 MB
node 8 cpus: 32-35,96-99
node 8 size: 48343 MB
node 8 free: 46137 MB
node 9 cpus: 36-39,100-103
node 9 size: 48381 MB
node 9 free: 48229 MB
node 10 cpus: 40-43,104-107
node 10 size: 48381 MB
node 10 free: 48135 MB
node 11 cpus: 44-47,108-111
node 11 size: 48381 MB
node 11 free: 48166 MB
node 12 cpus: 48-51,112-115
node 12 size: 48381 MB
node 12 free: 48255 MB
node 13 cpus: 52-55,116-119
node 13 size: 48381 MB
node 13 free: 48233 MB
node 14 cpus: 56-59,120-123
node 14 size: 48381 MB
node 14 free: 48182 MB
node 15 cpus: 60-63,124-127

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

node 15 size: 48283 MB

node 15 free: 48056 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12
1:	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12
2:	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12
3:	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12
4:	12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12
5:	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12
6:	12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12
7:	12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12
8:	12	12	12	12	12	12	12	10	11	11	11	11	12	12	12	12
9:	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	12
10:	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	12
11:	12	12	12	12	12	12	12	12	11	11	11	10	12	12	12	12
12:	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	11
13:	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11
14:	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11
15:	12	12	12	12	12	12	12	12	12	12	12	12	11	11	11	10

9. /proc/meminfo

MemTotal: 792223528 kB

10. who -r

run-level 5 Sep 16 00:46

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect oracle postfix purge-kernels rollback rsyslog sapconf smartd sshd systemctl-logger systemd-pstore virtqemu virtxend wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons systemd-fsck-root systemd-remount-fs
enabled-runtime	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd clamav-milter clamd clamondacc console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewallld fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid isid issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsh udisks2 update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
disabled	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

indirect xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsole
xendomains xenstored zebra
pcscd saned@ systemd-userdbd tftp uidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=31eb4e3c-f432-4a30-b618-dd595ca988cb
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 103:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	314572800
vm.dirty_background_ratio	0
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvice madvice never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme7n1p3	ext4	2.9T	20G	2.7T	1%	/

20. /sys/devices/virtual/dmi/id

Vendor: HPE

Product: HPE ProLiant Compute DL325 Gen12

Product Family: ProLiant

Serial: SANJACSCM

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200

6x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE

BIOS Version: 1.20

BIOS Date: 07/11/2025

BIOS Revision: 1.20

Firmware Revision: 1.16

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

627.cam4_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.40 GHz, AMD EPYC 9535)

SPECspeed®2017_fp_base = 317

SPECspeed®2017_fp_peak = 329

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-16 04:46:57-0400.

Report generated on 2025-11-05 12:07:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.