



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

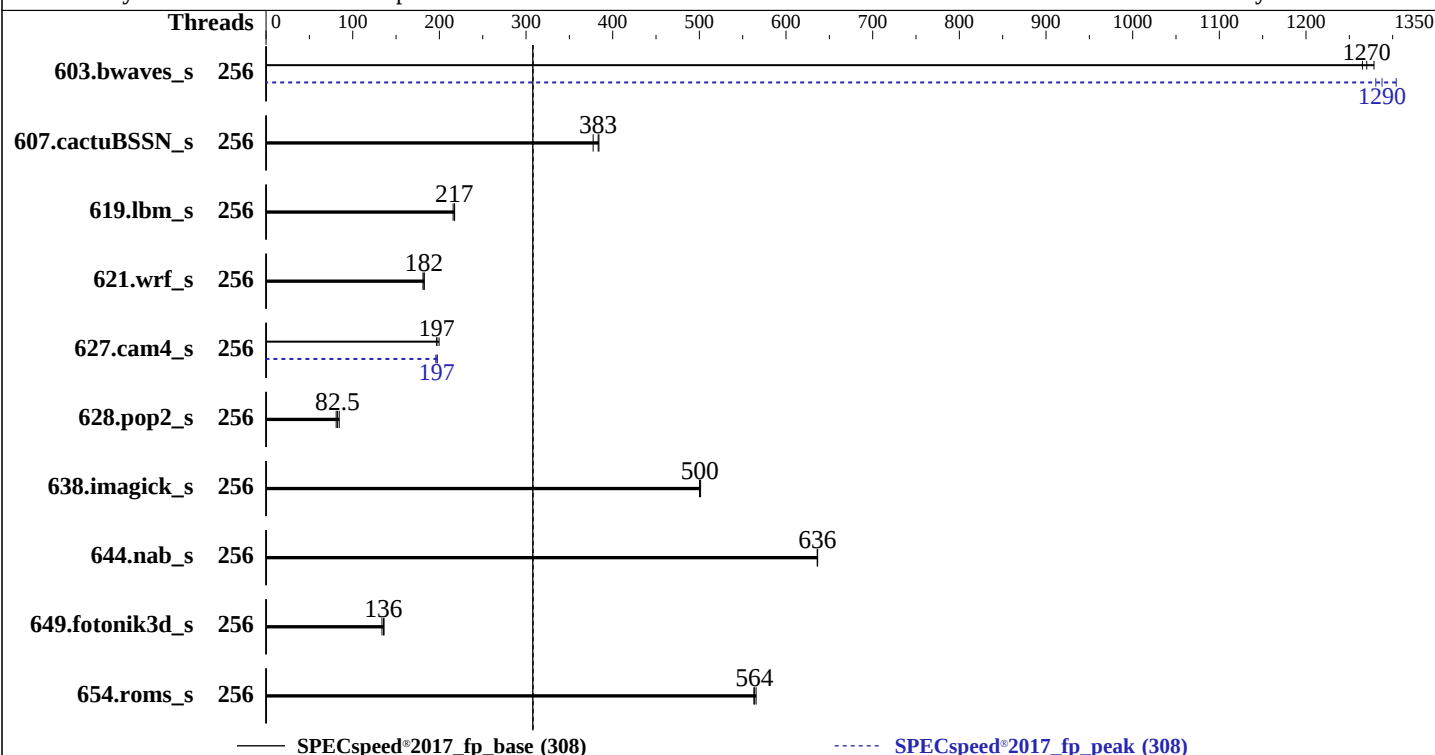

## Hardware

CPU Name: Intel Xeon 6756E  
Max MHz: 2600  
Nominal: 1800  
Enabled: 256 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per core  
L3: 96 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 1.6 TB PCIe NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Version 0603 released Jul-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Results Table

| Benchmark       | Base    |                    |                    |                    |                   |                    |                    | Peak    |                    |                    |                    |                    |         |       |
|-----------------|---------|--------------------|--------------------|--------------------|-------------------|--------------------|--------------------|---------|--------------------|--------------------|--------------------|--------------------|---------|-------|
|                 | Threads | Seconds            | Ratio              | Seconds            | Ratio             | Seconds            | Ratio              | Threads | Seconds            | Ratio              | Seconds            | Ratio              | Seconds | Ratio |
| 603.bwaves_s    | 256     | 46.6               | 1270               | 46.1               | 1280              | <b><u>46.5</u></b> | <b><u>1270</u></b> | 256     | 45.2               | 1300               | <b><u>45.8</u></b> | <b><u>1290</u></b> | 46.1    | 1280  |
| 607.cactuBSSN_s | 256     | 43.4               | 384                | <b><u>43.5</u></b> | <b><u>383</u></b> | 44.2               | 377                | 256     | 43.4               | 384                | <b><u>43.5</u></b> | <b><u>383</u></b>  | 44.2    | 377   |
| 619.lbm_s       | 256     | <b><u>24.1</u></b> | <b><u>217</u></b>  | 24.1               | 218               | 24.3               | 216                | 256     | <b><u>24.1</u></b> | <b><u>217</u></b>  | 24.1               | 218                | 24.3    | 216   |
| 621.wrf_s       | 256     | <b><u>72.5</u></b> | <b><u>182</u></b>  | 72.5               | 183               | 73.0               | 181                | 256     | <b><u>72.5</u></b> | <b><u>182</u></b>  | 72.5               | 183                | 73.0    | 181   |
| 627.cam4_s      | 256     | 44.4               | 200                | <b><u>45.0</u></b> | <b><u>197</u></b> | 45.0               | 197                | 256     | <b><u>45.0</u></b> | <b><u>197</u></b>  | 45.3               | 196                | 44.8    | 198   |
| 628.pop2_s      | 256     | <b><u>144</u></b>  | <b><u>82.5</u></b> | 147                | 80.9              | 141                | 84.4               | 256     | <b><u>144</u></b>  | <b><u>82.5</u></b> | 147                | 80.9               | 141     | 84.4  |
| 638.imagick_s   | 256     | 28.8               | 500                | <b><u>28.8</u></b> | <b><u>500</u></b> | 28.8               | 501                | 256     | 28.8               | 500                | <b><u>28.8</u></b> | <b><u>500</u></b>  | 28.8    | 501   |
| 644.nab_s       | 256     | <b><u>27.5</u></b> | <b><u>636</u></b>  | 27.5               | 636               | 27.5               | 636                | 256     | <b><u>27.5</u></b> | <b><u>636</u></b>  | 27.5               | 636                | 27.5    | 636   |
| 649.fotonik3d_s | 256     | <b><u>67.2</u></b> | <b><u>136</u></b>  | 67.0               | 136               | 68.2               | 134                | 256     | <b><u>67.2</u></b> | <b><u>136</u></b>  | 67.0               | 136                | 68.2    | 134   |
| 654.roms_s      | 256     | 27.8               | 565                | <b><u>27.9</u></b> | <b><u>564</u></b> | 28.0               | 563                | 256     | 27.8               | 565                | <b><u>27.9</u></b> | <b><u>564</u></b>  | 28.0    | 563   |

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/ic24u1/lib/intel64:/ic24u1/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes

### BIOS Configuration:

ENERGY\_PERF\_BIAS\_CFG mode = Performance

Latency Optimized Mode = Enabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

Page Policy = Adaptive

Adjacent Cache Prefetch = Disable

Sysinfo program /ic24u1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Sep 24 16:00:32 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
16:00:32 up 6:52, 2 users, load average: 161.37, 207.55, 218.63  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:08 4:51m 1.51s 0.00s /bin/bash ./speed.sh  
root tty2 - 12:11 49:20 0.04s 0.04s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

```
core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 4126132
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 4126132
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=256 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=256 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeak fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.160/temlogs/preenv.fpspeed.160.0.log --lognum 160.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u1
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6756E
vendor_id       : GenuineIntel
cpu family      : 6
model           : 175
stepping        : 3
microcode       : 0x3000362
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 128
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236
, 238, 240, 242, 244, 246, 248, 250, 252, 254
physical id 1: apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 5
64, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 61
6, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture:                       | x86_64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CPU op-mode(s):                     | 32-bit, 64-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Address sizes:                      | 52 bits physical, 48 bits virtual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Byte Order:                         | Little Endian                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| CPU(s):                             | 256                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| On-line CPU(s) list:                | 0-255                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Vendor ID:                          | GenuineIntel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| BIOS Vendor ID:                     | Intel(R) Corporation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Model name:                         | Intel(R) Xeon(R) 6756E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| BIOS Model name:                    | Intel(R) Xeon(R) 6756E CPU @ 1.8GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| BIOS CPU family:                    | 179                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CPU family:                         | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Model:                              | 175                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Thread(s) per core:                 | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Core(s) per socket:                 | 128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Socket(s):                          | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Stepping:                           | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CPU(s) scaling MHz:                 | 34%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CPU max MHz:                        | 2600.0000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| CPU min MHz:                        | 800.0000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BogoMIPS:                           | 3600.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Flags:                              | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities |
| Virtualization:                     | VT-x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| L1d cache:                          | 8 MiB (256 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| L1i cache:                          | 16 MiB (256 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| L2 cache:                           | 256 MiB (64 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| L3 cache:                           | 192 MiB (2 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| NUMA node(s):                       | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| NUMA node0 CPU(s):                  | 0-127                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| NUMA node1 CPU(s):                  | 128-255                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Vulnerability Gather data sampling: | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Vulnerability Itlb multihit:        | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Vulnerability L1tf:                 | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Vulnerability Mds:                  | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Vulnerability Meltdown:             | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 32K      | 8M       | 8    | Data        | 1     | 64     | 1        | 64             |
| L1i  | 64K      | 16M      | 8    | Instruction | 1     | 128    | 1        | 64             |
| L2   | 4M       | 256M     | 16   | Unified     | 2     | 4096   | 1        | 64             |
| L3   | 96M      | 192M     | 12   | Unified     | 3     | 131072 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-127  
node 0 size: 515574 MB  
node 0 free: 513812 MB  
node 1 cpus: 128-255  
node 1 size: 515984 MB  
node 1 free: 513632 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

9. /proc/meminfo

MemTotal: 1056317040 kB

10. who -r

run-level 3 Sep 24 09:08

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

| Default Target | Status  |
|----------------|---------|
| multi-user     | running |

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance<br>issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections<br>nvmmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore<br>wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny                                                                                                                                                                                                              |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| disabled        | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait<br>chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info<br>firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys<br>kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd<br>serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures<br>systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

indirect systemd-timesyncd tuned udisks2 vncserver@  
systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803  
splash=silent  
mitigations=auto  
quiet  
video=1024x768  
-----

-----  
14. cpupower frequency-info  
analyzing CPU 123:  
current policy: frequency should be within 800 MHz and 2.60 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
-----

-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: latency-performance  
-----

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0  
-----

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

|                      |       |
|----------------------|-------|
| max_ptes_none        | 511   |
| max_ptes_shared      | 256   |
| max_ptes_swap        | 64    |
| pages_to_scan        | 4096  |
| scan_sleep_millisecs | 10000 |

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

### 20. Disk information

SPEC is set to: /ic24u1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p8 xfs 500G 81G 420G 17% /

### 21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
Product: RS720-E12-RS8G  
Product Family: Server  
Serial: ----

### 22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0603  
BIOS Date: 07/31/2025  
BIOS Revision: 6.3

## Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsierraforest  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G  
(1.80 GHz, Intel Xeon 6756E)

SPECspeed®2017\_fp\_base = 308

SPECspeed®2017\_fp\_peak = 308

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-24 04:00:31-0400.

Report generated on 2025-11-05 12:08:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.