SPEC CPU®2017 Floating Point Rate Result

xFusion

FusionServer 1288 V8 (Intel Xeon 6766E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	6488	**Test Date:**	Feb-2026
Test Sponsor:	xFusion	**Hardware Availability:**	May-2025
Tested by:	xFusion	**Software Availability:**	Apr-2024

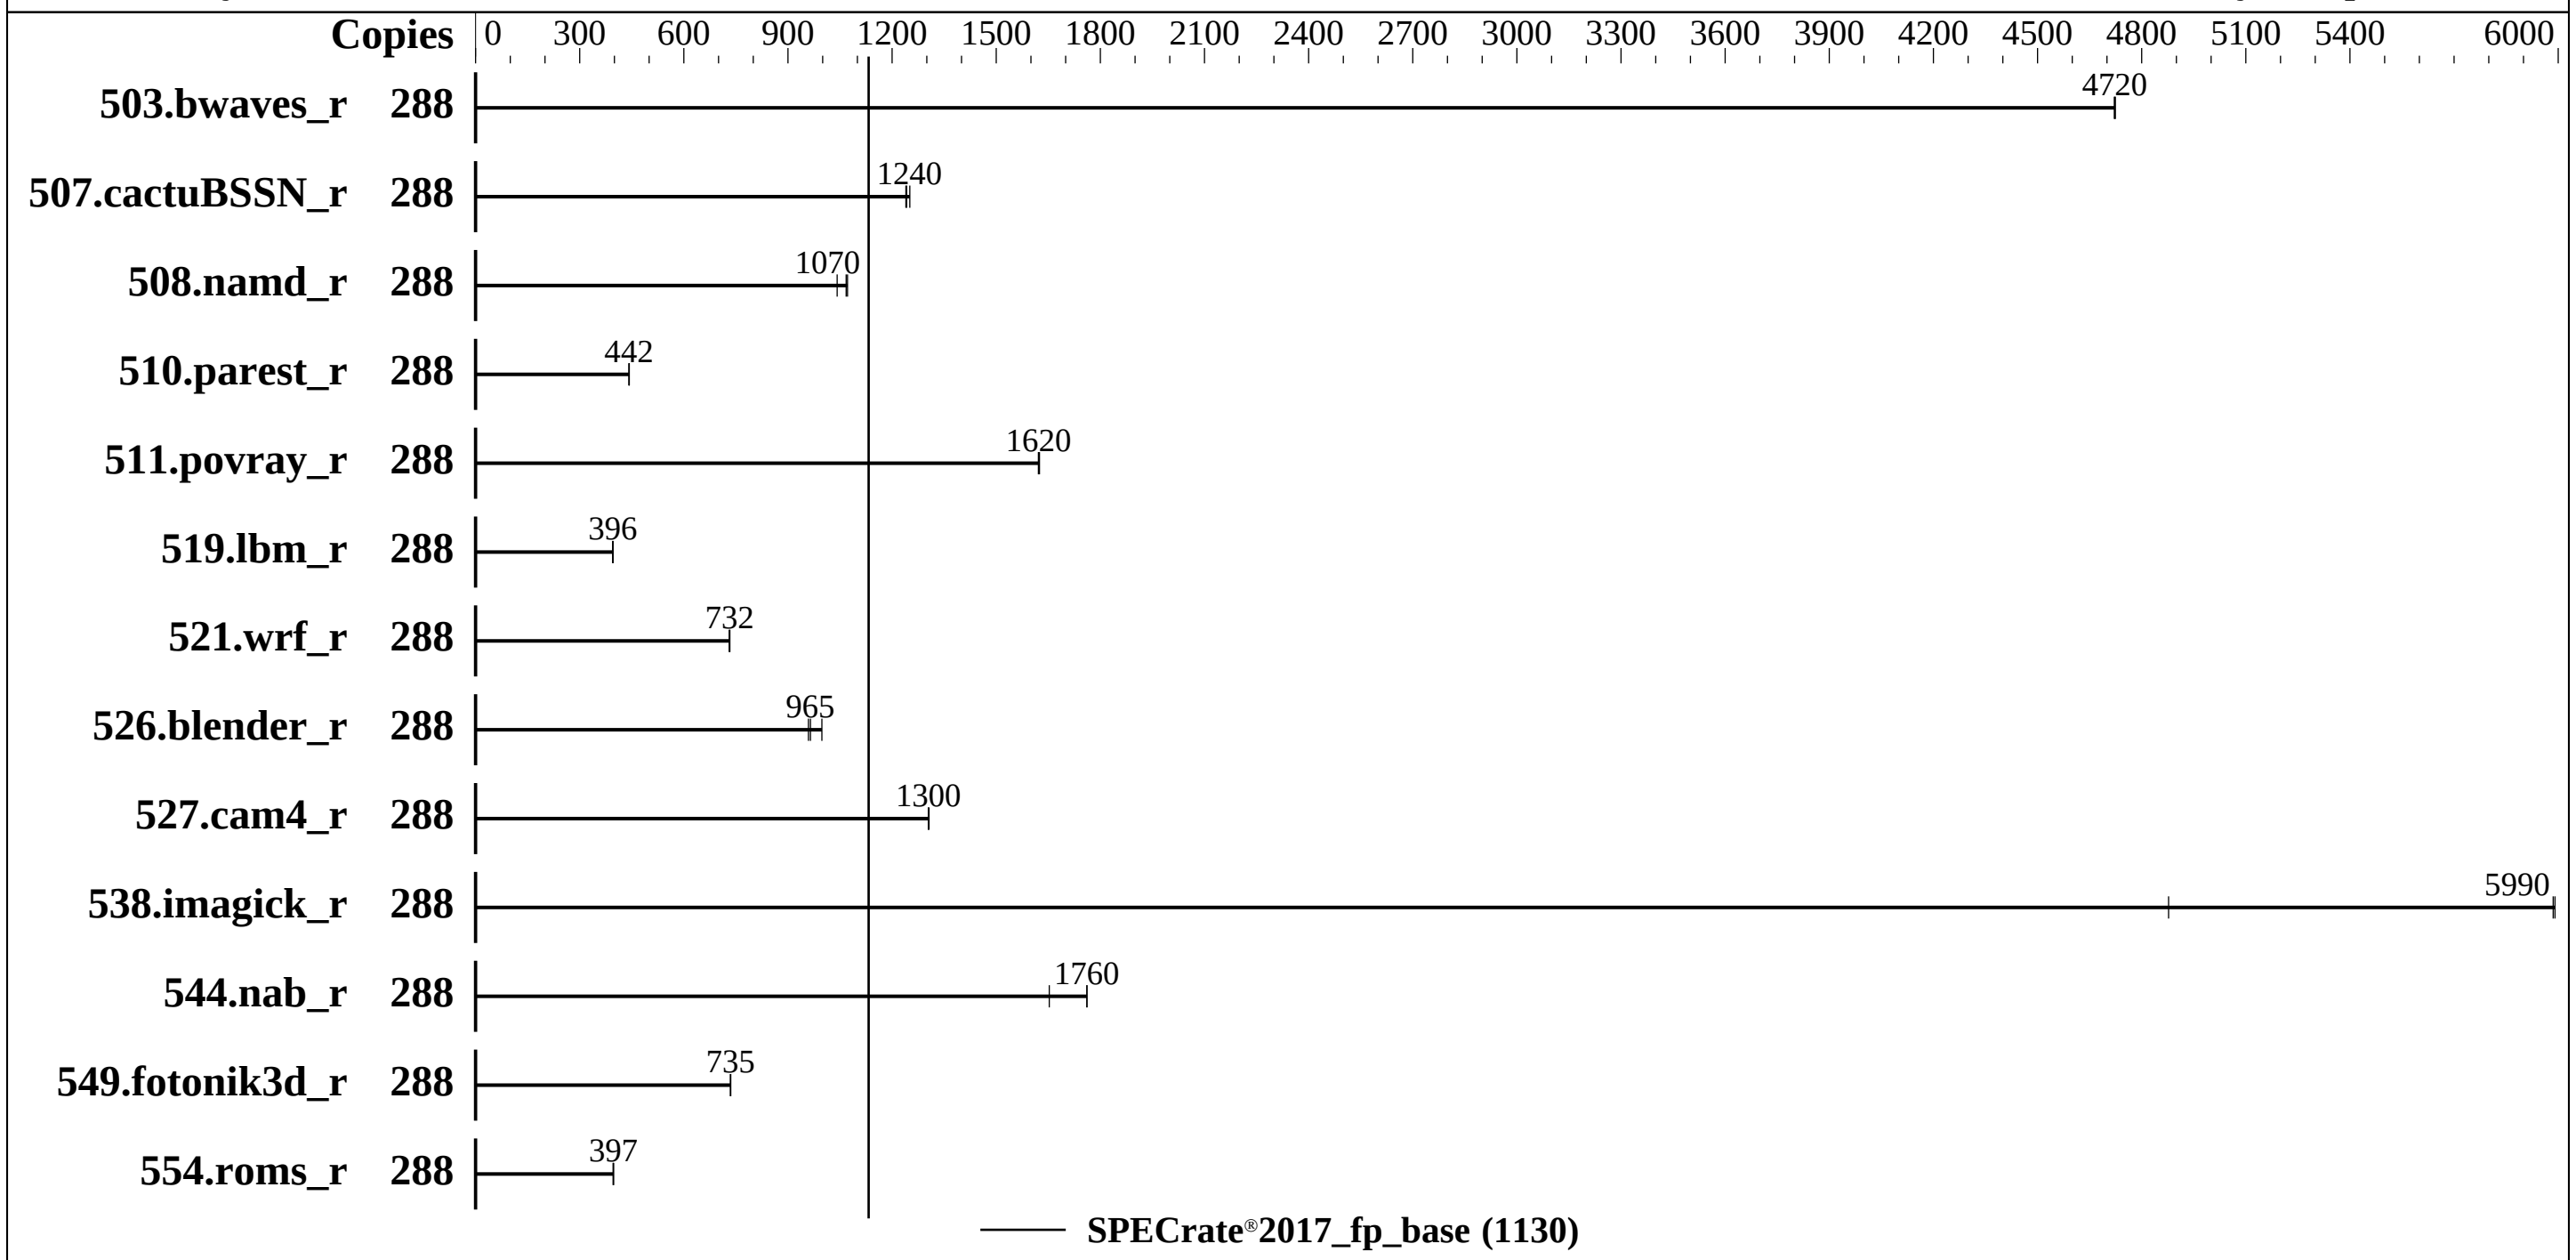

Hardware

CPU Name:	Intel Xeon 6766E
Max MHz:	2700
Nominal:	1900
Enabled:	288 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	144 MB I+D on chip per chip, 4 MB shared / 4 cores
L3:	108 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 1.92 TB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 01.31.01.19 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	612	4720	**612**	**4720**	611	4720							
507.cactuBSSN_r	288	**294**	**1240**	291	1250	294	1240							
508.namd_r	288	263	1040	255	1070	**256**	**1070**							
510.parest_r	288	1701	443	1705	442	**1704**	**442**							
511.povray_r	288	**415**	**1620**	415	1620	414	1620							
519.lbm_r	288	767	396	**767**	**396**	768	395							
521.wrf_r	288	**881**	**732**	881	733	883	731							
526.blender_r	288	457	959	**455**	**965**	440	998							
527.cam4_r	288	**386**	**1300**	386	1300	386	1310							
538.imagick_r	288	**120**	**5990**	147	4880	120	5990							
544.nab_r	288	293	1650	275	1760	**275**	**1760**							
549.fotonik3d_r	288	1527	735	**1527**	**735**	1528	734							
554.roms_r	288	1151	397	1155	396	**1152**	**397**							

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/QYL/cpu2017/lib/intel64:/home/QYL/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS configuration:
 Performance Profile Set to Performance
 Latency Optimized Mode Set to Enabled

 Sysinfo program /home/QYL/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Tue Feb 10 08:26:28 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
   2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    08:26:28 up  3:11,  1 user,  load average: 87.63, 225.43, 263.41
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      05:15    3:10m  1.63s  0.07s sh run_rate.sh
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 2059617
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 2059617
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 sh loop.sh
 sh run_rate.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
   --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/QYL/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6766E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000362
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-143
    physical id 1: core ids 0-143
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
```

(Continued on next page)

Platform Notes (Continued)

```
      ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
      32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
      4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
      ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
      physical id 1: apicids
      512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
      64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
      6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
      ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
      722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
      74,776,778,780,782,784,786,788,790,792,794,796,798
    Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

  ------------------------------------------------------------
  7. lscpu

  From lscpu from util-linux 2.37.4:
    Architecture:                    x86_64
    CPU op-mode(s):                  32-bit, 64-bit
    Address sizes:                   52 bits physical, 48 bits virtual
    Byte Order:                      Little Endian
    CPU(s):                          288
    On-line CPU(s) list:             0-287
    Vendor ID:                       GenuineIntel
    BIOS Vendor ID:                  Intel(R) Corporation
    Model name:                      Intel(R) Xeon(R) 6766E
    BIOS Model name:                 Intel(R) Xeon(R) 6766E
    CPU family:                      6
    Model:                           175
    Thread(s) per core:              1
    Core(s) per socket:              144
    Socket(s):                       2
    Stepping:                        3
    BogoMIPS:                        3800.00
    Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                     clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                     rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                     xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                     dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                                     sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                                     rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                     cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority
                                     ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                     cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
                                     xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                     split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi
                                     umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                                     cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                                     arch_lbr ibt flush_l1d arch_capabilities
    Virtualization:                  VT-x
    L1d cache:                       9 MiB (288 instances)
    L1i cache:                       18 MiB (288 instances)
    L2 cache:                        288 MiB (72 instances)
    L3 cache:                        216 MiB (2 instances)
    NUMA node(s):                    2
    NUMA node0 CPU(s):               0-143
    NUMA node1 CPU(s):               144-287
    Vulnerability Gather data sampling: Not affected
    Vulnerability Itlb multihit:     Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                       PBRSB-eIBRS Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       9M    8 Data            1     64        1             64
     L1i       64K      18M    8 Instruction     1    128        1             64
     L2         4M     288M   16 Unified         2   4096        1             64
     L3       108M     216M   12 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-143
  node 0 size: 256996 MB
  node 0 free: 255447 MB
  node 1 cpus: 144-287
  node 1 size: 257946 MB
  node 1 free: 256409 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527302408 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 10 05:14

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor
                   microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd
                   systemd-boot-update systemd-network-generator tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
                   firewalld kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
                   rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
```

(Continued on next page)

Platform Notes (Continued)

```
                 systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                 systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=UUID=7d136b45-1b14-4f69-8f42-af96fcf5aac4
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=UUID=0cfdca5d-346e-4756-a6a6-914941d0559e

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 91:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    40
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

(Continued on next page)

Platform Notes (Continued)

```
  pages_to_scan            4096
  scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release     Red Hat Enterprise Linux 9.4 (Plow)
   redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
   system-release Red Hat Enterprise Linux release 9.4 (Plow)

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /home/QYL/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   350G   34G  317G  10% /

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         XFUSION
     Product:        1288 V8
     Product Family: Birch Stream

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     3x Samsung M321R4GA3EB2-CCPPC 32 GB 2 rank 6400
     1x Samsung M321R4GA3EB2-CCPWC 32 GB 2 rank 6400
     12x Samsung M321R4GA3EB2-CCPWF 32 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       XFUSION
    BIOS Version:      01.31.01.19
    BIOS Date:         12/18/2025
    BIOS Revision:     1.19
```

Compiler Version Notes

```
==============================================================================================================
C                | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++              | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

xFusion

FusionServer 1288 V8 (Intel Xeon 6766E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488		**Test Date:**	Feb-2026
Test Sponsor:	xFusion	**Hardware Availability:**	May-2025
Tested by:	xFusion	**Software Availability:**	Apr-2024

Compiler Version Notes (Continued)

```
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.7.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.7.xml

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-09 19:26:27-0500.
Report generated on 2026-03-11 10:44:02 by CPU2017 PS formatter v6716.
Originally published on 2026-03-10.