



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081


Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

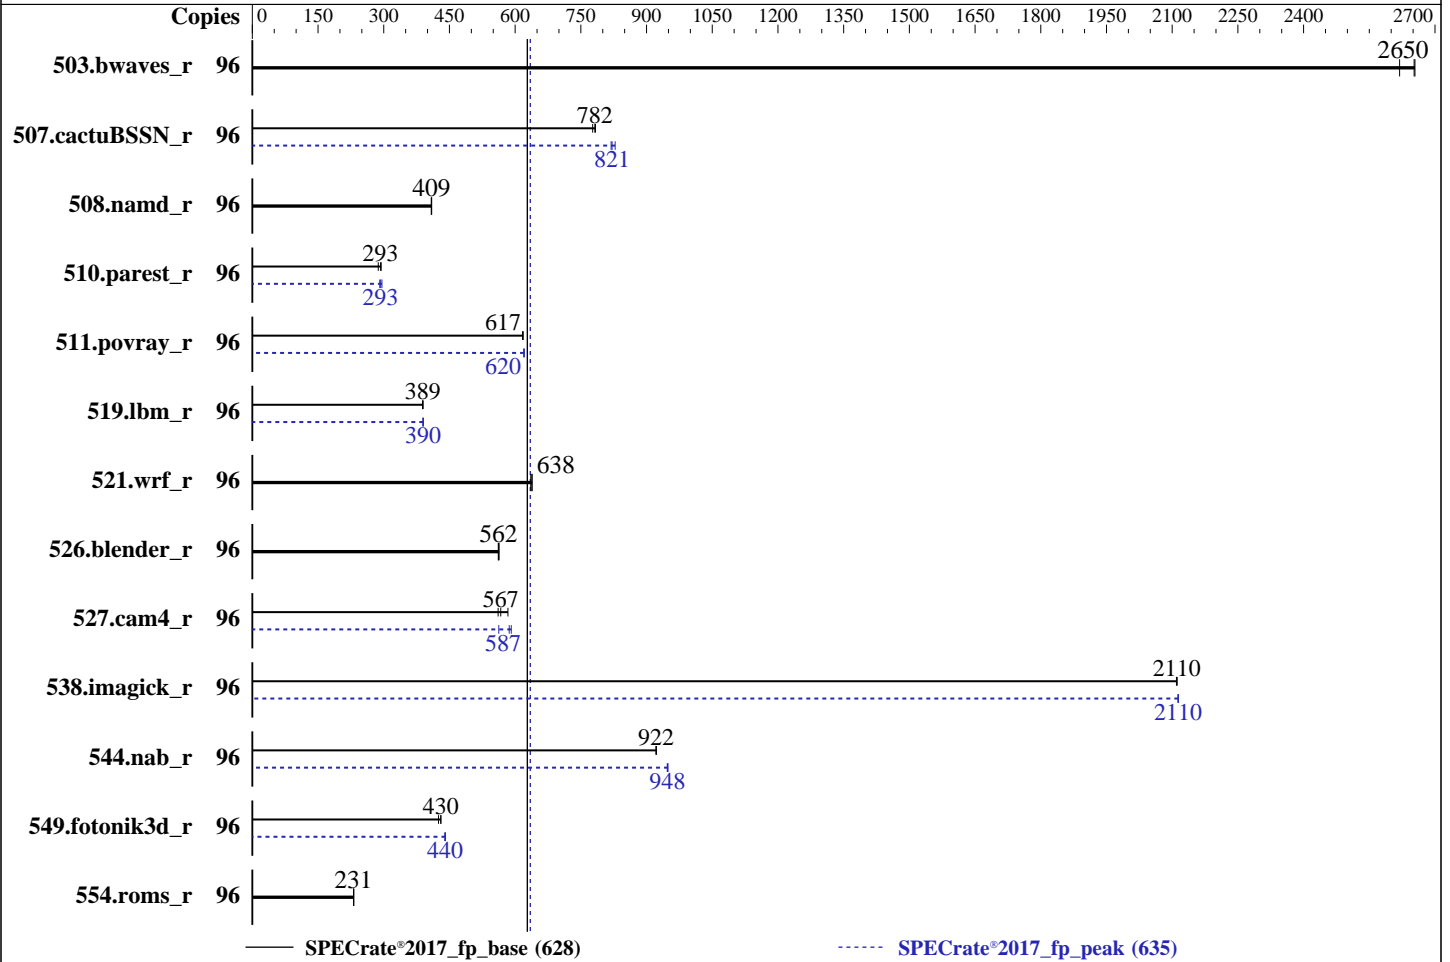

Hardware

CPU Name: AMD EPYC 9224
 Max MHz: 3700
 Nominal: 2500
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 6 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 4800)
 Storage: 1 x 1.92 TB SATA III SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-101-generic x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: BIOS Version R17_F39 released Dec-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	363	2650	368	2620	<u>363</u>	<u>2650</u>	96	363	2650	368	2620	<u>363</u>	<u>2650</u>
507.cactuBSSN_r	96	156	777	<u>155</u>	<u>782</u>	155	783	96	148	819	<u>148</u>	<u>821</u>	147	828
508.namd_r	96	223	409	<u>223</u>	<u>409</u>	223	408	96	223	409	<u>223</u>	<u>409</u>	223	408
510.parest_r	96	854	294	<u>858</u>	<u>293</u>	873	288	96	863	291	<u>857</u>	<u>293</u>	849	296
511.povray_r	96	363	617	<u>363</u>	<u>617</u>	363	618	96	361	620	362	620	<u>361</u>	<u>620</u>
519.lbm_r	96	260	390	260	389	<u>260</u>	<u>389</u>	96	259	390	260	389	<u>259</u>	<u>390</u>
521.wrf_r	96	337	639	338	636	<u>337</u>	<u>638</u>	96	337	639	338	636	<u>337</u>	<u>638</u>
526.blender_r	96	260	562	260	563	<u>260</u>	<u>562</u>	96	260	562	260	563	<u>260</u>	<u>562</u>
527.cam4_r	96	288	584	299	561	<u>296</u>	<u>567</u>	96	298	563	284	591	<u>286</u>	<u>587</u>
538.imagick_r	96	<u>113</u>	<u>2110</u>	113	2110	113	2110	96	113	2110	113	2110	<u>113</u>	<u>2110</u>
544.nab_r	96	<u>175</u>	<u>922</u>	175	922	175	922	96	170	949	<u>170</u>	<u>948</u>	171	947
549.fotonik3d_r	96	880	425	869	431	<u>870</u>	<u>430</u>	96	<u>850</u>	<u>440</u>	848	441	851	440
554.roms_r	96	<u>660</u>	<u>231</u>	659	232	660	231	96	<u>660</u>	<u>231</u>	659	232	660	231

SPECrate®2017_fp_base = **628**

SPECrate®2017_fp_peak = **635**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Bios settings:

SR-IOV Support = Enable

SVM Mode = Enable

NUMA nodes per socket = NPS4

Determinism Control = Manual

Determinism Enable = Power

TDP Control = Manual

TDP = 240

PPT Control = Manual

PPT = 240

SMT Control = Enable

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpu2017-1.1.9/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on sut Fri Mar 6 16:25:06 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux sut 6.8.0-101-generic #101-Ubuntu SMP PREEMPT_DYNAMIC Mon Feb 9 10:15:05 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
16:25:06 up 4:59, 1 user, load average: 54.21, 84.85, 91.26
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1    -              11:26       4:54m      2.69s   0.47s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   unlimited
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189757
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio            0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Platform Notes (Continued)

```
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017-1.1.9
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9224 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101158
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso tsa vmscape
TLB size      : 3584 4K pages
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0 : core ids 0-5,8-13,16-21,24-29
physical id 1 : core ids 0-5,8-13,16-21,24-29
physical id 0 : apicids 0-11,16-27,32-43,48-59
physical id 1 : apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9224 24-Core Processor
BIOS Model name:       AMD EPYC 9224 24-Core Processor Unknown CPU @ 2.5GHz
BIOS CPU family:      107
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   70%
CPU max MHz:          3707.5371
CPU min MHz:          1500.0000
BogoMIPS:              4999.78
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
ibrs_enhanced vmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid
cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt
clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cpc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pftthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vmmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
overflow_recov succor smca fsrm flush_lld debug_swap
ibpb_exit_to_user

```

Virtualization:

L1d cache: 1.5 MiB (48 instances)

L1i cache: 1.5 MiB (48 instances)

L2 cache: 48 MiB (48 instances)

L3 cache: 128 MiB (8 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-5,48-53

NUMA node1 CPU(s): 6-11,54-59

NUMA node2 CPU(s): 12-17,60-65

NUMA node3 CPU(s): 18-23,66-71

NUMA node4 CPU(s): 24-29,72-77

NUMA node5 CPU(s): 30-35,78-83

NUMA node6 CPU(s): 36-41,84-89

NUMA node7 CPU(s): 42-47,90-95

Vulnerability Gather data sampling: Not affected

Vulnerability Indirect target selection: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability Lltf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; Safe RET

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsa: Mitigation; Clear CPU buffers

Vulnerability Tsx async abort: Not affected

Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 193188 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

node 0 free: 192369 MB
node 1 cpus: 6-11,54-59
node 1 size: 193531 MB
node 1 free: 192654 MB
node 2 cpus: 12-17,60-65
node 2 size: 193531 MB
node 2 free: 192809 MB
node 3 cpus: 18-23,66-71
node 3 size: 193531 MB
node 3 free: 191954 MB
node 4 cpus: 24-29,72-77
node 4 size: 193531 MB
node 4 free: 192808 MB
node 5 cpus: 30-35,78-83
node 5 size: 193531 MB
node 5 free: 192575 MB
node 6 cpus: 36-41,84-89
node 6 size: 193531 MB
node 6 free: 192851 MB
node 7 cpus: 42-47,90-95
node 7 size: 193442 MB
node 7 free: 192736 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584968836 kB

```

```

-----
10. who -r
    run-level 5 Mar 6 11:26

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE      UNIT FILES
    enabled    apparmor appport blk-availability console-setup e2scrub_reap finalrd getty@ gpu-manager
              grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
              networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb systemd-networkd
              systemd-pstore systemd-resolved thermald ufw unattended-upgrades
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled   console-getty debug-shell ipmievd iscsid nftables numad serial-getty@ ssh
              systemd-boot-check-no-failures systemd-confext systemd-network-generator
              systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
              systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
              systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
              systemd-time-wait-sync tuned upower

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

generated      openipmi
indirect       systemd-sysupdate systemd-sysupdate-reboot
masked         cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo systemd-networkd-wait-online
                x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-101-generic
root=UUID=40338855-ed28-479d-9fce-40874beaefd7
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 32:
  current policy: frequency should be within 1.50 GHz and 2.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2500MHz

```

```

-----
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /cpu2017-1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  1.8T  145G  1.5T   9% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Giga Computing
Product:         eterio 227 RH3
Product Family: Server
Serial:          02600085

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R8GA0PB2-CCPWF 64 GB 2 rank 6400, configured at 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:     GIGABYTE
BIOS Version:    R17_F39
BIOS Date:       12/23/2025
BIOS Revision:   5.27

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
 526.blender_r: -funsigned-char -DSPEC_LP64
 527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
 -Wl,-mllvm -Wl,-reduce-array-computations=3
 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -fltto
 -fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 628

eterio 227 RH3 (2.50 GHz, AMD EPYC 9224)

SPECrate®2017_fp_peak = 635

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-06 11:25:05-0500.

Report generated on 2026-03-25 10:08:53 by CPU2017 PDF formatter v6716.

Originally published on 2026-03-24.