SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_fp_base = 506

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2025
Hardware Availability: Mar-2026
Software Availability: Jun-2025

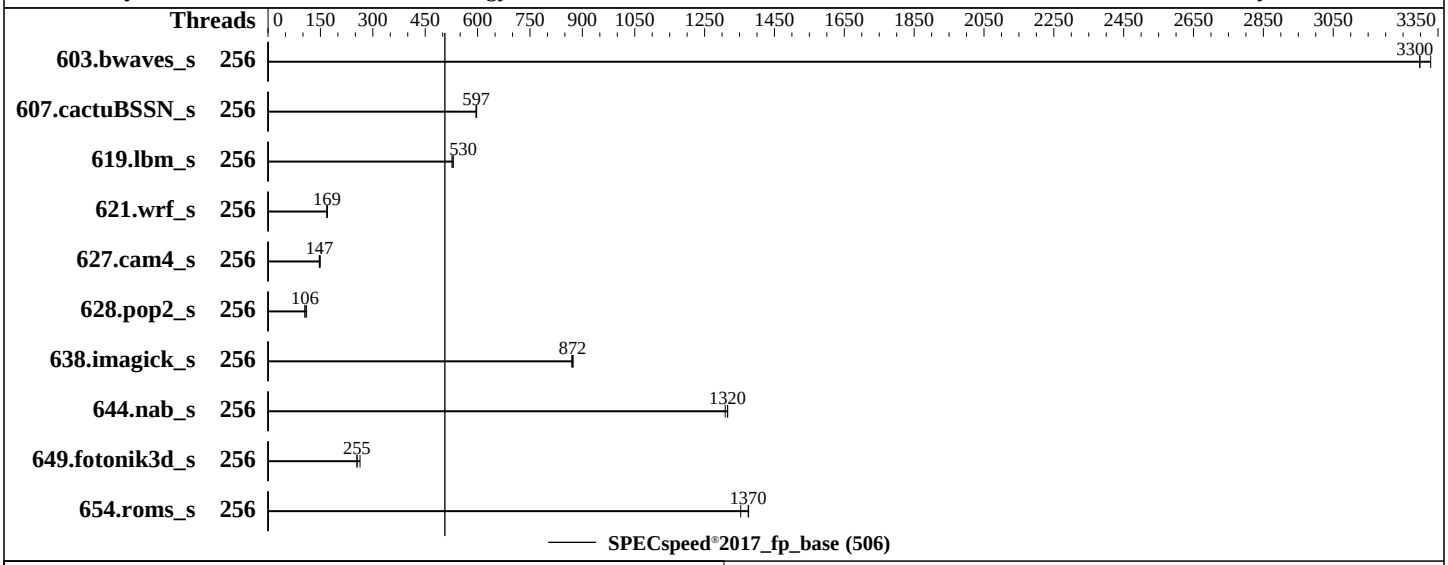

Hardware

CPU Name:	Intel Xeon 6980P
Max MHz:	3900
Nominal:	2000
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	504 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)
Storage:	1 x 1.92 TB NVME SSD
Other:	CPU Cooling: DLC

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Lenovo BIOS Version Q5E111J 1.20 released Nov-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.00 GHz, Intel Xeon 6980P)

SPECspeed®2017_fp_base = 506

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2025
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	256	17.7	3330	17.9	3300	**17.9**	**3300**							
607.cactuBSSN_s	256	27.9	597	28.0	596	**27.9**	**597**							
619.lbm_s	256	**9.89**	**530**	9.95	526	9.88	530							
621.wrf_s	256	78.7	168	77.7	170	**78.2**	**169**							
627.cam4_s	256	**60.1**	**147**	60.4	147	59.3	150							
628.pop2_s	256	**112**	**106**	108	110	113	105							
638.imagick_s	256	16.5	873	16.6	870	**16.5**	**872**							
644.nab_s	256	**13.3**	**1320**	13.3	1310	13.3	1320							
649.fotonik3d_s	256	34.6	263	**35.8**	**255**	35.8	255							
654.roms_s	256	11.4	1380	**11.5**	**1370**	11.6	1350							

SPECspeed®2017_fp_base = 506

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Workload Profile set to General Computing - Max Performance and then set it to Custom
Uncore Frequency Scaling set to Disabled
LLC Prefetch set to Enabled
Adjacent Cache Prefetch set to Disabled
SNC set to Enabled
Page Policy set to Adaptive

 Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Dec  4 09:48:01 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    09:48:01 up 12 min,  1 user,  load average: 0.00, 0.03, 0.05
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                09:47    9.00s  1.01s  0.00s /bin/bash ./run_multi_speedfp.sh

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 3093857
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3093857
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 /bin/bash ./run_multi_speedfp.sh
 /bin/bash ./run_multi_speedfp.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base --output_format all --define
   smt-on --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.108/templogs/preenv.fpspeed.108.0.log --lognum 108.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6980P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000404
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 128
    siblings        : 256
    2 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-42,64-106,128-169
    physical id 1: core ids 0-42,64-106,128-169
    physical id 0: apicids 0-85,128-213,256-339
    physical id 1: apicids 512-597,640-725,768-851
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
  Byte Order:                          Little Endian
  CPU(s):                              512
  On-line CPU(s) list:                 0-511
  Vendor ID:                           GenuineIntel
  Model name:                          Intel(R) Xeon(R) 6980P
  CPU family:                          6
  Model:                               173
  Thread(s) per core:                  2
  Core(s) per socket:                  128
  Socket(s):                           2
  Stepping:                            1
  BogoMIPS:                            4000.00
  Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                       pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                       nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                       pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                       tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                       3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                       ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                       vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                       xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                       split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                       arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                       vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                       rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                       serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                       amx_int8 flush_l1d arch_capabilities
  Virtualization:                      VT-x
  L1d cache:                           12 MiB (256 instances)
  L1i cache:                           16 MiB (256 instances)
  L2 cache:                            512 MiB (256 instances)
  L3 cache:                            1008 MiB (2 instances)
  NUMA node(s):                        6
  NUMA node0 CPU(s):                   0-42,256-298
  NUMA node1 CPU(s):                   43-85,299-341
  NUMA node2 CPU(s):                   86-127,342-383
  NUMA node3 CPU(s):                   128-170,384-426
  NUMA node4 CPU(s):                   171-213,427-469
  NUMA node5 CPU(s):                   214-255,470-511
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
```

(Continued on next page)

Platform Notes (Continued)

```
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K      12M   12 Data            1     64        1             64
      L1i       64K      16M   16 Instruction     1     64        1             64
      L2         2M     512M   16 Unified         2   2048        1             64
      L3       504M    1008M   16 Unified         3 516096        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 6 nodes (0-5)
    node 0 cpus: 0-42,256-298
    node 0 size: 128673 MB
    node 0 free: 128069 MB
    node 1 cpus: 43-85,299-341
    node 1 size: 129001 MB
    node 1 free: 127963 MB
    node 2 cpus: 86-127,342-383
    node 2 size: 128963 MB
    node 2 free: 128480 MB
    node 3 cpus: 128-170,384-426
    node 3 size: 129001 MB
    node 3 free: 128504 MB
    node 4 cpus: 171-213,427-469
    node 4 size: 129001 MB
    node 4 free: 128362 MB
    node 5 cpus: 214-255,470-511
    node 5 size: 128850 MB
    node 5 free: 128423 MB
    node distances:
    node   0   1   2   3   4   5
      0:  10  15  17  26  23  26
      1:  15  10  15  23  26  23
      2:  17  15  10  26  28  21
      3:  26  23  26  10  15  17
      4:  23  26  23  15  10  15
      5:  26  28  21  17  15  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       792055148 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Dec 4 09:37

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target  Status
    multi-user      running

  ------------------------------------------------------------
  12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                     nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                     wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    enabled-runtime  systemd-remount-fs
    disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                     chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
```

(Continued on next page)

Platform Notes (Continued)

```
                  firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                  man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                  smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
                  vncserver@
  indirect        systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=ce1519fb-457a-4b1f-ab59-fcfcc7e58c27
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 260:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

(Continued on next page)

Platform Notes (Continued)

```
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 xfs   1.8T   49G  1.7T   3% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         Lenovo ThinkSystem SC750 V4 Neptune Tray
    Product Family: ThinkSystem
    Serial:          1234567890

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    7x SK Hynix HMCG88BDJHA380N 32 GB 2 rank 8800
    4x SK Hynix HMCG88BDJHA383N 32 GB 2 rank 8800
    9x SK Hynix HMCG88BDJHA462N 32 GB 2 rank 8800
    4x SK Hynix HMCG88BDJHA464N 32 GB 2 rank 8800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      Q5E111J-1.20
   BIOS Date:         11/17/2025
   BIOS Revision:     1.20
   Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-J.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-J.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-03 20:48:00-0500.
Report generated on 2026-04-16 11:35:34 by CPU2017 PS formatter v6716.
Originally published on 2026-04-15.