



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

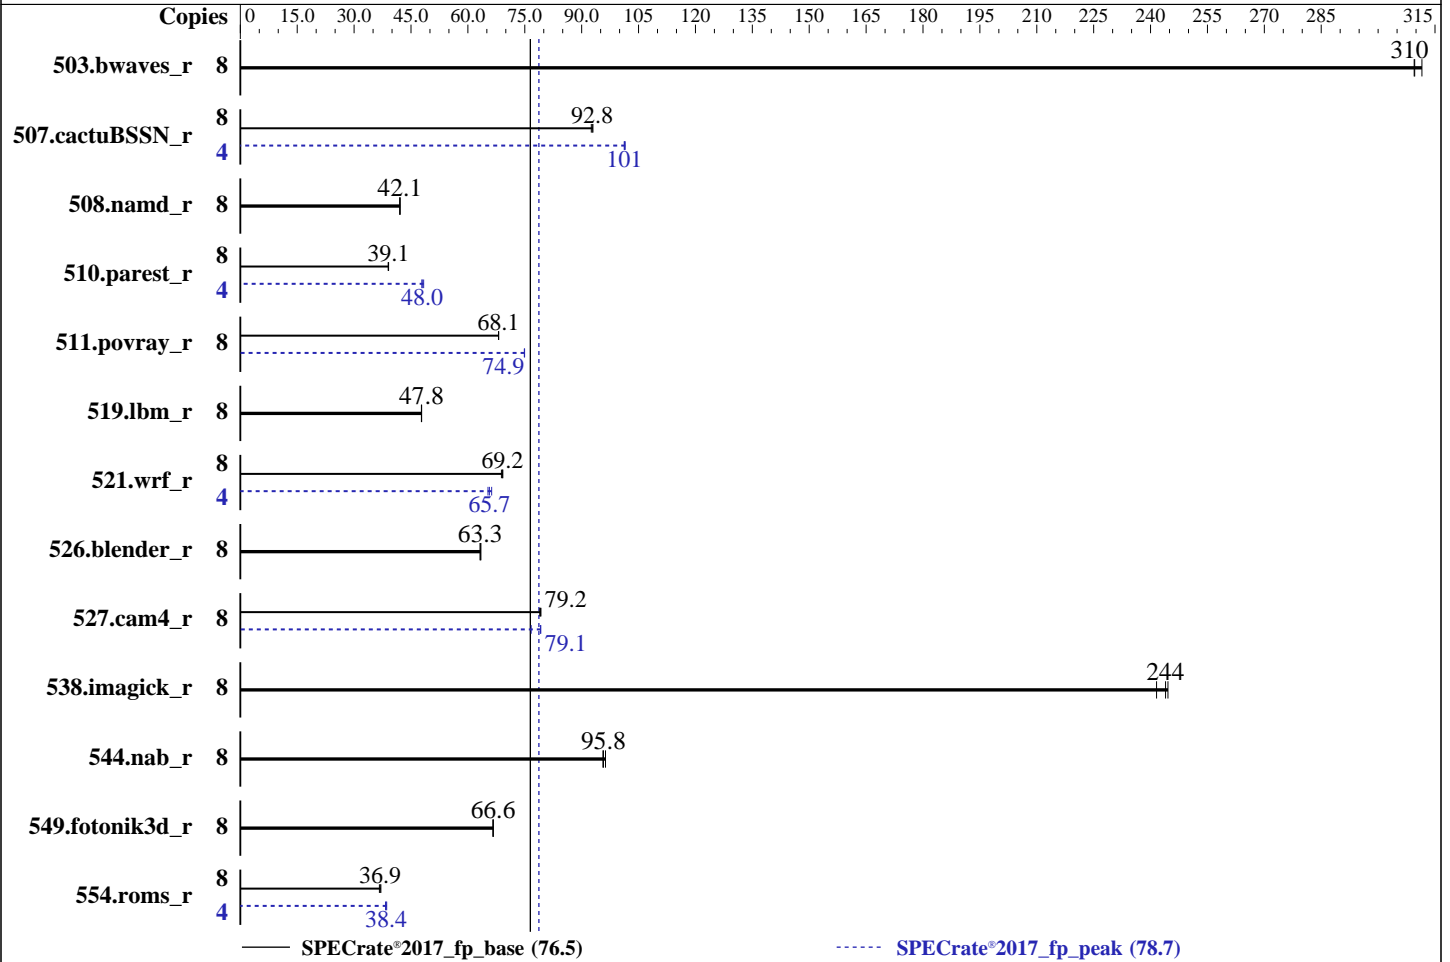

### Hardware

CPU Name: Intel Xeon 6325P  
 Max MHz: 5200  
 Nominal: 3500  
 Enabled: 4 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)  
 Storage: 1 x 1.92 TB SATA, SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 5.14.0-427.13.1.el9\_4.x86\_64  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: NEC BIOS Version U65 v2.10 12/06/2024 released Jun-2025  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jul-2025  
Hardware Availability: Jun-2025  
Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	257	312	<u>259</u>	<u>310</u>	259	310	8	257	312	<u>259</u>	<u>310</u>	259	310
507.cactuBSSN_r	8	109	93.0	<u>109</u>	<u>92.8</u>	109	92.5	4	<u>50.0</u>	<u>101</u>	49.9	101	50.0	101
508.namd_r	8	<u>181</u>	<u>42.1</u>	181	42.0	180	42.1	8	<u>181</u>	<u>42.1</u>	181	42.0	180	42.1
510.parest_r	8	537	39.0	535	39.1	<u>536</u>	<u>39.1</u>	4	<u>218</u>	<u>48.0</u>	216	48.3	219	47.9
511.povray_r	8	274	68.1	274	68.1	<u>274</u>	<u>68.1</u>	8	<u>249</u>	<u>74.9</u>	249	75.0	249	74.9
519.lbm_r	8	177	47.7	<u>177</u>	<u>47.8</u>	176	47.8	8	177	47.7	<u>177</u>	<u>47.8</u>	176	47.8
521.wrf_r	8	260	68.8	259	69.2	<u>259</u>	<u>69.2</u>	4	135	66.3	<u>136</u>	<u>65.7</u>	137	65.3
526.blender_r	8	193	63.2	192	63.4	<u>193</u>	<u>63.3</u>	8	193	63.2	192	63.4	<u>193</u>	<u>63.3</u>
527.cam4_r	8	177	79.3	177	78.9	<u>177</u>	<u>79.2</u>	8	182	76.7	177	79.2	<u>177</u>	<u>79.1</u>
538.imagick_r	8	82.4	242	<u>81.6</u>	<u>244</u>	81.3	245	8	82.4	242	<u>81.6</u>	<u>244</u>	81.3	245
544.nab_r	8	140	96.3	<u>141</u>	<u>95.8</u>	141	95.6	8	140	96.3	<u>141</u>	<u>95.8</u>	141	95.6
549.fotonik3d_r	8	<u>468</u>	<u>66.6</u>	468	66.7	468	66.6	8	<u>468</u>	<u>66.6</u>	468	66.7	468	66.6
554.roms_r	8	343	37.1	<u>345</u>	<u>36.9</u>	347	36.7	4	165	38.6	166	38.3	<u>165</u>	<u>38.4</u>

SPECrate®2017\_fp\_base = 76.5

SPECrate®2017\_fp\_peak = 78.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon 6369P CPU + 64GB RAM memory using Red Hat Enterprise Linux 9.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2025  
**Hardware Availability:** Jun-2025  
**Software Availability:** Apr-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Workload Profile set to General Throughput Compute  
Thermal configuration set to Maximum Cooling  
Enhanced Processor Performance Profile set to Enabled  
Workload Profile set to Custom  
Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Jul 3 19:46:44 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.e19\_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-427.13.1.e19\_4.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
19:46:44 up 2 min, 2 users, load average: 0.08, 0.04, 0.01  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root seat0 19:45 0.00s 0.00s 0.00s /usr/libexec/gdm-wayland-session --register-session

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2025  
**Hardware Availability:** Jun-2025  
**Software Availability:** Apr-2024

## Platform Notes (Continued)

```
gnome-session
root      tty2      19:45      2:26      0.01s     0.01s /usr/libexec/gnome-session-binary
```

3. Username  
From environment variable \$USER: root

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size             (blocks, -c) 0
data seg size              (kbytes, -d) unlimited
scheduling priority        (-e) 0
file size                  (blocks, -f) unlimited
pending signals            (-i) 254521
max locked memory          (kbytes, -l) 8192
max memory size            (kbytes, -m) unlimited
open files                 (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority         (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes         (-u) 254521
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
bash
runcpu --nobuild --action validate --flagsurl=Intel-ic2024-official-linux64.xml,Default-Platform-Flags.xml
--define numcopies=8 -c ic2024.1-lin-core-avx2-rate-20240308n.cfg --define smt-on --define cores=4
--define physicalfirst --define no-numa --define drop_caches --tune base,peak -o all --nopower --runmode
rate --tune base:peak --size refrate fprate
runcpu --nobuild --action validate --flagsurl Intel-ic2024-official-linux64.xml,Default-Platform-Flags.xml
--define numcopies=8 --configfile ic2024.1-lin-core-avx2-rate-20240308n.cfg --define smt-on --define
cores=4 --define physicalfirst --define no-numa --define drop_caches --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate --nopower --runmode rate --tune base:peak --size
refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.022/templogs/preenv.fprate.022.0.log
--lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6325P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x12c
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 4
siblings       : 8
1 physical ids (chips)
8 processors (hardware threads)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2025  
**Hardware Availability:** Jun-2025  
**Software Availability:** Apr-2024

## Platform Notes (Continued)

physical id 0: core ids 0-3  
physical id 0: apicids 0-7

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                8
On-line CPU(s) list:   0-7
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6325P
BIOS Model name:       Intel(R) Xeon(R) 6325P
CPU family:            6
Model:                183
Thread(s) per core:    2
Core(s) per socket:    4
Socket(s):             1
Stepping:              1
BogoMIPS:              6988.80
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                      rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                      xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                      dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                      sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp
                      ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                      clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                      avx_vnni dtherm ida arat pln pts hfi vnmi umip pku ospke waitpkg gfni
                      vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize
                      pconfig arch_lbr ibt flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             192 KiB (4 instances)
L1i cache:             128 KiB (4 instances)
L2 cache:              8 MiB (4 instances)
L3 cache:              12 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-7
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                      PBRSE-eIBRS SW sequence
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jul-2025  
Hardware Availability: Jun-2025  
Software Availability: Apr-2024

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	192K	12	Data	1	64	1	64
L1i	32K	128K	8	Instruction	1	64	1	64
L2	2M	8M	16	Unified	2	2048	1	64
L3	12M	12M	6	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0-7  
node 0 size: 63690 MB  
node 0 free: 62256 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo

MemTotal: 65218744 kB

10. who -r

run-level 5 Jul 3 19:44

11. Systemd service manager version: systemd 252 (252-32.el9\_4)

Default Target Status  
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION  
\* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon ahslog amsd atd auditd avahi-daemon bluetooth chronyd cpqFca cpqIde cpqScsi crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode mr_cpqScsi multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rshmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smad smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-fsck-root systemd-remount-fs
disabled	amsd_rev arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty cpqFca_rev cpqIde_rev cpqScsi_rev cpqiScsi cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server gssproxy iprdump iprinit iprupdate ipsec iscsi-init iscsid iscsiui kpatch kvm_stat ledmon lldpad man-db-restart-cache-update mr_cpqScsi_rev netavark-dhcp-proxy netavark-firewalld-reload nfs-blkmap nfs-server nftables nmb nvme-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

### Platform Notes (Continued)

```

indirect
rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smad_rev smb
snmpd snmptrapd spamassassin speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysextr target targetclid tog-pegasus
vsftpd wpa_supplicant
iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot vsftpd@

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 3:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2025  
**Hardware Availability:** Jun-2025  
**Software Availability:** Apr-2024

## Platform Notes (Continued)

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap           64
   pages_to_scan          4096
   scan_sleep_millisecs   10000
-----
```

```
-----
20. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.4 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
   system-release  Red Hat Enterprise Linux release 9.4 (Plow)
-----
```

```
-----
21. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-root ext4  1.8T  68G  1.6T   5% /
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
   Vendor:      NEC
   Product:     Express5800/R110m-1
   Product Family: Express5800
   Serial:      SGH404JTQ8
-----
```

```
-----
23. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M324R4GA3DB0-CWMOL 32 GB 2 rank 5600, configured at 4400
-----
```

```
-----
24. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      NEC
   BIOS Version:     2.10
   BIOS Date:        12/06/2024
   BIOS Revision:    2.10
   Firmware Revision: 1.68
-----
```

## Compiler Version Notes

```
-----
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 76.5

### Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2025  
**Hardware Availability:** Jun-2025  
**Software Availability:** Apr-2024

## Compiler Version Notes (Continued)

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
 527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
 -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
 -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jul-2025  
Hardware Availability: Jun-2025  
Software Availability: Apr-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 76.5

Express5800/R110m-1 (Intel Xeon 6325P)

SPECrate®2017\_fp\_peak = 78.7

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R110m-1-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R110m-1-RevF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-03 06:46:43-0400.

Report generated on 2026-04-14 10:01:48 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-13.