



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12


(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

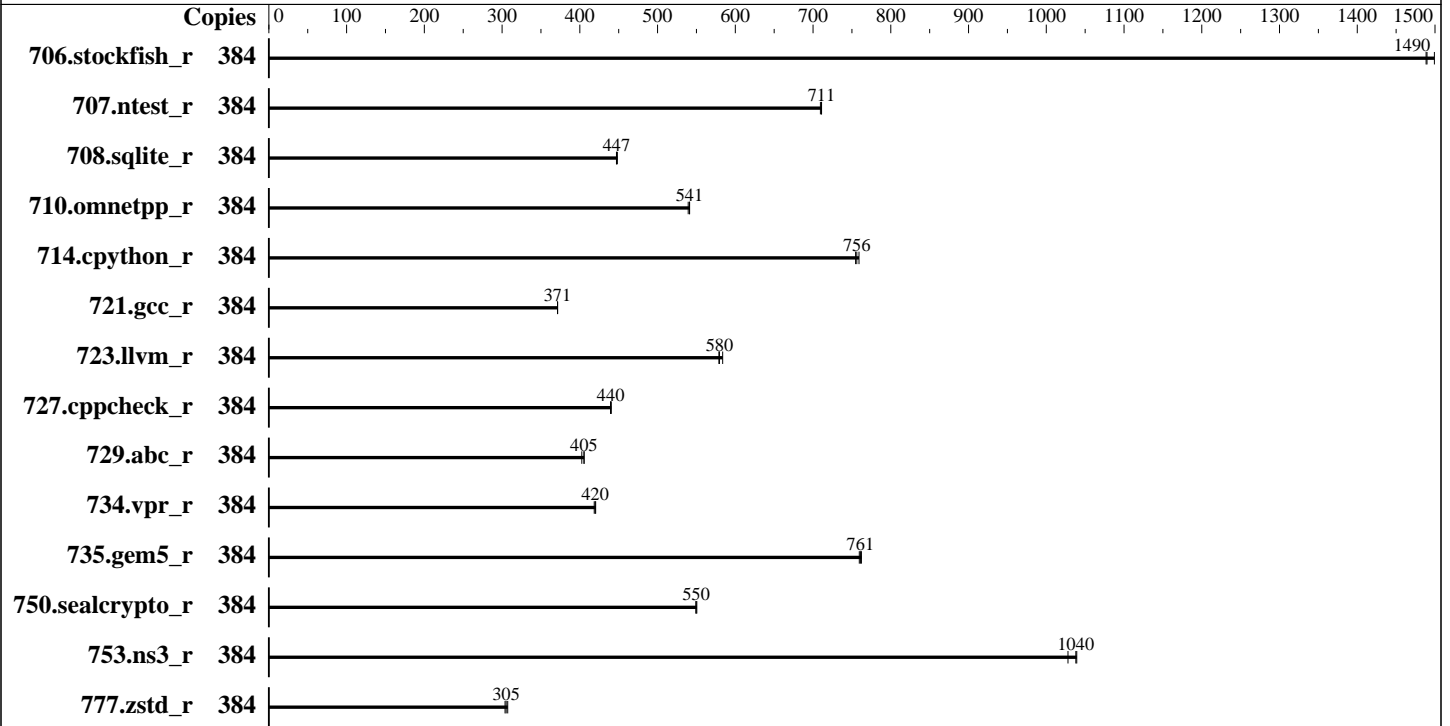

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 192 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip,
 32 MB shared / 16 cores
 Other: None
 Memory: 1536 GB (12 x 128 GB 2Rx4 PC5-6400B-R,
 running at 5200)
 Storage: 1 x 1.6 TB NVMe SSD
 Cooling: CLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v1.34
 released Nov-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the
 cost of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	384	323	1500	325	1490	325	1490	384	323	1500	325	1490	325	1490
707.ntest_r	384	320	711	320	709	320	711	384	320	711	320	709	320	711
708.sqlite_r	384	453	447	452	448	453	447	384	453	447	452	448	453	447
710.omnetpp_r	384	345	541	346	539	345	541	384	345	541	346	539	345	541
714.cpython_r	384	244	755	242	759	243	756	384	244	755	242	759	243	756
721.gcc_r	384	710	371	710	371	709	371	384	710	371	710	371	709	371
723.llvm_r	384	336	580	334	584	336	579	384	336	580	334	584	336	579
727.cppcheck_r	384	314	439	313	440	313	440	384	314	439	313	440	313	440
729.abc_r	384	435	405	438	403	435	405	384	435	405	438	403	435	405
734.vpr_r	384	422	420	421	420	423	419	384	422	420	421	420	423	419
735.gem5_r	384	245	762	246	759	246	761	384	245	762	246	759	246	761
750.sealcrypto_r	384	375	550	374	550	375	549	384	375	550	374	550	375	549
753.ns3_r	384	227	1040	229	1030	227	1040	384	227	1040	229	1030	227	1040
777.zstd_r	384	805	307	814	304	810	305	384	805	307	814	304	810	305

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
 To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 LD_LIBRARY_PATH =
 "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_
 aocc510_znver5_A_lib/lib32:"
 MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
 Memory using Ubuntu 24.04
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
 Workload Profile set to High Performance Compute (HPC)
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 ACPI CST C2 Latency set to 18 microseconds
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 Thermal Configuration set to Maximum Cooling
 AMD Periodic Directory Rinse set to Periodic
 Workload Profile set to Custom
 Power Regulator set to OS Control Mode

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

sysinfo program /home/cpu2026/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Thu Jan 29 13:03:47 2026

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

2. w
13:03:47 up 1 min, 4 users, load average: 0.34, 0.11, 0.04
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
admin1 172.16.0.111 13:03 1:20 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 13:03 1:20 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 13:03 1:20 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 13:03 1:20 0.00s 0.01s sshd: admin1 [priv]

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

3. Username

From environment variable \$USER: root
From the command 'logname': admin1

4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                6190288
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@notty
/bin/bash $SPEC/run_intrrate_sh.sh
sudo ./run_intrrate.py
python3 ./run_intrrate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/tempslogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model         : 17
stepping      : 0
microcode     : 0xb101054
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
cpu cores      : 192
siblings      : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       384
On-line CPU(s) list:         0-383
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9965 192-Core Processor
BIOS Model name:             AMD EPYC 9965 192-Core Processor      CPU @ 2.2GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        17
Thread(s) per core:          2
Core(s) per socket:          192
Socket(s):                    1
Stepping:                     0
Frequency boost:              enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                  2250.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4492.81
```

```
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llid debug_swap

Virtualization:	AMD-V
L1d cache:	9 MiB (192 instances)
L1i cache:	6 MiB (192 instances)
L2 cache:	192 MiB (192 instances)
L3 cache:	384 MiB (12 instances)
NUMA node(s):	12
NUMA node0 CPU(s):	0-15,192-207
NUMA node1 CPU(s):	16-31,208-223
NUMA node2 CPU(s):	32-47,224-239
NUMA node3 CPU(s):	48-63,240-255
NUMA node4 CPU(s):	64-79,256-271
NUMA node5 CPU(s):	80-95,272-287
NUMA node6 CPU(s):	96-111,288-303
NUMA node7 CPU(s):	112-127,304-319
NUMA node8 CPU(s):	128-143,320-335
NUMA node9 CPU(s):	144-159,336-351
NUMA node10 CPU(s):	160-175,352-367
NUMA node11 CPU(s):	176-191,368-383
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Vulnerability Vmscape:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

L2	1M	192M	16 Unified	2	1024	1	64
L3	32M	384M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 12 nodes (0-11)
node 0 cpus: 0-15,192-207
node 0 size: 128633 MB
node 0 free: 128243 MB
node 1 cpus: 16-31,208-223
node 1 size: 128969 MB
node 1 free: 128655 MB
node 2 cpus: 32-47,224-239
node 2 size: 129013 MB
node 2 free: 128758 MB
node 3 cpus: 48-63,240-255
node 3 size: 129013 MB
node 3 free: 128221 MB
node 4 cpus: 64-79,256-271
node 4 size: 129013 MB
node 4 free: 128743 MB
node 5 cpus: 80-95,272-287
node 5 size: 129013 MB
node 5 free: 128660 MB
node 6 cpus: 96-111,288-303
node 6 size: 129013 MB
node 6 free: 128672 MB
node 7 cpus: 112-127,304-319
node 7 size: 129013 MB
node 7 free: 128700 MB
node 8 cpus: 128-143,320-335
node 8 size: 129013 MB
node 8 free: 128705 MB
node 9 cpus: 144-159,336-351
node 9 size: 129013 MB
node 9 free: 128689 MB
node 10 cpus: 160-175,352-367
node 10 size: 129013 MB
node 10 free: 128654 MB
node 11 cpus: 176-191,368-383
node 11 size: 128931 MB
node 11 free: 128532 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
0:   10 11 11 12 12 12 12 12 12 12 12 12
1:   11 10 11 12 12 12 12 12 12 12 12 12

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

2:	11	11	10	12	12	12	12	12	12	12	12	12
3:	12	12	12	10	11	11	12	12	12	12	12	12
4:	12	12	12	11	10	11	12	12	12	12	12	12
5:	12	12	12	11	11	10	12	12	12	12	12	12
6:	12	12	12	12	12	12	10	11	11	12	12	12
7:	12	12	12	12	12	12	11	10	11	12	12	12
8:	12	12	12	12	12	12	11	11	10	12	12	12
9:	12	12	12	12	12	12	12	12	12	10	11	11
10:	12	12	12	12	12	12	12	12	12	11	10	11
11:	12	12	12	12	12	12	12	12	12	11	11	10

 9. /proc/meminfo
 MemTotal: 1584795624 kB

 10. who -r
 run-level 5 Jan 29 13:02

 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
 Default Target Status
 graphical running

 12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextr systemd-time-wait-sync systemd-timesyncd upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

 13. Linux kernel boot-time arguments, from /proc/cmdline
 BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
root=UUID=23e3b8c8-72f7-4e93-a794-3e98f6ff544b
ro
```

14. cpupower frequency-info

analyzing CPU 278:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2250MHz

15. tuned-adm active

Current active profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

```
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0nlp2 ext4 1.5T 82G 1.3T 6% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant
Serial: SANJACSCM
```

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
2x Samsung M321RAJA0MB2-CCPEC 128 GB 2 rank 6400, configured at 5200
10x Samsung M321RAJA0MB2-CCPKC 128 GB 2 rank 6400, configured at 5200
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 1.34
BIOS Date: 11/28/2025
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

BIOS Revision: 1.34
Firmware Revision: 1.18

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
753.ns3_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Benchmarks using both C and C++:
clang++ clang



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Base Portability Flags

706.stockfish_r: -DSPEC_LP64
707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
```

(Continued on next page)



SPEC CPU[®]2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECrate[®]2026_int_base = 573

SPECrate[®]2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-fvisibility=hidden -lamdlibm -lflang -lamdalloc

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: basepeak = yes

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: basepeak = yes

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 573

SPECrate®2026_int_peak = 573

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-01-29 08:03:46-0500.

Report generated on 2026-05-11 16:37:51 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.