



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

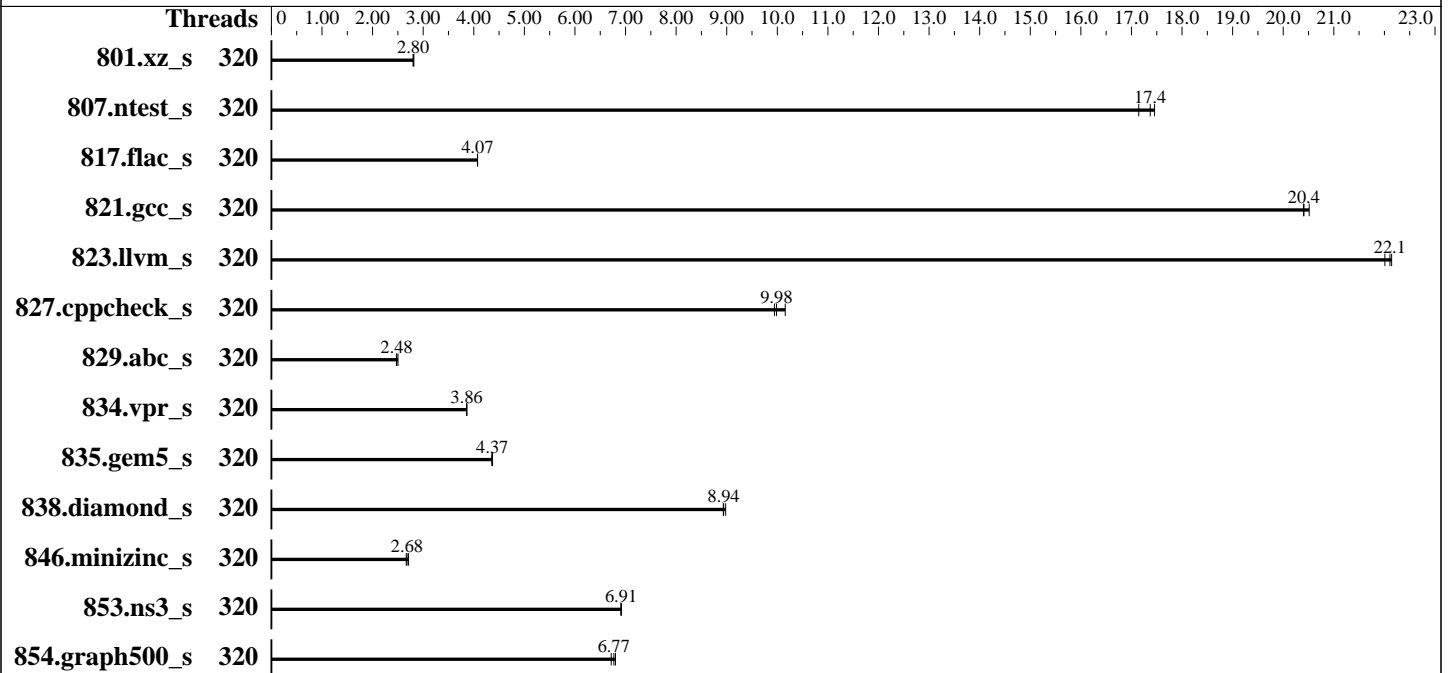

Hardware

CPU Name: AMD EPYC 9845
 Max MHz: 3700
 Nominal: 2100
 Enabled: 160 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip,
 32 MB shared / 16 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: CLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-94-generic
 Compiler: C/C++: Version 5.1.0 of AOCC
 Fortran: Flang v22
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v2.90
 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|---------|-------------|-------------|-------------|-------------|------------|-------------|---------|-------------|-------------|-------------|-------------|------------|-------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 801.xz_s | 320 | 210 | 2.82 | <u>211</u> | <u>2.80</u> | 211 | 2.80 | 320 | 210 | 2.82 | <u>211</u> | <u>2.80</u> | 211 | 2.80 |
| 807.ntest_s | 320 | 65.3 | 17.5 | <u>65.6</u> | <u>17.4</u> | 66.5 | 17.1 | 320 | 65.3 | 17.5 | <u>65.6</u> | <u>17.4</u> | 66.5 | 17.1 |
| 817.flac_s | 320 | <u>426</u> | <u>4.07</u> | 427 | 4.07 | 426 | 4.08 | 320 | <u>426</u> | <u>4.07</u> | 427 | 4.07 | 426 | 4.08 |
| 821.gcc_s | 320 | 101 | 20.5 | 101 | 20.4 | <u>101</u> | <u>20.4</u> | 320 | 101 | 20.5 | 101 | 20.4 | <u>101</u> | <u>20.4</u> |
| 823.llvm_s | 320 | <u>63.8</u> | <u>22.1</u> | 63.7 | 22.1 | 64.1 | 22.0 | 320 | <u>63.8</u> | <u>22.1</u> | 63.7 | 22.1 | 64.1 | 22.0 |
| 827.cppcheck_s | 320 | <u>112</u> | <u>9.98</u> | 110 | 10.2 | 113 | 9.94 | 320 | <u>112</u> | <u>9.98</u> | 110 | 10.2 | 113 | 9.94 |
| 829.abc_s | 320 | 336 | 2.47 | <u>335</u> | <u>2.48</u> | 332 | 2.50 | 320 | 336 | 2.47 | <u>335</u> | <u>2.48</u> | 332 | 2.50 |
| 834.vpr_s | 320 | 247 | 3.86 | 247 | 3.86 | <u>247</u> | <u>3.86</u> | 320 | 247 | 3.86 | 247 | 3.86 | <u>247</u> | <u>3.86</u> |
| 835.gem5_s | 320 | <u>261</u> | <u>4.37</u> | 261 | 4.36 | 261 | 4.37 | 320 | <u>261</u> | <u>4.37</u> | 261 | 4.36 | 261 | 4.37 |
| 838.diamond_s | 320 | <u>112</u> | <u>8.94</u> | 111 | 8.98 | 112 | 8.93 | 320 | <u>112</u> | <u>8.94</u> | 111 | 8.98 | 112 | 8.93 |
| 846.minizinc_s | 320 | <u>250</u> | <u>2.68</u> | 247 | 2.71 | 251 | 2.67 | 320 | <u>250</u> | <u>2.68</u> | 247 | 2.71 | 251 | 2.67 |
| 853.ns3_s | 320 | <u>167</u> | <u>6.91</u> | 167 | 6.92 | 167 | 6.91 | 320 | <u>167</u> | <u>6.91</u> | 167 | 6.92 | 167 | 6.91 |
| 854.graph500_s | 320 | <u>90.3</u> | <u>6.77</u> | 89.8 | 6.80 | 91.0 | 6.72 | 320 | <u>90.3</u> | <u>6.77</u> | 89.8 | 6.80 | 91.0 | 6.72 |

SPECspeed®2026_int_base = **6.56**

SPECspeed®2026_int_peak = **6.56**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>
Flang v22 is available at <https://flang.llvm.org/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Operating System Notes (Continued)

'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-319"
LD_LIBRARY_PATH =
"/home/cpu2026/amd_speed_aocc510_flang22_znver5_A_lib/lib:/home/cpu2026/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"

General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
Last-Level Cache (LLC) as NUMA Node set to Enabled
ACPI CST C2 Latency set to 18 microseconds
Thermal Configuration set to Maximum Cooling
NUMA memory domains per socket set to Two memory domains per socket
Workload Profile set to Custom
Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2026/bin/sysinfo

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Tue Nov 25 18:19:30 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -srvm
Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86_64

2. w
18:19:30 up 3 min, 1 user, load average: 0.00, 0.00, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
admin1 172.16.0.100 18:17 2:59 0.00s 0.02s sshd: admin1 [priv]

3. Username
From environment variable \$USER: root
From the command 'logname': admin1

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

-----
4. ulimit -a
   time(seconds)          unlimited
   file(blocks)           unlimited
   data(kbytes)           unlimited
   stack(kbytes)          unlimited
   coredump(blocks)       0
   memory(kbytes)         unlimited
   locked memory(kbytes)  2097152
   process                 3093820
   nofiles                 1024
   vmemory(kbytes)        unlimited
   locks                   unlimited
   rtprio                  0

-----
5. sysinfo process ancestry
   /sbin/init
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: admin1 [priv]
   sshd: admin1@pts/0
   -bash
   sudo ./run_intspeed.py
   sudo ./run_intspeed.py
   python3 ./run_intspeed.py
   /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
   runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 intspeed
   runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
     --nopower --runmode speed --tune base --size test:train:refspeed intspeed --nopreenv --note-preenv
     --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2026

-----
6. /proc/cpuinfo
   model name      : AMD EPYC 9845 160-Core Processor
   vendor_id       : AuthenticAMD
   cpu family      : 26
   model           : 17
   stepping        : 0
   microcode       : 0xb101054
   bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size        : 192 4K pages
   cpu cores       : 160
   siblings        : 320
   1 physical ids (chips)

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

320 processors (hardware threads)

physical id 0: core ids 0-159

physical id 0: apicids 0-319

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       320
On-line CPU(s) list:         0-319
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9845 160-Core Processor
BIOS Model name:             AMD EPYC 9845 160-Core Processor      CPU @ 2.1GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        17
Thread(s) per core:          2
Core(s) per socket:          160
Socket(s):                    1
Stepping:                     0
Frequency boost:              enabled
CPU(s) scaling MHz:          102%
CPU max MHz:                  2100.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4193.72

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                               rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                               extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                               sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                               cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                               oswb ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                               perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                               ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                               smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                               avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt
                               xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                               cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                               xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                               svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fstrm avx512_vp2intersect
flush_llid debug_swap
```

```
Virtualization: AMD-V
L1d cache: 7.5 MiB (160 instances)
L1i cache: 5 MiB (160 instances)
L2 cache: 160 MiB (160 instances)
L3 cache: 320 MiB (10 instances)
NUMA node(s): 10
NUMA node0 CPU(s): 0-15,160-175
NUMA node1 CPU(s): 16-31,176-191
NUMA node2 CPU(s): 32-47,192-207
NUMA node3 CPU(s): 48-63,208-223
NUMA node4 CPU(s): 64-79,224-239
NUMA node5 CPU(s): 80-95,240-255
NUMA node6 CPU(s): 96-111,256-271
NUMA node7 CPU(s): 112-127,272-287
NUMA node8 CPU(s): 128-143,288-303
NUMA node9 CPU(s): 144-159,304-319
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected
```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 7.5M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 5M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 160M | 16 | Unified | 2 | 1024 | 1 | 64 |
| L3 | 32M | 320M | 16 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 10 nodes (0-9)
node 0 cpus: 0-15,160-175
node 0 size: 77024 MB
node 0 free: 76343 MB
node 1 cpus: 16-31,176-191
node 1 size: 77403 MB
node 1 free: 77112 MB
node 2 cpus: 32-47,192-207
node 2 size: 77357 MB
node 2 free: 77137 MB
node 3 cpus: 48-63,208-223
node 3 size: 77405 MB
node 3 free: 77065 MB
node 4 cpus: 64-79,224-239
node 4 size: 77405 MB
node 4 free: 77156 MB
node 5 cpus: 80-95,240-255
node 5 size: 77405 MB
node 5 free: 77150 MB
node 6 cpus: 96-111,256-271
node 6 size: 77405 MB
node 6 free: 77156 MB
node 7 cpus: 112-127,272-287
node 7 size: 77403 MB
node 7 free: 76560 MB
node 8 cpus: 128-143,288-303
node 8 size: 77403 MB
node 8 free: 77159 MB
node 9 cpus: 144-159,304-319
node 9 size: 77324 MB
node 9 free: 76791 MB

```

```

node distances:
node  0  1  2  3  4  5  6  7  8  9
0:  10 11 11 11 11 12 12 12 12 12
1:  11 10 11 11 11 12 12 12 12 12
2:  11 11 10 11 11 12 12 12 12 12
3:  11 11 11 10 11 12 12 12 12 12
4:  11 11 11 11 10 12 12 12 12 12
5:  12 12 12 12 12 10 11 11 11 11
6:  12 12 12 12 12 11 10 11 11 11
7:  12 12 12 12 12 11 11 10 11 11
8:  12 12 12 12 12 11 11 11 10 11
9:  12 12 12 12 12 11 11 11 11 10

```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

MemTotal: 792099900 kB

10. who -r
run-level 5 Nov 25 18:16

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync systemd-timesyncd upower
indirect systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-94-generic
root=UUID=c8895b10-3344-47fb-81a4-2b6fb85bbd20
ro

14. cpupower frequency-info
analyzing CPU 313:
current policy: frequency should be within 1.50 GHz and 2.10 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

Total States: 3
Pstate-P0: 2100MHz

15. tuned-adm active
Current active profile: balanced

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0nlp2 ext4  438G   93G  323G  23% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor:          HPE
Product:         ProLiant DL325 Gen11
Product Family: ProLiant
Serial:          DL325G11-008
```

22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
1x Micron MTC40F2046S1RC64BD2 MWWF 64 GB 2 rank 6400
11x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     2.90
BIOS Date:        01/09/2026
BIOS Revision:    2.90
Firmware Revision: 1.70
```

Compiler Version Notes

```
=====  
C      | 854.graph500_s(base)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Compiler Version Notes (Continued)

=====
C++ | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
| 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
| 846.minizinc_s(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Base Portability Flags (Continued)

835.gem5_s: -fno-finite-math-only -DSPEC_LP64

838.diamond_s: -DSPEC_LP64

846.minizinc_s: -DSPEC_LP64

853.ns3_s: -fno-finite-math-only -DSPEC_LP64

854.graph500_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Base Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-return-type

Peak Optimization Flags

C benchmarks:

854.graph500_s: basepeak = yes

C++ benchmarks:

807.ntest_s: basepeak = yes

827.cppcheck_s: basepeak = yes

853.ns3_s: basepeak = yes

Benchmarks using both C and C++:

801.xz_s: basepeak = yes

817.flac_s: basepeak = yes

821.gcc_s: basepeak = yes

823.llvm_s: basepeak = yes

829.abc_s: basepeak = yes

834.vpr_s: basepeak = yes

835.gem5_s: basepeak = yes

838.diamond_s: basepeak = yes

846.minizinc_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026_int_base = 6.56

SPECspeed®2026_int_peak = 6.56

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2025-11-25 13:19:29-0500.

Report generated on 2026-05-04 23:33:38 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.