



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017


Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

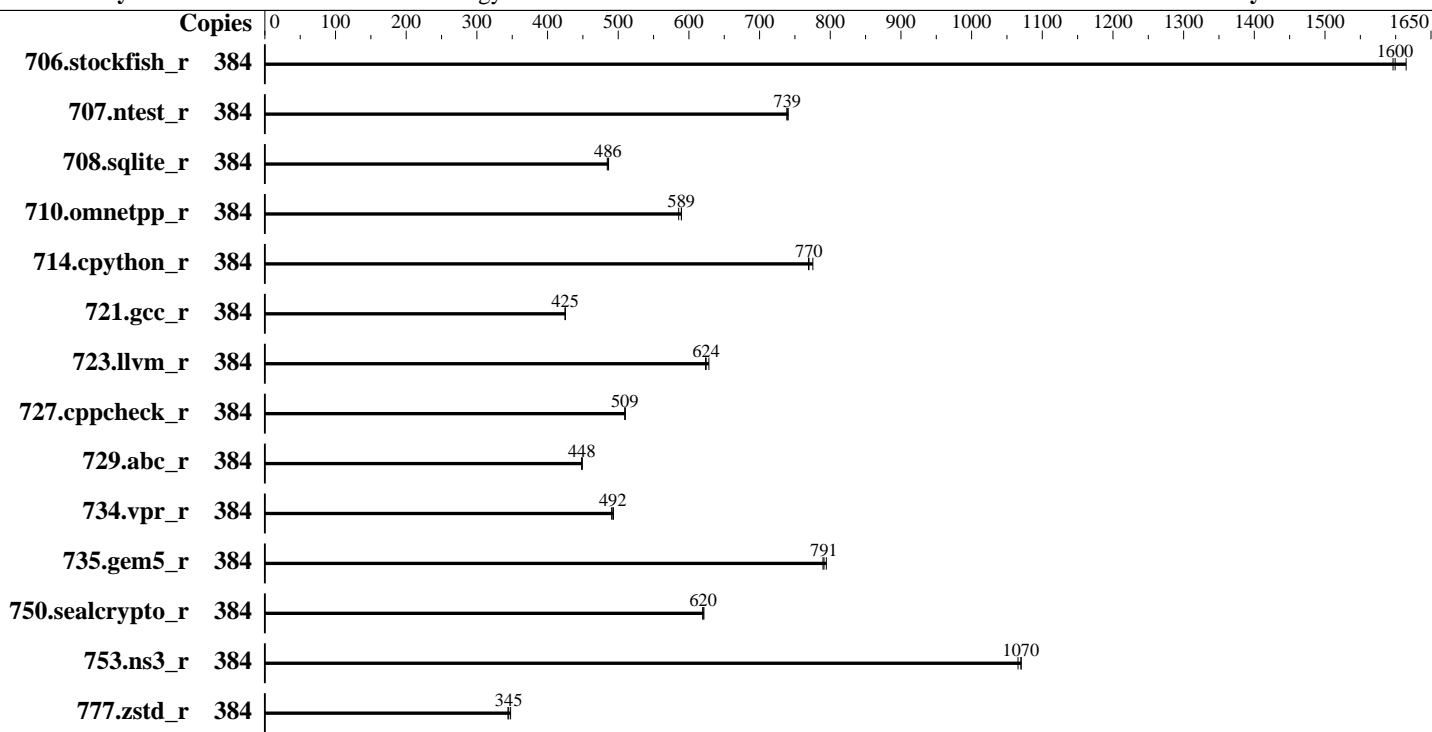

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 192 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip,
 32 MB shared / 16 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 960 GB M.2 NVME SSD
 Cooling: Air
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: Lenovo BIOS Version GPE123F 5.40 released Nov-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 626

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	384	303	1600	300	1610	303	1600	384	303	1600	300	1610	303	1600
707.ntest_r	384	307	741	308	739	308	739	384	307	741	308	739	308	739
708.sqlite_r	384	417	486	419	484	418	486	384	417	486	419	484	418	486
710.omnetpp_r	384	317	589	317	590	319	586	384	317	589	317	590	319	586
714.cpython_r	384	237	775	239	770	239	769	384	237	775	239	770	239	769
721.gcc_r	384	620	425	620	425	620	425	384	620	425	620	425	620	425
723.llvm_r	384	310	628	312	623	312	624	384	310	628	312	623	312	624
727.cppcheck_r	384	271	509	271	509	270	510	384	271	509	271	509	270	510
729.abc_r	384	393	448	392	449	393	448	384	393	448	392	449	393	448
734.vpr_r	384	361	491	359	493	360	492	384	361	491	359	493	360	492
735.gem5_r	384	236	791	235	794	237	790	384	236	791	235	794	237	790
750.sealcrypto_r	384	332	620	332	619	331	621	384	332	620	332	619	331	621
753.ns3_r	384	220	1070	221	1070	220	1070	384	220	1070	221	1070	220	1070
777.zstd_r	384	711	348	717	345	719	344	384	711	348	717	345	719	344

SPECrate®2026_int_base = **626**

SPECrate®2026_int_peak = **626**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 626

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
 To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 LD_LIBRARY_PATH =
 "/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_rate_aocc510_znver5_A_1
 ib/lib:/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_rate_aocc510_znve
 r5_A_lib/lib32:"
 MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS configuration:
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
 P-State set to Enabled
 NUMA Nodes per Socket set to NPS4
 Ll Stream HW Prefetcher set to Disabled

Sysinfo program /home/cpu2026-0.902.0-amd_aocc510_znver5_A1/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on localhost Fri Feb 6 01:04:50 2026

SUT (System Under Test) info as seen by some common utilities.

 Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

Platform Notes (Continued)

- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -srvrn
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
```

```
2. w
01:04:50 up 3 min, 1 user, load average: 0.28, 0.11, 0.03
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3093405
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 626

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
cpu time          (seconds, -t) unlimited
max user processes (-u) 3093405
virtual memory    (kbytes, -v) unlimited
file locks        (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
/bin/bash ./Run022-compliant-amd-rateint_base.sh
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.056/templogs/preenv.intrate.056.0.log --lognum 056.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-amd_aocc510_znver5_A1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb10104f
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 192 4K pages
cpu cores       : 192
siblings        : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.40.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```

Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                        384
On-line CPU(s) list:         0-383
Vendor ID:                     AuthenticAMD
Model name:                   AMD EPYC 9965 192-Core Processor
CPU family:                   26
Model:                         17
Thread(s) per core:          2
Core(s) per socket:          192
Socket(s):                     1
Stepping:                      0
Frequency boost:              enabled
CPU(s) scaling MHz:          102%
CPU max MHz:                  2250.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4493.16
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnm1 avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze
Virtualization:               AMD-V
L1d cache:                    9 MiB (192 instances)
L1i cache:                    6 MiB (192 instances)
L2 cache:                     192 MiB (192 instances)
L3 cache:                     384 MiB (12 instances)
NUMA node(s):                 4
NUMA node0 CPU(s):           0-47,192-239
NUMA node1 CPU(s):           48-95,240-287
NUMA node2 CPU(s):           96-143,288-335

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

Platform Notes (Continued)

NUMA node3 CPU(s): 144-191,336-383

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-47,192-239
node 0 size: 192991 MB
node 0 free: 192325 MB
node 1 cpus: 48-95,240-287
node 1 size: 193510 MB
node 1 free: 192856 MB
node 2 cpus: 96-143,288-335
node 2 size: 193510 MB
node 2 free: 192859 MB
node 3 cpus: 144-191,336-383
node 3 size: 193365 MB
node 3 free: 192700 MB
node distances:
node  0  1  2  3
0:  10 12 12 12
1:  12 10 12 12
2:  12 12 10 12
3:  12 12 12 10

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 626

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

9. /proc/meminfo
MemTotal: 791939292 kB

10. who -r
run-level 3 Feb 6 01:01

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd vncserver@
generated	ntp_sync
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=a635862e-6c31-42fc-9f53-c72582e21b20
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 282:
current policy: frequency should be within 1.50 GHz and 2.25 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

Platform Notes (Continued)

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

19. Disk information

SPEC is set to: /home/cpu2026-0.902.0-amd_aocc510_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 890G 59G 831G 7% /

20. /sys/devices/virtual/dmi/id

Vendor: Lenovo
Product: ThinkSystem SD535 V3
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
3x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
7x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: GPE123F-5.40
BIOS Date: 11/10/2025
BIOS Revision: 5.40
Firmware Revision: 10.10

Compiler Version Notes

C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

Compiler Version Notes (Continued)

```

=====
C++      | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
         | 753.ns3_r(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

```

=====
C++, C   | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
         | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

```

706.stockfish_r: -DSPEC_LP64
707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2026_int_base = 626

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_peak = 626

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

Base Portability Flags (Continued)

735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc
```

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD535 V3
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026_int_base = 626

SPECrate®2026_int_peak = 626

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Peak Optimization Flags (Continued)

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: basepeak = yes

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: basepeak = yes

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.html>
<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.xml>
<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 12:04:50-0500.
Report generated on 2026-05-11 16:38:28 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.