SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.50 GHz, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 5.19

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

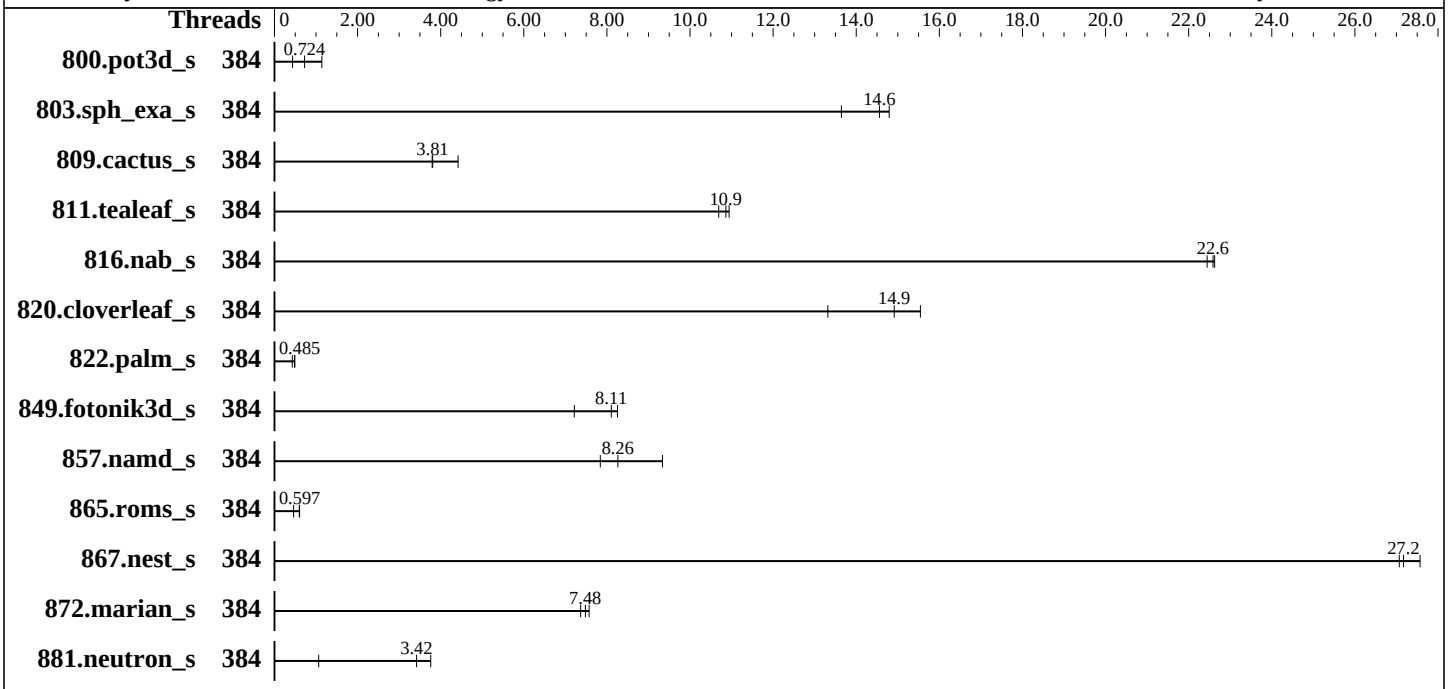

Hardware

CPU Name:	Intel Xeon 6748P
Max MHz:	4100
Nominal:	2500
Enabled:	192 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	192 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 960 GB M.2 NVME SSD
Cooling:	Air
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Lenovo BIOS Version RVE105I 1.20 released Dec-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.50 GHz, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 5.19

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	384	1546	0.435	591	1.14	**930**	**0.724**							
803.sph_exa_s	384	**85.0**	**14.6**	83.7	14.8	90.7	13.6							
809.cactus_s	384	296	3.79	254	4.42	**295**	**3.81**							
811.tealeaf_s	384	**51.3**	**10.9**	50.9	10.9	52.1	10.7							
816.nab_s	384	49.8	22.6	50.2	22.4	**49.9**	**22.6**							
820.cloverleaf_s	384	55.1	15.5	**57.5**	**14.9**	64.4	13.3							
822.palm_s	384	2863	0.429	**2530**	**0.485**	2514	0.489							
849.fotonik3d_s	384	**81.4**	**8.11**	80.0	8.25	91.5	7.22							
857.namd_s	384	156	9.34	**176**	**8.26**	185	7.84							
865.roms_s	384	1804	0.604	2368	0.460	**1825**	**0.597**							
867.nest_s	384	**79.5**	**27.2**	79.8	27.1	78.4	27.6							
872.marian_s	384	**145**	**7.48**	143	7.57	147	7.37							
881.neutron_s	384	**238**	**3.42**	766	1.06	217	3.76							

SPECspeed®2026_fp_base = 5.19

SPECspeed®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026-0.902.0-ic2025p3/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Workload Profile set to General Computing - Max Performance and then set it to Custom
LLC Prefetch set to Enabled
CPU P-state Control set to Cooperative with Legacy

 Sysinfo program /home/cpu2026-0.902.0-ic2025p3/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on localhost Fri Feb  6 06:50:38 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

 ------------------------------------------------------------
 2. w
    06:50:38 up 12:27,  1 user,  load average: 78.30, 153.95, 247.01
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8254675
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8254675
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 sh Run543-compliant-ic2025.3-lin-sapphirerapids-speedfp-base-smt-on-20260121.sh
 runcpu --nobuild --reportable --iterations=3 --action validate --define default-platform-flags -c
   ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 384 --define cores=192 --tune base -o
    all --define smt-on --define drop_caches fpspeed
 runcpu --nobuild --reportable --iterations 3 --action validate --define default-platform-flags --configfile
   ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 384 --define cores=192 --tune base
   --output_format all --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
    refspeed fpspeed --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2026.016/templogs/preenv.fpspeed.016.0.log --lognum 016.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-ic2025p3

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6748P
    vendor_id       : GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu family      : 6
     model           : 173
     stepping        : 1
     microcode       : 0x1000405
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
     cpu cores       : 48
     siblings        : 96
     4 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-47
     physical id 1: core ids 0-47
     physical id 2: core ids 0-47
     physical id 3: core ids 0-47
     physical id 0: apicids 0-95
     physical id 1: apicids 128-223
     physical id 2: apicids 256-351
     physical id 3: apicids 384-479
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            GenuineIntel
   Model name:                           Intel(R) Xeon(R) 6748P
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   48
   Socket(s):                            4
   Stepping:                             1
   CPU(s) scaling MHz:                   21%
   CPU max MHz:                          4100.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             5000.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
```

(Continued on next page)

Platform Notes (Continued)

```
                                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                  ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                 vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                  rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                 intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                     xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                 umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                   avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                  cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                 pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                           arch_capabilities
   Virtualization:                         VT-x
   L1d cache:                              9 MiB (192 instances)
   L1i cache:                              12 MiB (192 instances)
   L2 cache:                               384 MiB (192 instances)
   L3 cache:                               768 MiB (4 instances)
   NUMA node(s):                           4
   NUMA node0 CPU(s):                      0-47,192-239
   NUMA node1 CPU(s):                      48-95,240-287
   NUMA node2 CPU(s):                      96-143,288-335
   NUMA node3 CPU(s):                      144-191,336-383
   Vulnerability Gather data sampling:     Not affected
   Vulnerability Itlb multihit:            Not affected
   Vulnerability L1tf:                     Not affected
   Vulnerability Mds:                      Not affected
   Vulnerability Meltdown:                 Not affected
   Vulnerability Mmio stale data:          Not affected
   Vulnerability Reg file data sampling:   Not affected
   Vulnerability Retbleed:                 Not affected
   Vulnerability Spec rstack overflow:     Not affected
   Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                           PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                    Not affected
   Vulnerability Tsx async abort:          Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
       L1d       48K       9M   12 Data            1     64        1             64
       L1i       64K      12M   16 Instruction     1     64        1             64
       L2         2M     384M   16 Unified         2   2048        1             64
       L3       192M     768M   16 Unified         3 196608        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-47,192-239
  node 0 size: 515607 MB
  node 0 free: 514298 MB
  node 1 cpus: 48-95,240-287
  node 1 size: 516070 MB
  node 1 free: 514395 MB
  node 2 cpus: 96-143,288-335
  node 2 size: 516031 MB
  node 2 free: 514628 MB
  node 3 cpus: 144-191,336-383
  node 3 size: 515986 MB
  node 3 free: 514990 MB
  node distances:
  node   0   1   2   3
    0:  10  21  21  21
    1:  21  10  21  21
    2:  21  21  10  21
    3:  21  21  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113224632 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 5 18:24

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
                     wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
```

(Continued on next page)

Platform Notes (Continued)

```
                firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                 man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                 smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                 systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
                    vncserver@
  indirect          systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=5a678bc4-a730-4b05-8b78-acf3aaaa7251
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 150:
    current policy: frequency should be within 800 MHz and 4.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    40
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026-0.902.0-ic2025p3
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   854G   99G  756G  12% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR860 V4
    Product Family: ThinkSystem
    Serial:         9876543210

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
     11x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
     18x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
     3x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      RVE105I-1.20
    BIOS Date:         12/16/2025
    BIOS Revision:     1.20
    Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================
C       | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
        | 872.marian_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C  | 809.cactus_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:

803.sph_exa_s: `-m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

857.namd_s: `Same as 803.sph_exa_s`

867.nest_s: `Same as 803.sph_exa_s`

872.marian_s: `-m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Fortran benchmarks:
`-m64 -stand f18 -Wl,-z,muldefs -xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Benchmarks using both C and C++:
`-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.html
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.xml
http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 17:50:37-0500.
Report generated on 2026-05-04 23:34:14 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-05-05.