



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro


CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

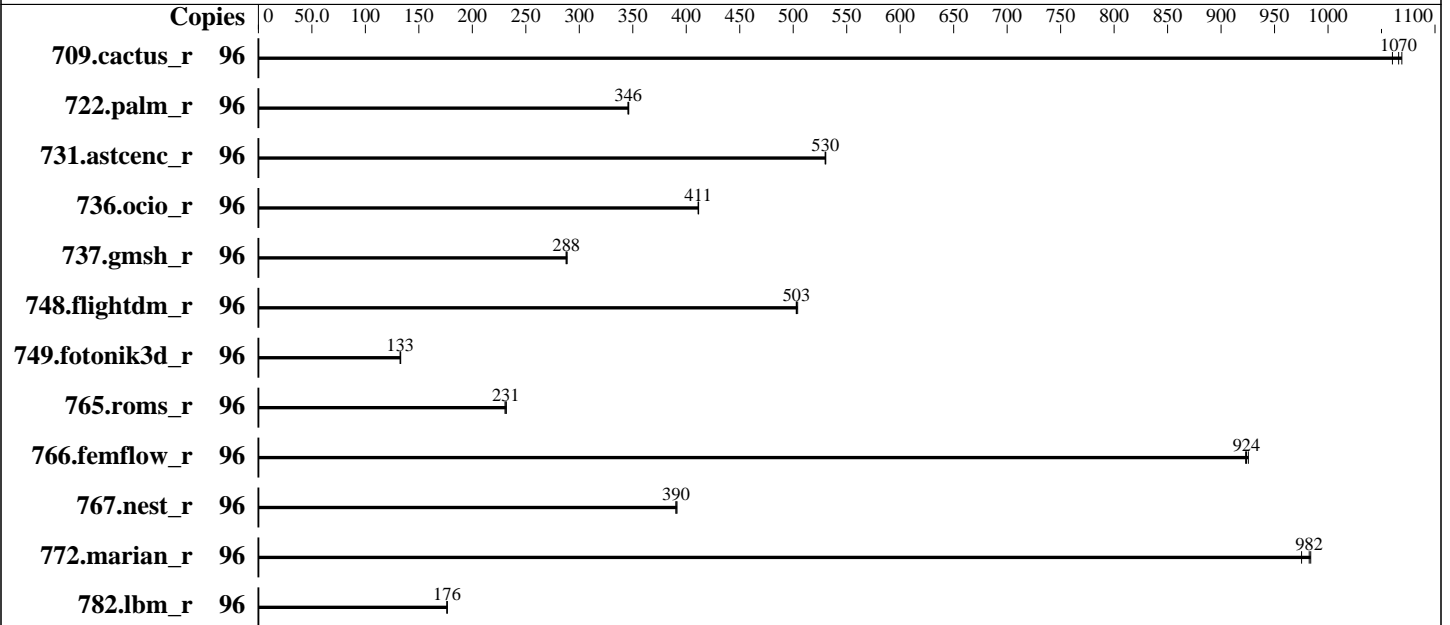

Hardware

CPU Name: AMD EPYC 9655
 Max MHz: 4500
 Nominal: 2600
 Enabled: 96 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: Air
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 6.8.0-94-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: Version 1.5a released Aug-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	96	77.7	1060	<u>77.3</u>	<u>1070</u>	77.1	1070	96	77.7	1060	<u>77.3</u>	<u>1070</u>	77.1	1070
722.palm_r	96	367	346	<u>366</u>	<u>346</u>	366	346	96	367	346	<u>366</u>	<u>346</u>	366	346
731.ascenc_r	96	152	530	152	530	<u>152</u>	<u>530</u>	96	152	530	152	530	<u>152</u>	<u>530</u>
736.ocio_r	96	204	412	<u>204</u>	<u>411</u>	204	411	96	204	412	<u>204</u>	<u>411</u>	204	411
737.gmsh_r	96	153	289	153	288	<u>153</u>	<u>288</u>	96	153	289	153	288	<u>153</u>	<u>288</u>
748.flightdm_r	96	<u>137</u>	<u>503</u>	136	504	137	503	96	<u>137</u>	<u>503</u>	136	504	137	503
749.fotonik3d_r	96	837	133	834	133	<u>836</u>	<u>133</u>	96	837	133	834	133	<u>836</u>	<u>133</u>
765.roms_r	96	652	232	<u>654</u>	<u>231</u>	656	231	96	652	232	<u>654</u>	<u>231</u>	656	231
766.femflow_r	96	152	926	<u>152</u>	<u>924</u>	153	923	96	152	926	<u>152</u>	<u>924</u>	153	923
767.nest_r	96	<u>195</u>	<u>390</u>	195	391	195	390	96	<u>195</u>	<u>390</u>	195	391	195	390
772.marian_r	96	154	984	<u>154</u>	<u>982</u>	155	975	96	154	984	<u>154</u>	<u>982</u>	155	975
782.lbm_r	96	312	176	312	176	<u>312</u>	<u>176</u>	96	312	176	312	176	<u>312</u>	<u>176</u>

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/spec/speccpu2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib:/spec/speccpu2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS settings:
SEV Control = Disabled
SMEE = Disabled
Memory Target Speed = DDR6400
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 400
Package Power Limit Control = Manual
Package Power Limit = 400
TSME = Disabled
NUMA nodes per socket = NPS4
SMT Control = Disabled

Sysinfo program /spec/speccpu2026rc2bsub/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on smc2349turin-os Mon Feb 2 02:57:49 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

1. `uname -srvm`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 255 (255.4-lubuntu8.10)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `sysctl`
16. `/sys/kernel/mm/transparent_hugepage`
17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
18. OS release
19. Disk information
20. `/sys/devices/virtual/dmi/id`
21. `dmidecode`
22. BIOS

```
-----
1. uname -srvm
Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86_64
-----
```

```
-----
2. w
02:57:49 up 16 min, 3 users, load average: 0.00, 0.00, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     10.23.196.148 02:54      16:25      0.00s     0.06s     sshd: root@notty
root      tty1     10.23.196.148 02:54      16:25      0.00s     0.10s     sshd: root@pts/0
root      tty1     -              02:50      7:01      0.11s     ?         -bash
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
-----
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
memory(kbytes)          unlimited
locked memory(kbytes)  2097152
process                 3093949
nofiles                 1024
vmemory(kbytes)        unlimited
locks                   unlimited
rtprio                  0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/speccpu2026rc2bsub
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9655 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002147
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 96
siblings      : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       96
On-line CPU(s) list:         0-95
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9655 96-Core Processor
BIOS Model name:              AMD EPYC 9655 96-Core Processor           Unknown CPU @ 2.6GHz
BIOS CPU family:              107
CPU family:                   26
Model:                        2
Thread(s) per core:          1
Core(s) per socket:          96
Socket(s):                    1
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                  2600.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     5200.23
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxext
                                perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                flush_lld debug_swap
L1d cache:                    4.5 MiB (96 instances)
L1i cache:                    3 MiB (96 instances)
L2 cache:                     96 MiB (96 instances)

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

L3 cache:                               384 MiB (12 instances)
NUMA node(s):                             4
NUMA node0 CPU(s):                        0-23
NUMA node1 CPU(s):                        24-47
NUMA node2 CPU(s):                        48-71
NUMA node3 CPU(s):                        72-95
Vulnerability Gather data sampling:       Not affected
Vulnerability Itlb multihit:              Not affected
Vulnerability L1tf:                       Not affected
Vulnerability Mds:                        Not affected
Vulnerability Meltdown:                   Not affected
Vulnerability Mmio stale data:            Not affected
Vulnerability Reg file data sampling:     Not affected
Vulnerability Retbleed:                   Not affected
Vulnerability Spec rstack overflow:       Not affected
Vulnerability Spec store bypass:          Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:                  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:                  Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                           disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                       Not affected
Vulnerability Tsx async abort:             Not affected
Vulnerability Vmscape:                     Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23
node 0 size: 193043 MB
node 0 free: 192226 MB
node 1 cpus: 24-47
node 1 size: 193527 MB
node 1 free: 192625 MB
node 2 cpus: 48-71
node 2 size: 193527 MB
node 2 free: 192993 MB
node 3 cpus: 72-95
node 3 size: 193466 MB
node 3 free: 192848 MB
node distances:

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

```
9. /proc/meminfo
   MemTotal:          792130700 kB
```

```
10. who -r
    run-level 5 Feb 2 02:41
```

```
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
    Default Target   Status
    graphical        running
```

```
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher nvme-fc-boot-connections nvme-fc-autoconnect open-iscsi open-vm-tools
                   pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
                   ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled        console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code
                   systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy
                   systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower
    generated       openipmi
    indirect        systemd-sysupdate systemd-sysupdate-reboot uidd
    masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-6.8.0-94-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv
    ro
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

14. cpupower frequency-info
   analyzing CPU 72:
     current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.

   boost state support:
     Supported: yes
     Active: yes
     Boost States: 0
     Total States: 3
     Pstate-P0: 2600MHz

```

```

-----
15. sysctl
   kernel.numa_balancing          1
   kernel.randomize_va_space     0
   vm.compaction_proactiveness   20
   vm.dirty_background_bytes     0
   vm.dirty_background_ratio     10
   vm.dirty_bytes                0
   vm.dirty_expire_centisecs    3000
   vm.dirty_ratio                8
   vm.dirty_writeback_centisecs  500
   vm.dirtytime_expire_seconds  43200
   vm.extfrag_threshold          500
   vm.min_unmapped_ratio        1
   vm.nr_hugepages               0
   vm.nr_hugepages_mempolicy     0
   vm.nr_overcommit_hugepages    0
   vm.swappiness                 1
   vm.watermark_boost_factor     15000
   vm.watermark_scale_factor     10
   vm.zone_reclaim_mode         1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
   defrag          [always] defer defer+madvice madvice never
   enabled        [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                1
   max_ptes_none         511
   max_ptes_shared       256

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

19. Disk information

SPEC is set to: /spec/speccpu2026rc2bsub

```
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  437G   25G  393G   6% /
```

20. /sys/devices/virtual/dmi/id

```
Vendor:      Supermicro
Product:     AS -1116CS-TN
Product Family: SMC H14
Serial:      S931316X4B12349
```

21. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  12x SK Hynix HMCG94AHBRA277N 64 GB 2 rank 6400
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.5a
BIOS Date:        08/11/2025
BIOS Revision:    5.35
```

Compiler Version Notes

```
=====  
C      | 782.lbm_r(base)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
| 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 709.cactus_r(base) 737.gmsh_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -fno-finite-math-only -DSPEC_LP64
737.gmsh_r: -fno-fast-math -DSPEC_LP64
748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -fno-finite-math-only -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.ascenc_r: basepeak = yes

736.ocio_r: basepeak = yes

748.flightdm_r: basepeak = yes

766.femflow_r: basepeak = yes

767.nest_r: basepeak = yes

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

CloudDC A+ Server AS -1116CS-TN
(H14SHM , AMD EPYC 9655)

SPECrate®2026_fp_base = 410

SPECrate®2026_fp_peak = 410

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Peak Optimization Flags (Continued)

737.gmsh_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-01 21:57:49-0500.
Report generated on 2026-05-11 16:38:04 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.