SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz,Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Jun-2023
Software Availability: Apr-2026

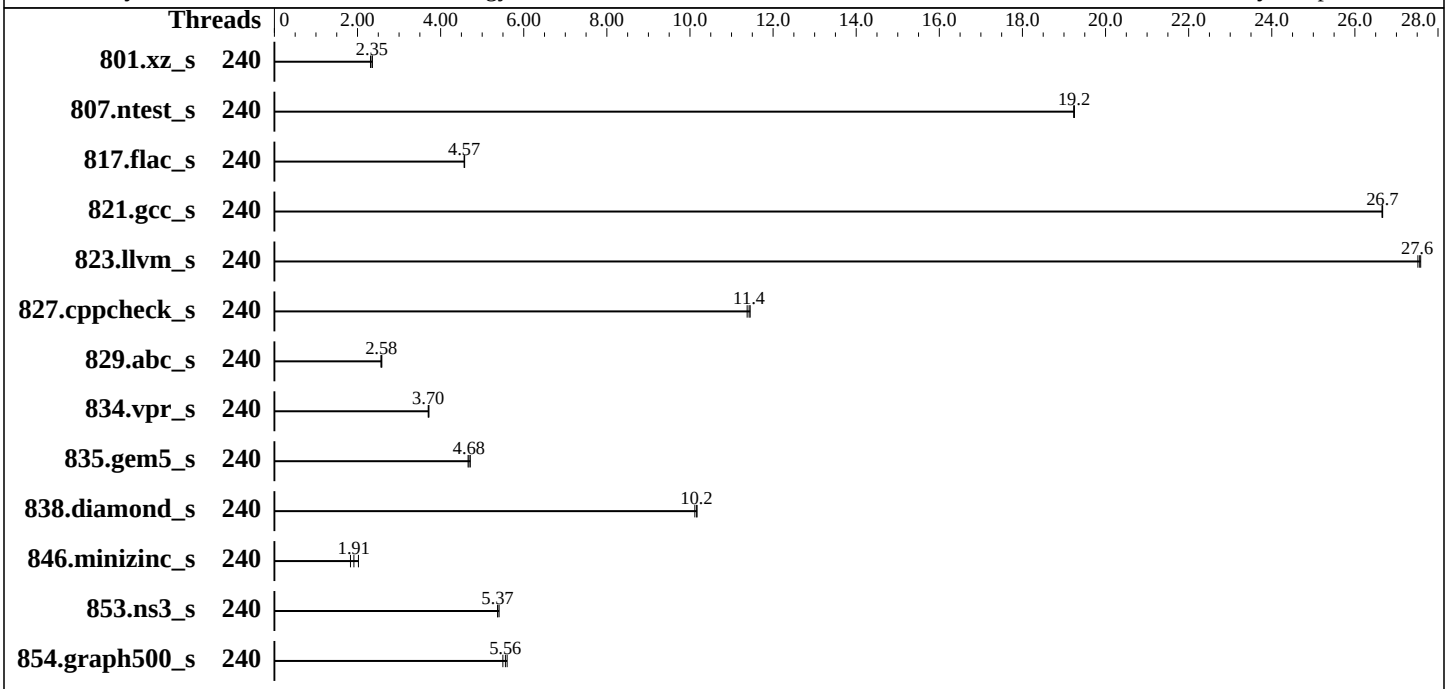

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	240 cores, 4 chips
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 960 GB M.2 NVME SSD
Cooling:	Air
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.6 (Plow) Kernel 5.14.0-570.12.1.el9_6.x86_64
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Lenovo BIOS Version RSE127G 8.50 released May-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz,Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Jun-2023
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	240	**252**	**2.35**	251	2.36	256	2.31							
807.ntest_s	240	59.3	19.2	**59.2**	**19.2**	59.2	19.3							
817.flac_s	240	**380**	**4.57**	380	4.57	379	4.58							
821.gcc_s	240	**77.6**	**26.7**	77.6	26.7	77.7	26.7							
823.llvm_s	240	**51.2**	**27.6**	51.3	27.5	51.2	27.6							
827.cppcheck_s	240	97.7	11.4	**98.0**	**11.4**	98.4	11.4							
829.abc_s	240	**323**	**2.58**	321	2.59	324	2.56							
834.vpr_s	240	**258**	**3.70**	256	3.72	258	3.70							
835.gem5_s	240	242	4.71	244	4.66	**243**	**4.68**							
838.diamond_s	240	98.4	10.2	98.9	10.1	**98.5**	**10.2**							
846.minizinc_s	240	366	1.83	**350**	**1.91**	331	2.02							
853.ns3_s	240	**215**	**5.37**	213	5.41	215	5.37							
854.graph500_s	240	111	5.50	109	5.60	**110**	**5.56**							

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2026-1.0.1-ic2026.0/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using CentOS Stream 9.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
AMP Prefetch set to Enabled
Misc set to Option4
HyperThreading set to Disabled
Page Policy set to Adaptive

 Sysinfo program /home/cpu2026-1.0.1-ic2026.0/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Fri May 29 04:17:33 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-51.el9)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 5.14.0-570.12.1.el9_6.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Apr 4 10:41:31 EDT 2025 x86_64

------------------------------------------------------------
 2. w
    04:17:33 up  2:21,  0 users,  load average: 52.59, 58.12, 39.31
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) unlimited
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 4126737
   max locked memory           (kbytes, -l) 8192
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 4126737
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 31
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: root [priv]
  sshd: root@notty
  /bin/bash ./02.remote_local_SPECcpu_1.02.sh
  sh Run552-compliant-ic2026.0-lin-sapphirerapids-speedint-base-smt-off-20260429.sh
 runcpu --nobuild --iterations=3 --reportable --action validate --define default-platform-flags -c
   ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 240 --define cores=240 --tune base -o
```

(Continued on next page)

Platform Notes (Continued)

```
    all --define intspeedaffinity --define drop_caches intspeed
 runcpu --nobuild --iterations 3 --reportable --action validate --define default-platform-flags --configfile
   ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 240 --define cores=240 --tune base
   --output_format all --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base
    --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.014/templogs/preenv.intspeed.014.0.log --lognum 014.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-1.0.1-ic2026.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000661
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
    cpu cores       : 60
    siblings        : 60
    4 physical ids (chips)
    240 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
    physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
    2,234,236,238,240,242,244,246
    physical id 2: apicids
   256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
   08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
    0,362,364,366,368,370,372,374
    physical id 3: apicids
   384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
   36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
    8,490,492,494,496,498,500,502
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu from util-linux 2.37.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        46 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               240
  On-line CPU(s) list:                  0-239
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) Platinum 8490H
  BIOS Model name:                      Intel(R) Xeon(R) Platinum 8490H
  CPU family:                           6
  Model:                                143
  Thread(s) per core:                   1
  Core(s) per socket:                   60
  Socket(s):                            4
  Stepping:                             8
  CPU(s) scaling MHz:                   100%
  CPU max MHz:                          3500.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             3800.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                        vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
                                        pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                        amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            11.3 MiB (240 instances)
  L1i cache:                            7.5 MiB (240 instances)
  L2 cache:                             480 MiB (240 instances)
  L3 cache:                             450 MiB (4 instances)
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-59
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node1 CPU(s):                    60-119
   NUMA node2 CPU(s):                    120-179
   NUMA node3 CPU(s):                    180-239
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K    11.3M   12 Data            1     64        1             64
      L1i       32K     7.5M    8 Instruction     1     64        1             64
      L2         2M     480M   16 Unified         2   2048        1             64
      L3     112.5M     450M   15 Unified         3 122880        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0-59
   node 0 size: 257694 MB
   node 0 free: 256454 MB
   node 1 cpus: 60-119
   node 1 size: 258032 MB
   node 1 free: 249923 MB
   node 2 cpus: 120-179
   node 2 size: 258032 MB
   node 2 free: 257296 MB
   node 3 cpus: 180-239
   node 3 size: 257971 MB
   node 3 free: 257296 MB
   node distances:
   node     0    1    2    3
      0:   10   21   21   21
      1:   21   10   21   21
      2:   21   21   10   21
```

(Continued on next page)

Platform Notes (Continued)

```
      3:   21   21   21   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056492628 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 29 01:56

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-51.el9)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                   LOAD   ACTIVE SUB    DESCRIPTION
  * dnf-makecache.service loaded failed failed dnf makecache

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled           NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                  lvm2-monitor mdmonitor microcode nis-domainname nvmefc-boot-connections rhsmcertd rsyslog
                       rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update
                       systemd-network-generator systemd-pstore udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot console-getty cpupower debug-shell dnf-system-upgrade
                  kvm_stat lvm-devices-import man-db-restart-cache-update nftables nvmf-autoconnect pesign
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
                       sshd-keygen@ systemd-boot-check-no-failures systemd-sysext
  indirect          sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                       systemd-sysupdate-reboot

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-570.12.1.el9_6.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
15. cpupower frequency-info
  analyzing CPU 190:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.6 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.6 (Plow)
  system-release Red Hat Enterprise Linux release 9.6 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2026-1.0.1-ic2026.0
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G   73G  746G   9% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR850 V3
    Product Family: ThinkSystem
    Serial:         None

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    32x SK Hynix HMCG88AEBRA168N 32 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      RSE127G-8.50
   BIOS Date:         05/15/2026
   BIOS Revision:     8.50
   Firmware Revision: 8.10
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
       | 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
       | 846.minizinc_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

834.vpr_s: -fno-fast-math

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.html
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.xml
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-28 16:17:33-0400.
Report generated on 2026-06-16 17:18:58 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-06-16.