



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## KTNF

(Test Sponsor: Telecommunications Technology Association)


## KTNF KR580S2

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

**hpc2021 License:** 068A  
**Test Sponsor:** Telecommunications Technology Association  
**Tested by:** Telecommunications Technology Association

**Test Date:** May-2022  
**Hardware Availability:** May-2022  
**Software Availability:** Jul-2021

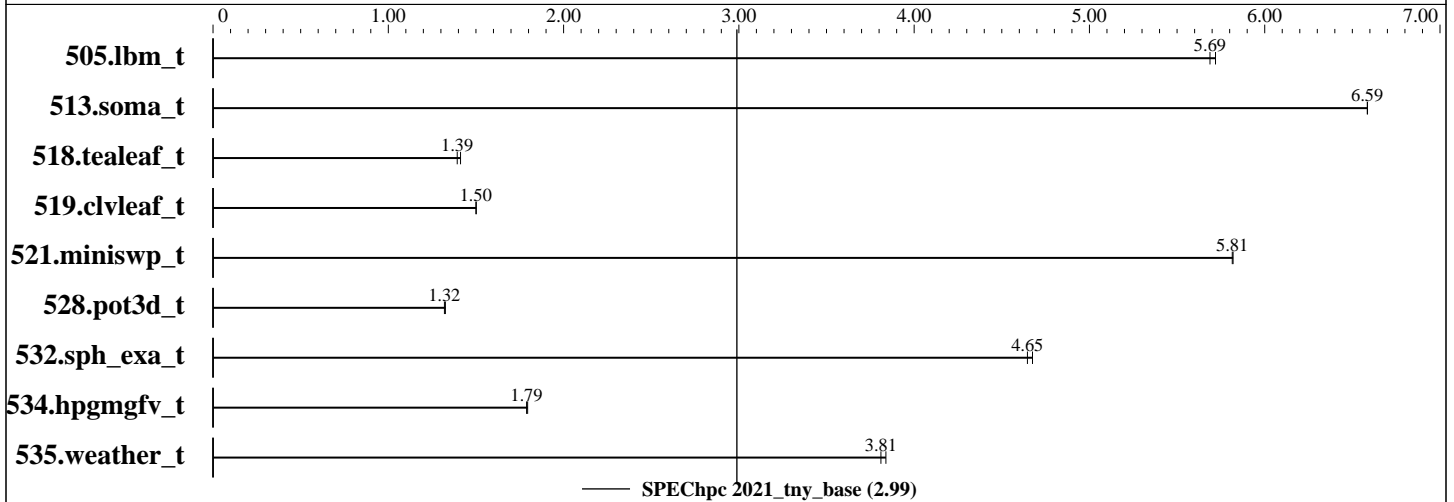

## Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	2	80	393	5.72	<b>396</b>	<b>5.69</b>											
513.soma_t	OMP	2	80	<b>562</b>	<b>6.59</b>	562	6.59											
518.tealeaf_t	OMP	2	80	1168	1.41	<b>1184</b>	<b>1.39</b>											
519.clvleaf_t	OMP	2	80	1098	1.50	<b>1100</b>	<b>1.50</b>											
521.miniswp_t	OMP	2	80	275	5.82	<b>275</b>	<b>5.81</b>											
528.pot3d_t	OMP	2	80	1603	1.33	<b>1610</b>	<b>1.32</b>											
532.sph_exa_t	OMP	2	80	417	4.68	<b>420</b>	<b>4.65</b>											
534.hpgmgfv_t	OMP	2	80	<b>657</b>	<b>1.79</b>	655	1.79											
535.weather_t	OMP	2	80	<b>846</b>	<b>3.81</b>	840	3.84											

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

**KTNF**

(Test Sponsor: Telecommunications Technology Association)

**KTNF KR580S2**

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

**hpc2021 License:** 068A  
**Test Sponsor:** Telecommunications Technology Association  
**Tested by:** Telecommunications Technology Association

**Test Date:** May-2022  
**Hardware Availability:** May-2022  
**Software Availability:** Jul-2021

## Hardware Summary

Type of System: SMP  
Compute Node: Compute Node  
Interconnect: None  
Compute Nodes Used: 1  
Total Chips: 2  
Total Cores: 80  
Total Threads: 160  
Total Memory: 512 GB  
Max. Peak Threads: --

## Software Summary

Compiler: C/C++/Fortran: Version 11.2 of GNU Compilers  
MPI Library: OpenMPI Version 4.1.3  
Other MPI Info: None  
Other Software: None  
Base Parallel Model: OMP  
Base Ranks Run: 2  
Base Threads Run: 80  
Peak Parallel Models: Not Run  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --  
Max. Peak Threads: --  
Min. Peak Threads: --

## Node Description: Compute Node

### Hardware

Number of nodes: 1  
Uses of the node: compute  
Vendor: KTNF  
Model: KTNF KR580S2  
CPU Name: Intel Xeon Platinum 8380  
CPU(s) orderable: 1,2 chips  
Chips enabled: 2  
Cores enabled: 80  
Cores per chip: 40  
Threads per core: 2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.4 GHz  
CPU MHz: 2300  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 60 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)  
Disk Subsystem: 2 x Samsung SSD 860 PRO 512GB (RAID 0)  
Other Hardware: None  
Accel Count: --  
Accel Model: --  
Accel Vendor: --  
Accel Type: --  
Accel Connection: --  
Accel ECC enabled: --  
Accel Description: --  
Adapter: None  
Number of Adapters: 0  
Slot Type: None  
Data Rate: None  
Ports Used: 0

### Software

Accelerator Driver: --  
Adapter: None  
Adapter Driver: None  
Adapter Firmware: None  
Operating System: CentOS Linux release 7.9.2009 (Core) 3.10.0-1160.66.1.el7.x86\_64  
Local File System: xfs  
Shared File System: None  
System State: Multi-user, run level 3  
Other Software: None

(Continued on next page)



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

**KTNF**

(Test Sponsor: Telecommunications Technology Association)

**KTNF KR580S2**

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

**hpc2021 License:** 068A  
**Test Sponsor:** Telecommunications Technology Association  
**Tested by:** Telecommunications Technology Association

**Test Date:** May-2022  
**Hardware Availability:** May-2022  
**Software Availability:** Jul-2021

## Node Description: Compute Node

### Hardware (Continued)

Interconnect Type: None

## Interconnect Description: None

### Hardware

Vendor: None  
Model: None  
Switch Model: None  
Number of Switches: 0  
Number of Ports: 0  
Data Rate: 0  
Firmware: None  
Topology: None  
Primary Use: None

### Software

: --

## Submit Notes

The config file option 'submit' was used.

MPI startup command:

```
mpirun --bind-to socket -npersocket 1 -np $ranks $command
```

## Compiler Version Notes

```
=====  
FC 519.clvleaf_t(base) 528.pot3d_t(base) 535.weather_t(base)  
=====
```

GNU Fortran (GCC) 11.2.0

Copyright (C) 2021 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```
=====  
CXXC 532.sph_exa_t(base)  
=====
```

g++ (GCC) 11.2.0

Copyright (C) 2021 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(Continued on next page)



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

**KTNF**

(Test Sponsor: Telecommunications Technology Association)

**KTNF KR580S2**

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

**hpc2021 License:** 068A  
**Test Sponsor:** Telecommunications Technology Association  
**Tested by:** Telecommunications Technology Association

**Test Date:** May-2022  
**Hardware Availability:** May-2022  
**Software Availability:** Jul-2021

## Compiler Version Notes (Continued)

CC 505.lbm\_t(base) 513.soma\_t(base) 518.tealeaf\_t(base) 521.miniswp\_t(base)  
534.hpgmgfv\_t(base)

-----  
gcc (GCC) 11.2.0  
Copyright (C) 2021 Free Software Foundation, Inc.  
This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  
-----

## Base Compiler Invocation

C benchmarks:  
mpicc

C++ benchmarks:  
mpicxx

Fortran benchmarks:  
mpif90

## Base Portability Flags

519.clvleaf\_t: -ffree-line-length-none(\*)  
528.pot3d\_t: -ffree-line-length-none(\*)  
535.weather\_t: -ffree-line-length-none(\*)

(\*) Indicates a portability flag that was found in a non-portability variable.

## Base Optimization Flags

C benchmarks:  
-fopenmp -Ofast -march=native

C++ benchmarks:  
-fopenmp -Ofast -march=native -std=c++14

Fortran benchmarks:  
-fopenmp -Ofast -march=native -fno-stack-protector



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

**KTNF**

(Test Sponsor: Telecommunications Technology Association)

**KTNF KR580S2**

SPEChpc 2021\_tny\_base = 2.99

SPEChpc 2021\_tny\_peak = Not Run

**hpc2021 License:** 068A  
**Test Sponsor:** Telecommunications Technology Association  
**Tested by:** Telecommunications Technology Association

**Test Date:** May-2022  
**Hardware Availability:** May-2022  
**Software Availability:** Jul-2021

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/hpc2021/flags/gcc.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/hpc2021/flags/gcc.xml>

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.0.3 on 2022-05-26 01:30:36-0400.  
Report generated on 2022-06-30 11:34:10 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2022-06-22.