



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Cisco Systems

SPEChpc 2021\_sml\_base = 1.59

## Cisco UCS C245 M8 (AMD EPYC 9754)

SPEChpc 2021\_sml\_peak = Not Run

hpc2021 License: 9019


Test Date: May-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

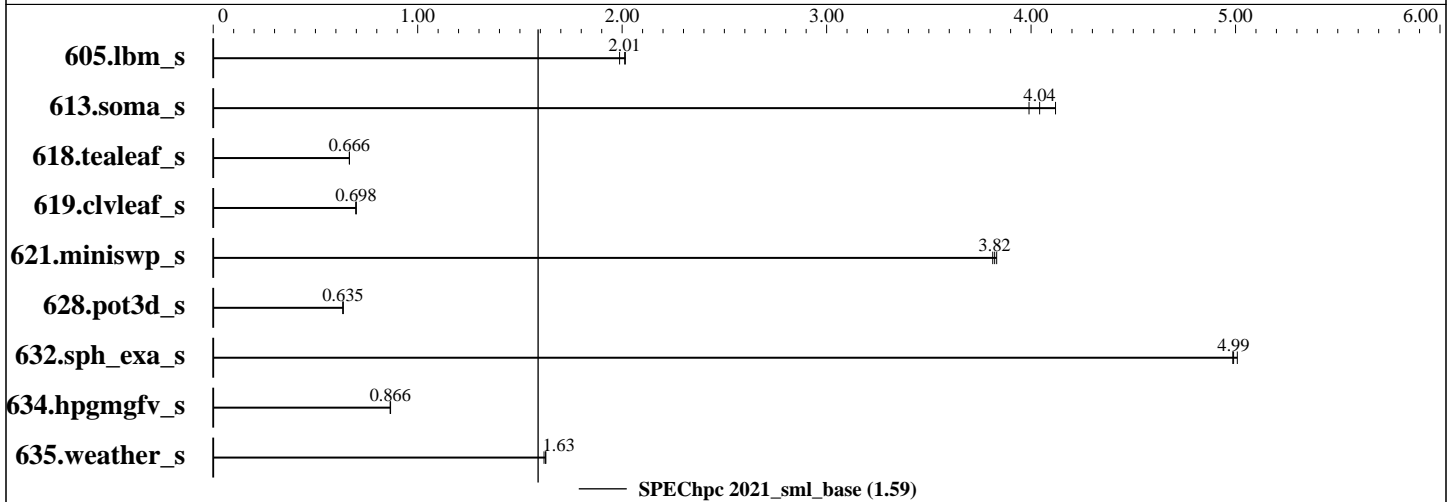

## Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	OMP	32	16	769	2.02	780	1.99	<b><u>770</u></b>	<b><u>2.01</u></b>									
613.soma_s	OMP	32	16	388	4.12	401	3.99	<b><u>396</u></b>	<b><u>4.04</u></b>									
618.tealeaf_s	OMP	32	16	<b><u>3077</u></b>	<b><u>0.666</u></b>	3078	0.666	3077	0.666									
619.clvleaf_s	OMP	32	16	2363	0.698	2361	0.699	<b><u>2362</u></b>	<b><u>0.698</u></b>									
621.miniswp_s	OMP	32	16	287	3.83	<b><u>288</u></b>	<b><u>3.82</u></b>	289	3.81									
628.pot3d_s	OMP	32	16	2637	0.635	2641	0.634	<b><u>2637</u></b>	<b><u>0.635</u></b>									
632.sph_exa_s	OMP	32	16	<b><u>461</u></b>	<b><u>4.99</u></b>	461	4.99	459	5.01									
634.hpgmgfv_s	OMP	32	16	1124	0.867	1126	0.866	<b><u>1125</u></b>	<b><u>0.866</u></b>									
635.weather_s	OMP	32	16	<b><u>1599</u></b>	<b><u>1.63</u></b>	1607	1.62	1599	1.63									

SPEChpc 2021\_sml\_base = 1.59

SPEChpc 2021\_sml\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Cisco Systems

SPEChpc 2021\_sml\_base = 1.59

## Cisco UCS C245 M8 (AMD EPYC 9754)

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Feb-2024

### Hardware Summary

Type of System: Homogenous  
Compute Node: Cisco UCS C245 M8  
Compute Nodes Used: 1  
Total Chips: 2  
Total Cores: 256  
Total Threads: 512  
Total Memory: 1536 GB  
Max. Peak Threads: --

### Software Summary

Compiler: Intel oneAPI DPC++/C++ Compiler 2024.0.2  
MPI Library: Intel MPI Library for Linux OS, Build 20231005  
Other MPI Info: None  
Other Software: None  
Base Parallel Model: OMP  
Base Ranks Run: 32  
Base Threads Run: 16  
Peak Parallel Models: Not Run  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --  
Max. Peak Threads: --  
Min. Peak Threads: --

## Node Description: Cisco UCS C245 M8

### Hardware

Number of nodes: 1  
Uses of the node: compute  
Vendor: Cisco Systems  
Model: Cisco UCS C245 M8  
CPU Name: AMD EPYC 9754  
CPU(s) orderable: 1,2 chips  
Chips enabled: 2  
Cores enabled: 256  
Cores per chip: 128  
Threads per core: 2  
CPU Characteristics: Max. Boost Clock upto 3.1GHz  
CPU MHz: 2250  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 256 MB I+D on chip per chip  
16 MB shared / 8 cores  
Other Cache: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800 MHz)  
Disk Subsystem: 1 x 960 GB NVMe SSD  
Other Hardware: None  
Accel Count: 0  
Accel Model: None  
Accel Vendor: None  
Accel Type: None  
Accel Connection: None  
Accel ECC enabled: None  
Accel Description: None  
Adapter: None  
Number of Adapters: 0  
Slot Type: None  
Data Rate: None

### Software

Accelerator Driver: --  
Adapter: None  
Adapter Driver: None  
Adapter Firmware: None  
Operating System: SUSE Linux Enterprise Server 15 SP5  
Kernel 5.14.21-150500.53-default  
Local File System: xfs  
Shared File System: None  
System State: Multi-user, run level 3  
Other Software: None

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

## Cisco Systems

SPEChpc 2021\_sml\_base = 1.59

## Cisco UCS C245 M8 (AMD EPYC 9754)

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Feb-2024

### Node Description: Cisco UCS C245 M8

#### Hardware (Continued)

Ports Used: 0  
Interconnect Type: None

### Submit Notes

The config file option 'submit' was used.

### Compiler Version Notes

=====  
CXXC 632.sph\_exa\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler 2024.1.0 (2024.1.0.20240308)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/intel/oneapi/compiler/2024.1/bin/compiler  
Configuration file: /opt/intel/oneapi/compiler/2024.1/bin/compiler/./icpx.cfg  
=====

=====  
CC 605.lbm\_s(base) 613.soma\_s(base) 618.tealeaf\_s(base) 621.miniswp\_s(base)  
634.hpgmgfv\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler 2024.1.0 (2024.1.0.20240308)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/intel/oneapi/compiler/2024.1/bin/compiler  
Configuration file: /opt/intel/oneapi/compiler/2024.1/bin/compiler/./icx.cfg  
=====

=====  
FC 619.clvleaf\_s(base) 635.weather\_s(base)  
=====

ifx (IFX) 2024.1.0 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
FC 628.pot3d\_s(base)  
=====

ifx: command line warning #10157: ignoring option '-W'; argument is of wrong type  
ifx (IFX) 2024.1.0 20240308

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Cisco Systems

SPEChpc 2021\_sml\_base = 1.59

Cisco UCS C245 M8 (AMD EPYC 9754)

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Feb-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx
```

C++ benchmarks:

```
mpiicpc -cxx=icpx
```

Fortran benchmarks:

```
mpiifort -fc=ifx
```

## Base Portability Flags

```
605.lbm_s: -lstdc++  
613.soma_s: -lstdc++  
618.tealeaf_s: -lstdc++  
619.clvleaf_s: -lstdc++  
621.miniswp_s: -lstdc++  
628.pot3d_s: -lstdc++  
632.sph_exa_s: -lstdc++  
634.hpgmgfv_s: -lstdc++  
635.weather_s: -lstdc++
```

## Base Optimization Flags

C benchmarks:

```
-Ofast -ipo -mprefer-vector-width=512 -march=common-avx512 -fiopenmp  
-ansi-alias
```

C++ benchmarks:

```
-Ofast -ipo -mprefer-vector-width=512 -march=common-avx512 -fiopenmp  
-ansi-alias
```

Fortran benchmarks:

```
-Ofast -ipo -mprefer-vector-width=512 -march=common-avx512 -fiopenmp  
-nostandard-realloc-lhs -align array64byte
```



# SPEChpc™ 2021 Small Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Cisco Systems

SPEChpc 2021\_sml\_base = 1.59

Cisco UCS C245 M8 (AMD EPYC 9754)

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** May-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Feb-2024

## Base Other Flags

Fortran benchmarks:

628.pot3d\_s: -Wno-incompatible-function-pointer-types

The flags file that was used to format this result can be browsed at

[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags\\_hpc.2024.html](http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags\\_hpc.2024.xml](http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.xml)

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.1.8 on 2024-04-19 08:14:03-0400.  
Report generated on 2024-05-29 12:43:04 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2024-05-29.