



SPEC ACCEL™ ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)


Tesla V100-PCIE-16GB SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

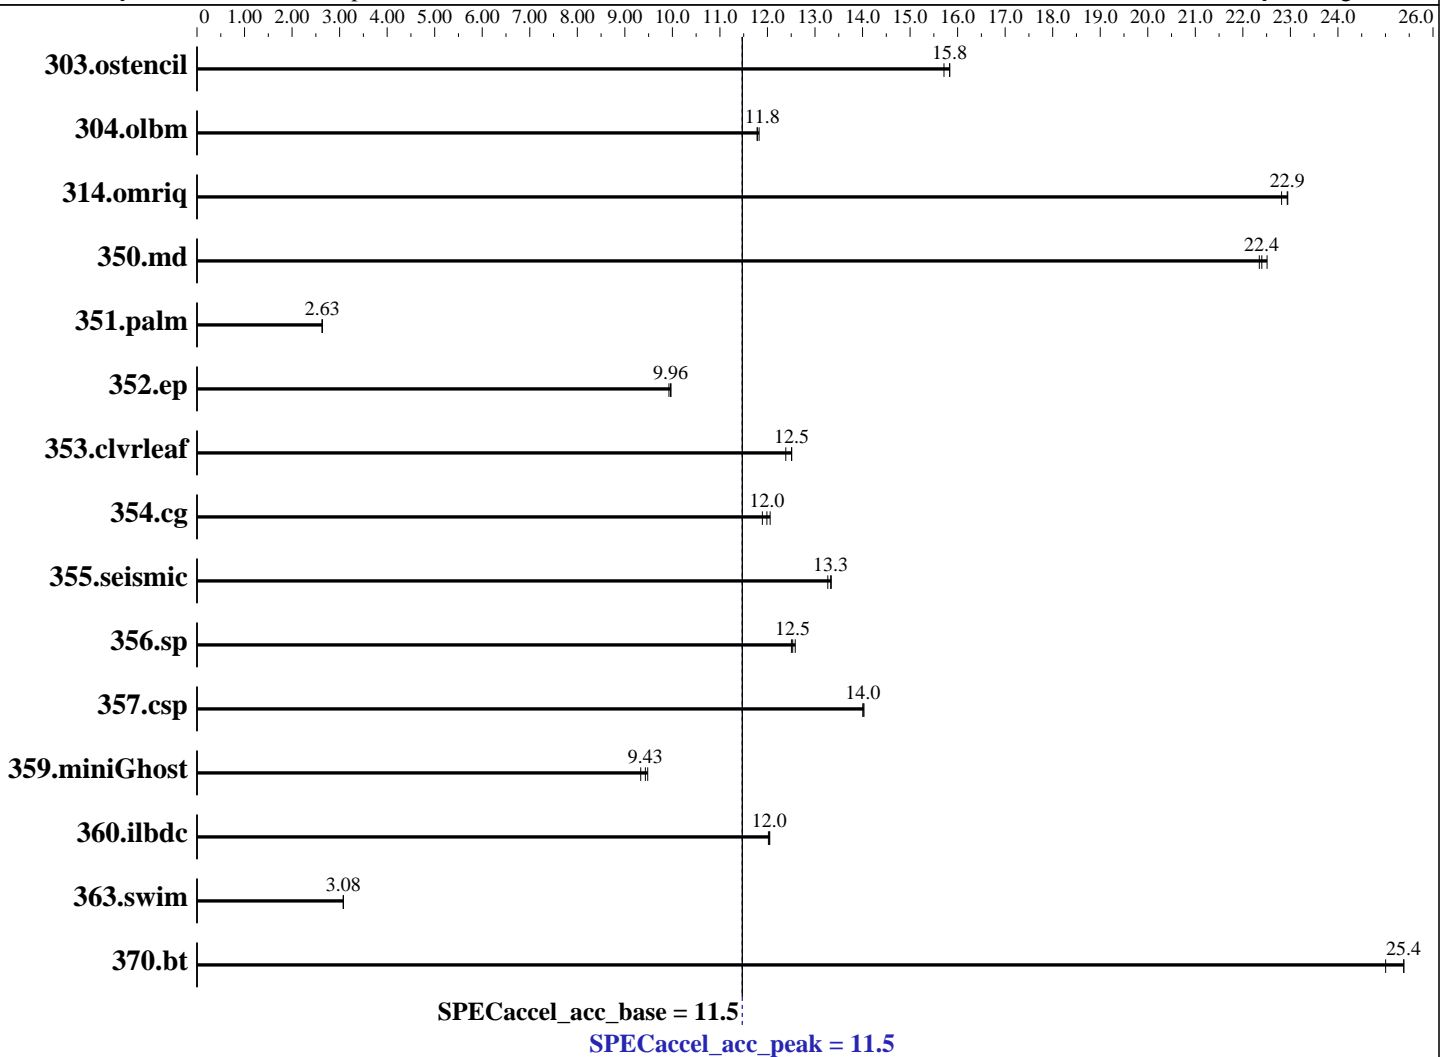

Hardware

CPU Name: Intel Xeon Gold 6148
 CPU Characteristics:
 CPU MHz: 2400
 CPU MHz Maximum: 3700
 FPU: Integrated
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 28160 KB I+D on chip per chip
 Other Cache: None

Continued on next page

Accelerator

Accel Model Name: Tesla V100
 Accel Vendor: NVIDIA Corporation
 Accel Name: Tesla V100-PCIE-16GB
 Type of Accel: GPU
 Accel Connection: PCIe
 Does Accel Use ECC: Yes
 Accel Description: See notes
 Accel Driver: NVIDIA UNIX x86_64 Kernel Module 390.46



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

Hardware (Continued)

Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 512GB Samsung 960 PRO M.2 PCIe 3.0 x4 NVMe Solid State Drive
Other Hardware: None

Software

Operating System: CentOS Linux release 7.4.1708 (Core) 3.10.0-693.17.1.el7.x86_64
Compiler: PGI Professional Edition, Release 18.7 LLVM
File System: xfs
System State: Run level 3 (multi-user)
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
303.ostencil	9.23	15.7	9.16	15.8	<u>9.16</u>	<u>15.8</u>	9.23	15.7	9.16	15.8	<u>9.16</u>	<u>15.8</u>
304.olbm	38.6	11.8	38.6	11.8	38.5	11.8	38.6	11.8	38.6	11.8	38.5	11.8
314.omriq	<u>41.7</u>	<u>22.9</u>	41.7	22.9	41.9	22.8	<u>41.7</u>	<u>22.9</u>	41.7	22.9	41.9	22.8
350.md	<u>11.3</u>	<u>22.4</u>	11.2	22.5	11.3	22.3	<u>11.3</u>	<u>22.4</u>	11.2	22.5	11.3	22.3
351.palm	141	2.63	141	2.63	140	2.64	141	2.63	141	2.63	140	2.64
352.ep	<u>53.2</u>	<u>9.96</u>	53.4	9.93	53.2	9.97	<u>53.2</u>	<u>9.96</u>	53.4	9.93	53.2	9.97
353.clvleaf	35.6	12.5	35.9	12.4	35.6	12.5	35.6	12.5	35.9	12.4	35.6	12.5
354.cg	34.3	11.9	34.0	12.0	33.8	12.1	34.3	11.9	34.0	12.0	33.8	12.1
355.seismic	27.9	13.3	27.7	13.3	27.8	13.3	27.9	13.3	27.7	13.3	27.8	13.3
356.sp	22.0	12.5	22.1	12.5	21.9	12.6	22.0	12.5	22.1	12.5	21.9	12.6
357.csp	19.3	14.0	19.2	14.0	19.3	14.0	19.3	14.0	19.2	14.0	19.3	14.0
359.miniGhost	39.1	9.43	38.9	9.48	39.5	9.33	39.1	9.43	38.9	9.48	39.5	9.33
360.ilbdc	30.5	12.0	30.5	12.0	30.5	12.0	30.5	12.0	30.5	12.0	30.5	12.0
363.swim	74.6	3.08	74.7	3.08	74.8	3.08	74.6	3.08	74.7	3.08	74.8	3.08
370.bt	8.92	25.0	8.79	25.4	8.78	25.4	8.92	25.0	8.79	25.4	8.78	25.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
Submit command: numactl -C 1 -m 0 \$command



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB
SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

Operating System Notes

Stacksize set to 'unlimited'

Platform Notes

Sysinfo program /local/home/aglobus/spec-accel/Docs/sysinfo
\$Rev: 6965 \$ \$Date:: 2015-04-21 #\$ c05a7f14b1b1765e3fe1df68447e8a35
running on perf-sky2.pgi.net Wed Jul 25 20:12:07 2018

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings  : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      394873648 kB
HugePages_Total:       20
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
CentOS Linux release 7.4.1708 (Core)
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.4.1708 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.4 (Source)
os-release:
NAME="CentOS Linux"
VERSION="7 (Core)"
ID="centos"
ID_LIKE="rhel fedora"
VERSION_ID="7"
PRETTY_NAME="CentOS Linux 7 (Core)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.4.1708 (Core)
system-release: CentOS Linux release 7.4.1708 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

Continued on next page



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB
SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

Platform Notes (Continued)

```
uname -a:
Linux perf-sky2.pgi.net 3.10.0-693.17.1.el7.x86_64 #1 SMP Thu Jan 25 20:13:58
UTC 2018 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 29 15:36
```

```
SPEC is set to: /local/home/aglobus/spec-acccl
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos_sky2-root xfs  472G   60G  413G  13% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
(End of data from sysinfo program)
Information from pgaccelinfo
CUDA Driver Version:          9010
NVRM version:                 NVIDIA UNIX x86_64 Kernel Module  390.46
Device Number:                0
Device Name:                  Tesla V100-PCIE-16GB
Device Revision Number:       7.0
Global Memory Size:           16945512448
Number of Multiprocessors:     80
Concurrent Copy and Execution: Yes
Total Constant Memory:         65536
Total Shared Memory per Block: 49152
Registers per Block:           65536
Warp Size:                     32
Maximum Threads per Block:    1024
Maximum Block Dimensions:     1024, 1024, 64
Maximum Grid Dimensions:      2147483647 x 65535 x 65535
Maximum Memory Pitch:         2147483647B
Texture Alignment:             512B
Clock Rate:                    1380 MHz
Execution Timeout:             No
Integrated Device:             No
Can Map Host Memory:          Yes
Compute Mode:                  default
Concurrent Kernels:           Yes
ECC Enabled:                   Yes
Memory Clock Rate:            877 MHz
Memory Bus Width:              4096 bits
L2 Cache Size:                 6291456 bytes
Max Threads Per SMP:          2048
Async Engines:                 7
```

Continued on next page



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB
SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

Platform Notes (Continued)

Unified Addressing: Yes
Managed Memory: Yes
Concurrent Managed Memory: Yes
Preemption Supported: Yes
Cooperative Launch: Yes
Multi-Device: Yes
PGI Default Target: -ta=tesla:cc70

General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
pgcc
Fortran benchmarks:
pgfortran
Benchmarks using both Fortran and C:
pgcc pgfortran

Base Optimization Flags

C benchmarks:
-Mllvm -V18.7 -fast -Mfprelaxed -Mnouniform -acc -ta=tesla:cc70
Fortran benchmarks:
-Mllvm -V18.7 -fast -Mfprelaxed -Mnouniform -acc -ta=tesla:cc70
Benchmarks using both Fortran and C:
353.cvrfleaf: -Mllvm -V18.7 -fast -Mfprelaxed -Mnouniform -acc
-ta=tesla:cc70
359.miniGhost: -Mllvm -V18.7 -fast -Mfprelaxed -Mnouniform -acc
-ta=tesla:cc70 -Mnomain



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB
SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

Peak Optimization Flags

C benchmarks:

- 303.ostencil: basepeak = yes
- 304.olbm: basepeak = yes
- 314.omriq: basepeak = yes
- 352.ep: basepeak = yes
- 354.cg: basepeak = yes
- 357.csp: basepeak = yes
- 370.bt: basepeak = yes

Fortran benchmarks:

- 350.md: basepeak = yes
- 351.palm: basepeak = yes
- 355.seismic: basepeak = yes
- 356.sp: basepeak = yes
- 360.ilbdc: basepeak = yes
- 363.swim: basepeak = yes

Benchmarks using both Fortran and C:

- 353.clvrleaf: basepeak = yes
- 359.miniGhost: basepeak = yes

The flags files that were used to format this result can be browsed at

<https://www.spec.org/accel/flags/PGI-Platform-Multicore-OMP.html>
https://www.spec.org/accel/flags/pgi2018_flags.html

You can also download the XML flags sources by saving the following links:

<https://www.spec.org/accel/flags/PGI-Platform-Multicore-OMP.xml>
https://www.spec.org/accel/flags/pgi2018_flags.xml



SPEC ACCEL ACC Result

Copyright 2015-2018 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: NVIDIA Corporation)

Tesla V100-PCIE-16GB
SuperServer 1029GQ-TRT

SPECaccel_acc_peak = 11.5

SPECaccel_acc_base = 11.5

ACCEL license: 019
Test sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: Aug-2018

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.2.
Report generated on Thu Aug 30 18:55:40 2018 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 30 August 2018.