



SPEC ACCEL™ OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7H12 CPU
ThinkSystem SR665

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 10.5

ACCEL license: 16


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

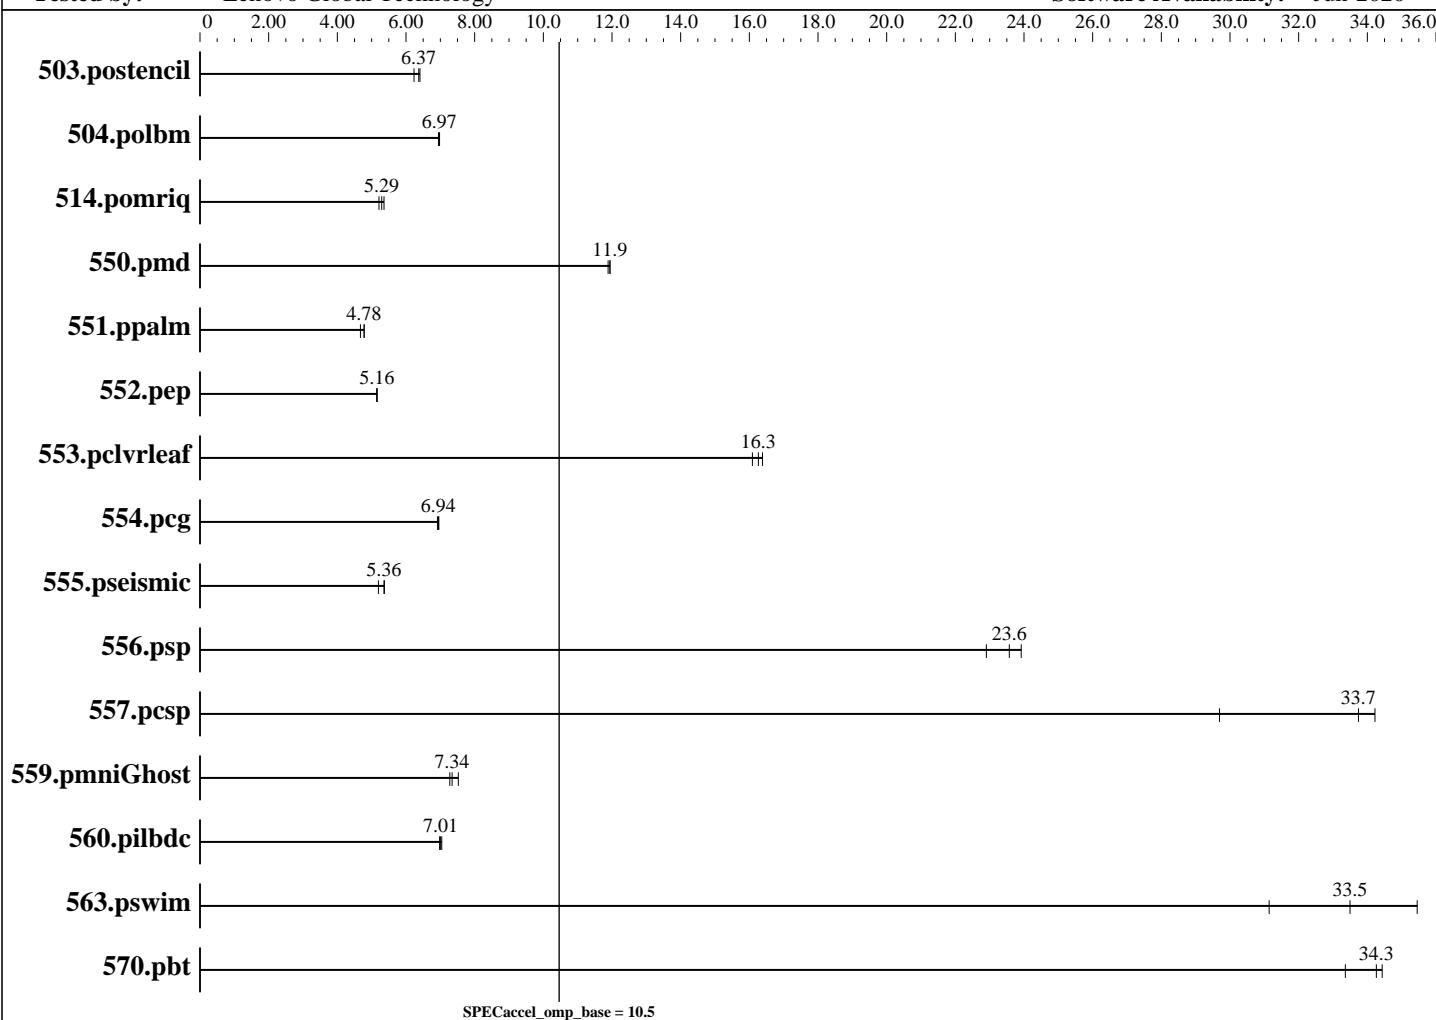

Hardware

CPU Name: AMD EPYC 7H12
CPU Characteristics: Turbo up to 3.3 GHz
CPU MHz: 2600
CPU MHz Maximum: 3300
FPU: Integrated
CPU(s) enabled: 128 cores, 2 chips, 64 cores/chip, 2 threads/core
CPU(s) orderable: 1-2 Chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 256 MB I+D on chip per chip
16 MB shared / 4 cores

Accelerator

Accel Model Name: EPYC 7H12 CPU
Accel Vendor: AMD
Accel Name: EPYC 7H12 CPU
Type of Accel: CPU
Accel Connection: Not applicable
Does Accel Use ECC: yes
Accel Description: 1 x AMD EPYC 7H12 CPU
Accel Driver: Not applicable

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7H12 CPU
ThinkSystem SR665

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 10.5

ACCEL license: 16

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Hardware (Continued)

Other Cache: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Disk Subsystem: 1 x 480 GB 2.5" SSD
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 15 SP1,
kernel 4.12.14-195-default
Compiler: Intel C/C++/Fortran 20.0 for Linux
Version 19.1.0.166 Build 20191121
File System: btrfs
System State: Run-level 3
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.postencil	<u>17.1</u>	<u>6.37</u>	17.0	6.41	17.5	6.23						
504.polbm	17.6	6.95	<u>17.5</u>	<u>6.97</u>	17.5	6.98						
514.pomriq	<u>117</u>	<u>5.29</u>	116	5.36	119	5.21						
550.pmd	20.3	11.9	<u>20.2</u>	<u>11.9</u>	20.2	11.9						
551.pppalm	114	4.78	<u>114</u>	<u>4.78</u>	116	4.67						
552.pep	44.9	5.15	<u>44.8</u>	<u>5.16</u>	44.8	5.16						
553pclvleaf	<u>70.4</u>	<u>16.3</u>	71.2	16.1	69.9	16.4						
554.pcg	<u>47.9</u>	<u>6.94</u>	48.1	6.92	47.9	6.96						
555.pseismic	54.3	5.20	52.5	5.37	<u>52.6</u>	<u>5.36</u>						
556.psp	<u>34.7</u>	<u>23.6</u>	35.7	22.9	34.2	23.9						
557.pcsp	25.1	34.2	28.9	29.7	<u>25.5</u>	<u>33.7</u>						
559.pmniGhost	54.6	7.28	52.8	7.52	<u>54.1</u>	<u>7.34</u>						
560.pilbdc	92.7	7.04	93.6	6.98	<u>93.2</u>	<u>7.01</u>						
563.pswim	4.48	35.5	5.11	31.1	<u>4.75</u>	<u>33.5</u>						
570.pbt	<u>22.8</u>	<u>34.3</u>	23.4	33.4	22.7	34.4						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7H12 CPU
ThinkSystem SR665

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 10.5

ACCEL license: 16

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

Platform Notes

```
Sysinfo program /home/ACCEL1.3/Docs/sysinfo
running on linux-x8nq Fri Feb 15 00:13:46 2019
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7H12 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
    22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
    47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
    22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
    47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
  cache size : 512 KB
```

```
From /proc/meminfo
MemTotal:      1056669592 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-x8nq 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019
(8fba516) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 14 22:22
```

```
SPEC is set to: /home/ACCEL1.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        btrfs  444G  160G  284G  37%  /home
Continued on next page
```



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7H12 CPU
ThinkSystem SR665

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 10.5

ACCEL license: 16

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo D8E105F-1.00 03/19/2020

Memory:

16x Samsung M393A8G40AB2-CWE 64 kB 2 rank 3200 MT/s
16x Unknown Unknown

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

503.postencil: -DSPEC_USE_INNER SIMD
504.polbm: -DSPEC_USE_INNER SIMD
514.pomriq: -DSPEC_USE_INNER SIMD
550.pmd: -DSPEC_USE_INNER SIMD -80
551.ppalms: -DSPEC_USE_INNER SIMD
552.pep: -DSPEC_USE_INNER SIMD
553pclvrleaf: -DSPEC_USE_INNER SIMD
554.pcg: -DSPEC_USE_INNER SIMD
555.pseismic: -DSPEC_USE_INNER SIMD
556.psp: -DSPEC_USE_INNER SIMD
557.pcsp: -DSPEC_USE_INNER SIMD
559.pnniGhost: -DSPEC_USE_INNER SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER SIMD
563.pswim: -DSPEC_USE_INNER SIMD
570.pbt: -DSPEC_USE_INNER SIMD



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7H12 CPU
ThinkSystem SR665

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 10.5

ACCEL license: 16

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

Base Optimization Flags

C benchmarks:

```
-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div  
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2
```

Fortran benchmarks:

```
-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div  
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2
```

Benchmarks using both Fortran and C:

```
-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div  
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2
```

The flags file that was used to format this result can be browsed at

<https://www.spec.org/accel/flags/Intel-ICC-linux64.html>

You can also download the XML flags source by saving the following link:

<https://www.spec.org/accel/flags/Intel-ICC-linux64.xml>

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.3.
Report generated on Wed May 6 12:04:29 2020 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 6 May 2020.