



# SPEC ACCEL™ OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

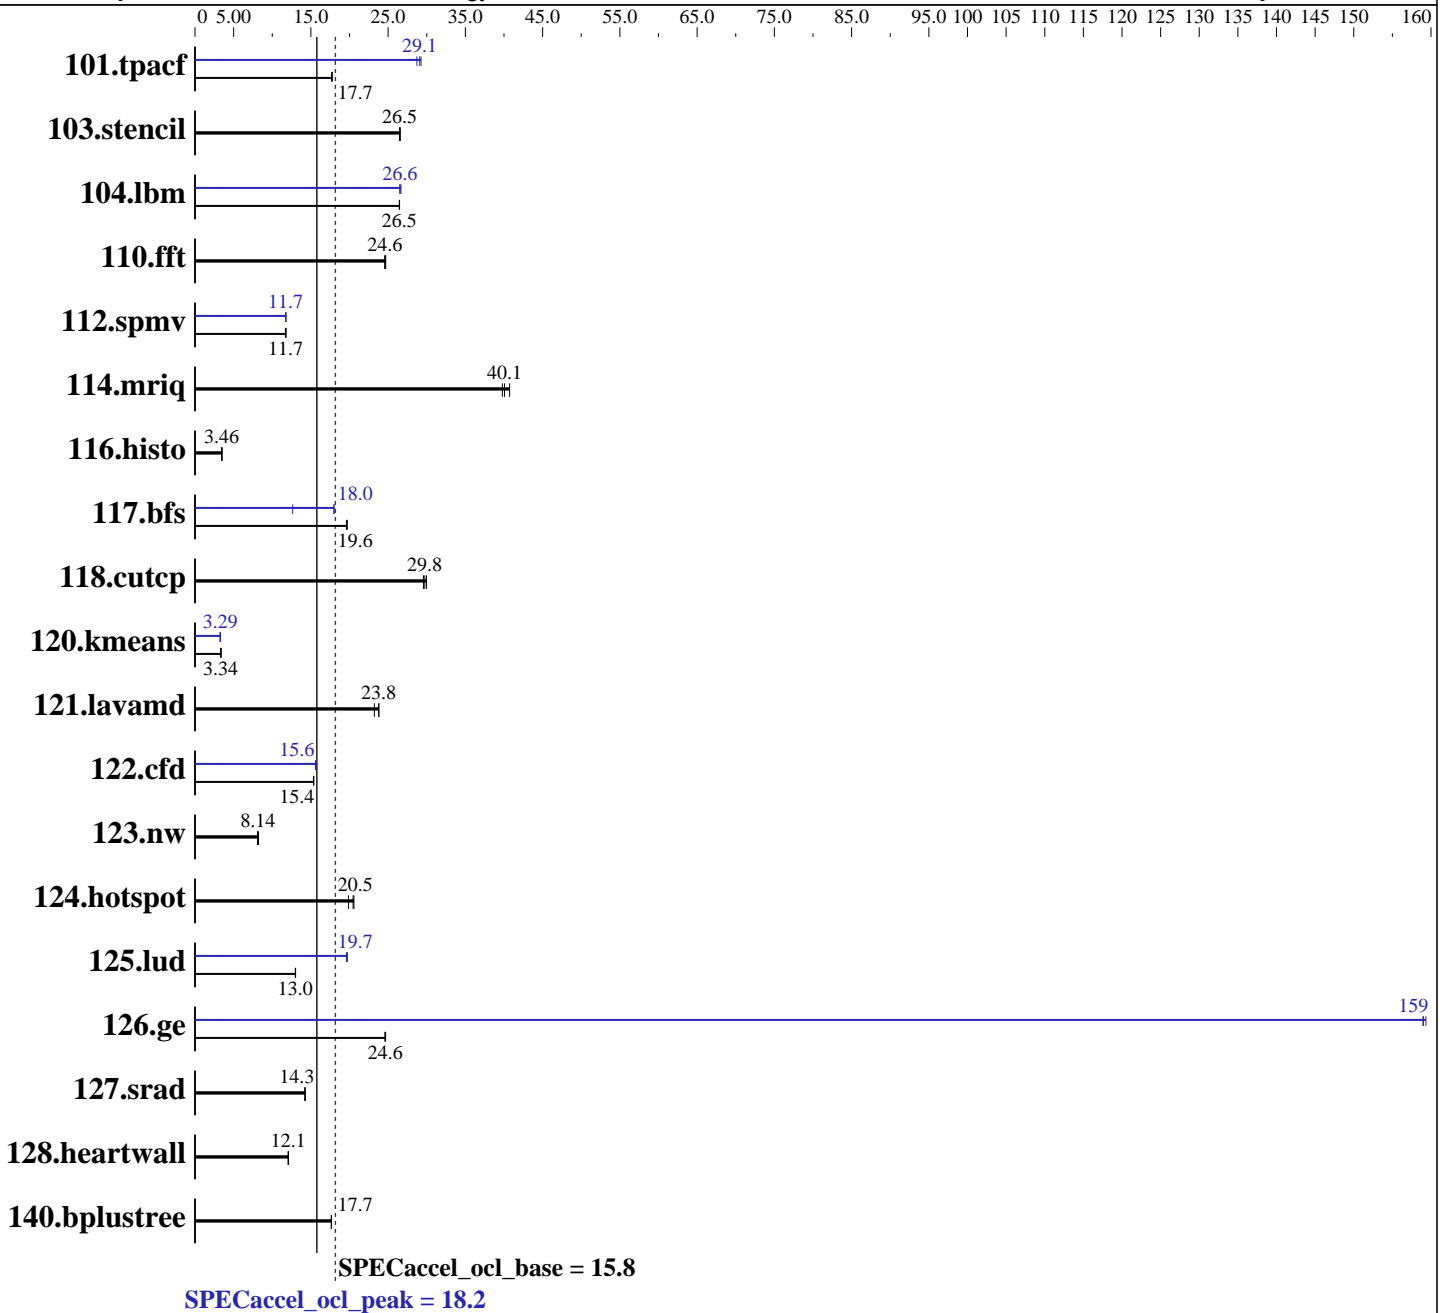



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Hardware

CPU Name: AMD EPYC 7763  
CPU Characteristics: Turbo up to 3.5 GHz  
CPU MHz: 2450  
CPU MHz Maximum: 3500  
FPU: Integrated  
CPU(s) enabled: 64 cores, 2 chips, 64 cores/chip, 2 threads/core  
CPU(s) orderable: 2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 512 KB I+D on chip per core  
L3 Cache: 256 MB I+D on chip per chip  
32 MB shared / 8 cores  
Other Cache: None  
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)  
Disk Subsystem: 1 x 480 GB 2.5" SSD  
Other Hardware: None

## Accelerator

Accel Model Name: Tesla A100  
Accel Vendor: NVIDIA Corporation  
Accel Name: NVIDIA Tesla A100-PCIE-40GB  
Type of Accel: GPU  
Accel Connection: PCIe 4.0 16x  
Does Accel Use ECC: Yes  
Accel Description: NVIDIA Tesla A100-PCIE-40GB  
Accel Driver: NVIDIA UNIX x86\_64 Kernel Module 450.51.05

## Software

Operating System: Red Hat Enterprise Linux release 8.3 (Ootpa)  
4.18.0-240.el8.x86\_64  
Compiler: Nvidia HPC SDK Release 20.11  
File System: xfs  
System State: Run level 3  
Other Software: CUDA 11.0 SDK



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
101.tpacf	6.02	17.8	6.04	17.7	<b>6.04</b>	<b>17.7</b>	3.73	28.7	3.66	29.3	<b>3.68</b>	<b>29.1</b>
103.stencil	4.71	26.6	4.72	26.5	<b>4.71</b>	<b>26.5</b>	4.71	26.6	4.72	26.5	<b>4.71</b>	<b>26.5</b>
104.lbm	4.23	26.5	4.24	26.4	<b>4.23</b>	<b>26.5</b>	4.20	26.7	4.22	26.5	<b>4.22</b>	<b>26.6</b>
110.fft	4.50	24.7	<b>4.51</b>	<b>24.6</b>	4.52	24.6	4.50	24.7	<b>4.51</b>	<b>24.6</b>	4.52	24.6
112.spmv	<b>12.5</b>	<b>11.7</b>	12.5	11.8	12.6	11.7	<b>12.5</b>	<b>11.7</b>	12.5	11.7	12.5	11.8
114.mriq	<b>2.72</b>	<b>40.1</b>	2.74	39.8	2.68	40.7	<b>2.72</b>	<b>40.1</b>	2.74	39.8	2.68	40.7
116.histo	<b>32.9</b>	<b>3.46</b>	32.5	3.51	33.2	3.44	<b>32.9</b>	<b>3.46</b>	32.5	3.51	33.2	3.44
117.bfs	5.94	19.7	5.97	19.6	<b>5.96</b>	<b>19.6</b>	<b>6.51</b>	<b>18.0</b>	9.25	12.6	6.50	18.0
118.cutcp	<b>3.33</b>	<b>29.8</b>	3.35	29.6	3.30	30.0	<b>3.33</b>	<b>29.8</b>	3.35	29.6	3.30	30.0
120.kmeans	29.9	3.34	29.5	3.39	<b>29.9</b>	<b>3.34</b>	30.9	3.23	<b>30.4</b>	<b>3.29</b>	30.4	3.29
121.lavamd	4.58	23.8	4.69	23.2	<b>4.58</b>	<b>23.8</b>	4.58	23.8	4.69	23.2	<b>4.58</b>	<b>23.8</b>
122.cfd	8.20	15.4	8.21	15.3	<b>8.20</b>	<b>15.4</b>	8.07	15.6	8.02	15.7	<b>8.06</b>	<b>15.6</b>
123.nw	<b>14.1</b>	<b>8.14</b>	14.0	8.22	14.2	8.09	<b>14.1</b>	<b>8.14</b>	14.0	8.22	14.2	8.09
124.hotspot	5.54	20.6	<b>5.57</b>	<b>20.5</b>	5.74	19.9	5.54	20.6	<b>5.57</b>	<b>20.5</b>	5.74	19.9
125.lud	9.14	13.0	<b>9.15</b>	<b>13.0</b>	9.16	13.0	6.04	19.7	6.07	19.6	<b>6.05</b>	<b>19.7</b>
126.ge	<b>6.30</b>	<b>24.6</b>	6.30	24.6	6.28	24.7	0.975	159	<b>0.975</b>	<b>159</b>	0.973	159
127.srad	<b>8.00</b>	<b>14.3</b>	8.00	14.3	8.01	14.2	<b>8.00</b>	<b>14.3</b>	8.00	14.3	8.01	14.2
128.heartwall	8.76	12.1	<b>8.76</b>	<b>12.1</b>	8.80	12.0	8.76	12.1	<b>8.76</b>	<b>12.1</b>	8.80	12.0
140.bplustree	<b>6.12</b>	<b>17.7</b>	6.12	17.7	6.12	17.7	<b>6.12</b>	<b>17.7</b>	6.12	17.7	6.12	17.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Platform Notes

```
Sysinfo program /home/ACCEL1.3/Docs/sysinfo
$Rev: 6965 $ $Date:: 2015-04-21 #$ c05a7f14b1b1765e3fe1df68447e8a35
running on amd2srh836 Tue Jan 19 10:46:18 2021
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7763 64-Core Processor
```

Continued on next page



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 64
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
cache size : 512 KB

```

From /proc/meminfo

```

MemTotal:      1056412560 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux amd2srh836 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 22 19:12

SPEC is set to: /home/ACCEL1.3

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs       419G     131G   288G   32% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

BIOS Lenovo D8E113S-2.00 12/18/2020

Memory:

32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200 MT/s

(End of data from sysinfo program)

## General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Base Runtime Environment

C benchmarks:

OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 11.0.197

OpenCL Device #0: A100-PCIE-40GB, v 450.51.05

C++ benchmarks:

OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 11.0.197

OpenCL Device #0: A100-PCIE-40GB, v 450.51.05

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgc++

## Base Portability Flags

116.histo: -DSPEC\_LOCAL\_MEMORY\_HEADROOM=1



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Base Optimization Flags

C benchmarks:  
-fast -Mfprelaxed

C++ benchmarks:  
-fast -Mfprelaxed

## Base Other Flags

C benchmarks:  
-I/usr/local/cuda-11.0/targets/x86\_64-linux/include  
-L/usr/local/cuda-11.0/lib64 -lOpenCL

C++ benchmarks:  
-I/usr/local/cuda-11.0/targets/x86\_64-linux/include  
-L/usr/local/cuda-11.0/lib64 -lOpenCL

## Peak Runtime Environment

C benchmarks:  
OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 11.0.197  
OpenCL Device #0: A100-PCIE-40GB, v 450.51.05

C++ benchmarks:  
OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 11.0.197  
OpenCL Device #0: A100-PCIE-40GB, v 450.51.05

## Peak Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgc++

## Peak Portability Flags

116.histo: -DSPEC\_LOCAL\_MEMORY\_HEADROOM=1



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Peak Optimization Flags

C benchmarks:

110.fft: basepeak = yes

114.mriq: basepeak = yes

116.histo: basepeak = yes

117.bfs: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=64  
-DSPEC\_ACCEL\_WG\_SIZE\_1\_0=64

118.cutcp: basepeak = yes

121.lavamd: basepeak = yes

124.hotspot: basepeak = yes

127.srad: basepeak = yes

128.heartwall: basepeak = yes

140.bplustree: basepeak = yes

C++ benchmarks:

101.tpacf: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=1024

103.stencil: basepeak = yes

104.lbm: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=32  
-DSPEC\_ACCEL\_WG\_SIZE\_0\_1=1 -DSPEC\_ACCEL\_WG\_SIZE\_0\_2=1

112.spmv: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=96

120.kmeans: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=288

122.cfd: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_3\_0=288

123.nw: basepeak = yes

125.lud: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=32

126.ge: -fast -Mfprelaxed -DSPEC\_ACCEL\_WG\_SIZE\_0\_0=512  
-DSPEC\_ACCEL\_WG\_SIZE\_1\_0=1 -DSPEC\_ACCEL\_WG\_SIZE\_1\_1=512



# SPEC ACCEL OCL Result

Copyright 2015-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla A100-PCIE-40GB  
ThinkSystem SR665

SPECaccel\_ocl\_peak = 18.2

SPECaccel\_ocl\_base = 15.8

ACCEL license: 28  
Test sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test date: Jan-2021  
Hardware Availability: Mar-2021  
Software Availability: Mar-2021

## Peak Other Flags

### C benchmarks:

```
-I/usr/local/cuda-11.0/targets/x86_64-linux/include  
-L/usr/local/cuda-11.0/lib64 -lOpenCL
```

### C++ benchmarks:

```
-I/usr/local/cuda-11.0/targets/x86_64-linux/include  
-L/usr/local/cuda-11.0/lib64 -lOpenCL
```

The flags file that was used to format this result can be browsed at

[https://www.spec.org/accel/flags/nv2020\\_flags.20210315.html](https://www.spec.org/accel/flags/nv2020_flags.20210315.html)

You can also download the XML flags source by saving the following link:

[https://www.spec.org/accel/flags/nv2020\\_flags.20210315.xml](https://www.spec.org/accel/flags/nv2020_flags.20210315.xml)

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC ACCEL v1.3.  
Report generated on Mon Mar 15 12:04:59 2021 by SPEC ACCEL PS/PDF formatter v1290.  
Originally published on 15 March 2021.