



SPEC® OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13


Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

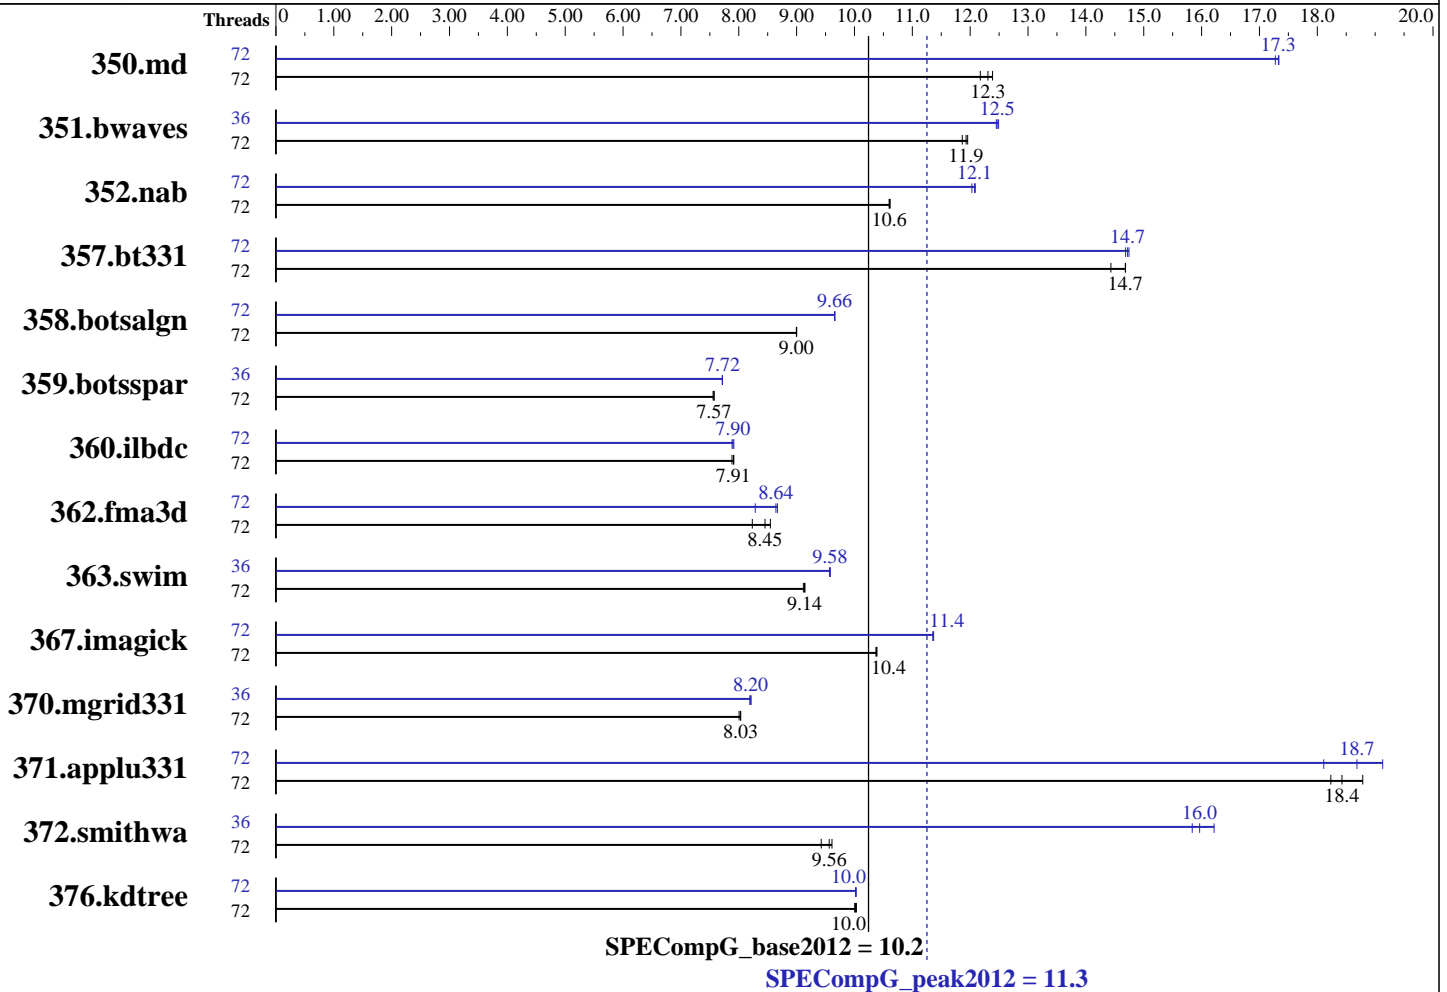

Hardware

CPU Name: Intel Xeon E5-2697 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 CPU MHz Maximum: 3600
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400U-R)
 Disk Subsystem: Panasas ActiveStor 14
 Other Hardware: --
 Base Threads Run: 72
 Minimum Peak Threads: 36

Continued on next page

Software

Operating System: Oracle Linux Server release 6.7, Kernel 3.10.0-229.20.1.el6.x86_64.knl2
 Compiler: C/C++/Fortran: Version 14.0.4.211 of Intel Composer XE for Linux Build 20140805
 C/C++/Fortran: Version 16.0.2.181 of Intel Composer XE for Linux Build 20160204
 Auto Parallel: No
 File System: Linux ext3
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Maximum Peak Threads: 72

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	72	374	12.4	<u>376</u>	<u>12.3</u>	380	12.2	72	268	17.3	267	17.3	<u>267</u>	<u>17.3</u>
351.bwaves	72	<u>380</u>	<u>11.9</u>	379	12.0	382	11.9	36	364	12.5	<u>363</u>	<u>12.5</u>	363	12.5
352.nab	72	<u>367</u>	<u>10.6</u>	366	10.6	367	10.6	72	<u>322</u>	<u>12.1</u>	323	12.0	322	12.1
357.bt331	72	<u>323</u>	<u>14.7</u>	328	14.4	323	14.7	72	323	14.7	<u>322</u>	<u>14.7</u>	321	14.7
358.botsalgn	72	<u>484</u>	<u>9.00</u>	484	9.00	483	9.00	72	450	9.66	<u>450</u>	<u>9.66</u>	450	9.66
359.botsspar	72	693	7.57	<u>693</u>	<u>7.57</u>	695	7.56	36	681	7.71	680	7.72	<u>680</u>	<u>7.72</u>
360.ilbdc	72	450	7.92	<u>450</u>	<u>7.91</u>	452	7.88	72	450	7.91	452	7.88	<u>451</u>	<u>7.90</u>
362.fma3d	72	<u>449</u>	<u>8.45</u>	445	8.55	461	8.23	72	438	8.67	<u>440</u>	<u>8.64</u>	459	8.29
363.swim	72	497	9.12	<u>496</u>	<u>9.14</u>	495	9.14	36	473	9.58	473	9.57	<u>473</u>	<u>9.58</u>
367.imagick	72	<u>677</u>	<u>10.4</u>	677	10.4	678	10.4	72	<u>619</u>	<u>11.4</u>	619	11.4	618	11.4
370.mgrid331	72	550	8.03	552	8.01	<u>550</u>	<u>8.03</u>	36	540	8.19	<u>539</u>	<u>8.20</u>	538	8.21
371.applu331	72	<u>329</u>	<u>18.4</u>	332	18.2	323	18.8	72	<u>324</u>	<u>18.7</u>	317	19.1	335	18.1
372.smithwa	72	569	9.43	<u>560</u>	<u>9.56</u>	558	9.61	36	331	16.2	338	15.8	<u>336</u>	<u>16.0</u>
376.kdtree	72	450	10.0	448	10.0	<u>449</u>	<u>10.0</u>	72	449	10.0	449	10.0	<u>449</u>	<u>10.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

```
Sysinfo program /panfs/projects/innl/aknyazel/OMP2012/1.0/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 $# 8f8c0fe9e19c658963ale67685e50647
running on ewb261 Sun Mar 13 01:46:38 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```
From /proc/meminfo
MemTotal:      131920288 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Oracle Linux Server release 6.7
```

```
From /etc/*release* /etc/*version*
oracle-release: Oracle Linux Server release 6.7
os-release:
NAME="Oracle Linux Server"
VERSION="6.7"
ID="ol"
VERSION_ID="6.7"
PRETTY_NAME="Oracle Linux Server 6.7"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:oracle:linux:6:7:server"
HOME_URL="https://linux.oracle.com/"
redhat-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
system-release: Oracle Linux Server release 6.7
system-release-cpe: cpe:/o:oracle:linux:6:7:server
```

```
uname -a:
Linux ewb261 3.10.0-229.20.1.el6.x86_64.knl2 #2 SMP Tue Dec 8 22:27:38 MST
2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 10 14:13
```

```
SPEC is set to: /panfs/projects/innl/aknyazel/OMP2012/1.0
Filesystem      Type      Size  Used Avail Use% Mounted on
panfs://36.101.211.31/projects
panfs           78T      63T   16T   81% /panfs/projects
```

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

General Notes

```
=====
General base OMP Library Settings
ENV_KMP_AFFINITY=compact,0
```

```
=====
General peak OMP Library Settings
ENV_KMP_AFFINITY=compact,0
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

General Notes (Continued)

General OMP Library Settings

```
KMP_LIBRARY=turnaround
KMP_STACKSIZE=256M
KMP_BLOCKTIME=infinite
OMP_DYNAMIC=FALSE
OMP_NESTED=FALSE
OMP_SCHEDULE=static
```

Compiler selection proxy script spec{icc/fort/icpc/run} was used:

```
#!/bin/sh
COMPBIN=${BASH_SOURCE[0]:-$0}
COMPBIN=${COMPBIN##*/spec}
version=$1
shift
```

```
COMPILER_ROOT_PATHS="/opt/intel/compiler"
```

```
for COMPILER_ROOT_PATH in $COMPILER_ROOT_PATHS ; do
if [ -e "$COMPILER_ROOT_PATH/${version}/bin/compilervars.sh" ] ; then
. $COMPILER_ROOT_PATH/${version}/bin/compilervars.sh intel64
break
fi
done
```

```
exec $COMPBIN "$@"
for specrun last line is
exec "$@"
```

Compiler for base and most peak: C/C++/Fortran: Version 14.0.4.211 of Intel Composer XE for Linux Build 20140805
Compiler for some peak components (where 2016u2 is specified): C/C++/Fortran: Version 16.0.2.181 of Intel Composer XE for Linux Build 20160204

```
351.bwaves:peak:
ENV_KMP_AFFINITY=compact,1
ENV_OMP_SCHEDULE=static,1
```

```
359.botsspar:peak:
ENV_KMP_AFFINITY=compact,1
ENV_OMP_SCHEDULE=guided
```

```
363.swim:peak:
ENV_KMP_AFFINITY=compact,1
```

```
370.mgrid331:peak:
ENV_KMP_AFFINITY=compact,1
```

```
372.smithwa:peak:
ENV_OMP_SCHEDULE=static,1
```



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Base Compiler Invocation

C benchmarks:
specicc 2013_sp1.4.211

C++ benchmarks:
specicpc 2013_sp1.4.211

Fortran benchmarks:
specifort 2013_sp1.4.211

Base Portability Flags

350.md: -FR
357.bt331: -mmodel=medium
363.swim: -mmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O3 -openmp -ipo -xCORE-AVX2 -ansi-alias

C++ benchmarks:
-O3 -openmp -ipo -xCORE-AVX2 -ansi-alias

Fortran benchmarks:
-O3 -openmp -ipo -xCORE-AVX2 -align array64byte

Peak Compiler Invocation

C benchmarks (except as noted below):
specicc 2016u2

359.botsspar: specicc 2013_sp1.4.211

372.smithwa: specicc 2013_sp1.4.211

C++ benchmarks:
specicpc 2013_sp1.4.211

Fortran benchmarks (except as noted below):
specifort 2013_sp1.4.211

350.md: specifort 2016u2

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Peak Compiler Invocation (Continued)

371.applu331: specifort 2016u2

Peak Portability Flags

350.md: -FR
357.bt331: -mcmmodel=medium
363.swim: -mcmmodel=medium
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -opt-calloc -fp-model fast=2
-no-prec-div -no-prec-sqrt -ansi-alias
358.botsalgn: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias
359.botsspar: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias
367.imagick: -O3 -qopenmp -ipo -xCORE-AVX2 -ansi-alias
372.smithwa: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=1
-ansi-alias

C++ benchmarks:

-O3 -openmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias

Fortran benchmarks:

350.md: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -fp-model fast=2 -no-prec-div
-no-prec-sqrt -align array64byte
351.bwaves: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -fp-model fast=2
-no-prec-div -no-prec-sqrt -align array64byte
357.bt331: Same as 351.bwaves
360.ilbdc: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-align array64byte
362.fma3d: Same as 360.ilbdc

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Endeavour Node, Intel Xeon E5-2697 v4, 2.3GHz, DDR4-2400 MHz,SMT ON Turbo ON)

SPECompG_peak2012 = 11.3

SPECompG_base2012 = 10.2

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Peak Optimization Flags (Continued)

363.swim: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=3
-align array64byte

370.mgrid331: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=3 -align array64byte

371.aplu331: -O3 -qopenmp -ipo -xCORE-AVX2 -align array64byte

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20160331.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20160331.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.
Report generated on Thu Mar 31 11:10:11 2016 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 31 March 2016.