SPECsfs97 Result

© Copyright 1997-2001 Standard Performance Evaluation Corporation

Hewlett Packard
HP surestore NAS VA 105J

SPECsfs97_R1.v2 =

14044 Ops/Sec (Overall Response Time = 2.70 msec)

Tested:	Oct 2001	By:	Hewlett Packard	License #:	3	Hardware Avail:	Oct 2001	Software Avail:	Oct 2001

Throughput (ops/sec)	Average Response (msec)
1383	0.6
2800	0.8
4221	1.0
5631	1.2
7027	1.6
8437	2.5
9871	3.4
11280	4.3
12614	5.9
14044	**11.4**

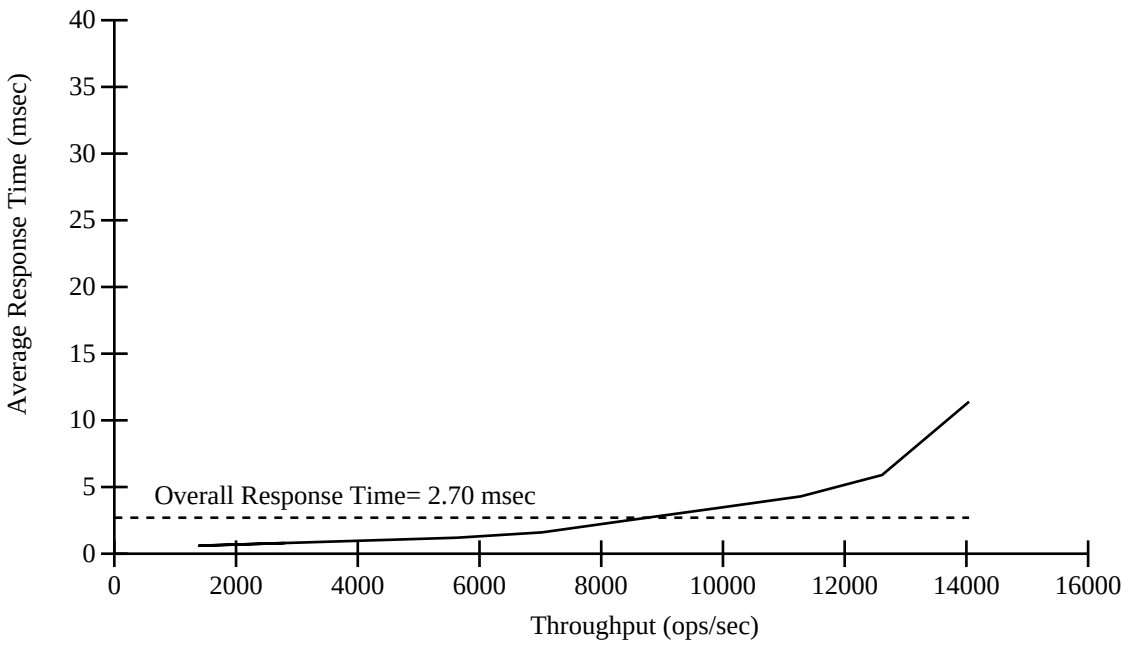

CPU, Memory and Power

Model Name:	HP surestore NAS VA 105J
Processor:	PA-8700@750Mhz
# of Processors:	2
Primary Cache:	750KB Instruction, 1.5MB data on chip
Secondary Cache:	N/A
Other Cache:	N/A
UPS:	N/A
Other Hardware:	Brocade Silkworm 2800 FC switch
Memory Size:	16 GB
NVRAM Size:	2GB
NVRAM Type:	Double buffered
NVRAM Description:	3-days battery protection

Server Software

OS Name and Version:	HP-UX 11.11
Other Software:	N/A
File System:	JFS
NFS version:	2

Network Subsystem

Network Type:	Gigabit Ethernet
Network Controller Desc.:	PCI 1000Base-SX (A4926A)
Number Networks:	1 (N1)
Number Network Controllers:	2
Protocol Type:	UDP
Switch Type:	HP Procurve Gigabit Switch 4108GL
Bridge Type:	N/A
Hub Type:	N/A
Other Network Hardware:	N/A

Server Tuning

Buffer Cache Size:	Dynamic 40-60% (see notes below)
# NFS Processes:	100
Fileset Size:	134.6 GB

Disk Subsystem

Number Disk Controllers:	3
Number of Disks:	31
Number of Filesystems:	10 (FS01-FS10)
File System Creation Ops:	logsize=2048,bsize=8192,largefiles
File System Config:	See notes below
Disk Controller:	Ultra2 Wide SCSI (builtin)
# of Controller Type:	1
Number of Disks:	1
Disk Type:	Seagate ST39204LC
File Systems on Disks:	OS, swap, dump
Special Config Notes:	N/A
Disk Controller:	PCI Fiber Channel A5158A
# of Controller Type:	1
Number of Disks:	30
Disk Type:	18GB, 15000rpm ST318451FC
File Systems on Disks:	FS01,FS02,FS03,FS04,FS05,FS06...FS10
Special Config Notes:	See notes below ...

For More Information contact

SPEC

info@spec.org
http://www.spec.org/

SPECsfs97 Result

© Copyright 1997-2001 Standard Performance Evaluation Corporation

Hewlett Packard
HP surestore NAS VA 105J

SPECsfs97_R1.v2 =

14044 Ops/Sec (Overall Response Time = 2.70 msec)

Load Generator (LG) Configuration

Number of Load Generators:	4
Number of Processes per LG:	40
Biod Max Read Setting:	2
Biod Max Write Setting:	2
LG Type:	J6000
LG Model:	J6000
Number and Type Processors:	2X PA-8600 @ 551Mhz
Memory Size:	10GB
Operating System:	HP-UX 11.0
Compiler:	HP ANSI C
Compiler Options:	+O2 -Ae
Network Type:	PCI 1000Base-SX Adapter A4926A

Testbed Configuration

LG #	LG Type	Network	Target File Systems	Notes
1	J6000	1	FS01, FS02, FS03,... FS10	N/A
2	J6000	1	FS01, FS02, FS03,... FS10	N/A
3	J6000	1	FS01, FS02, FS03,... FS10	N/A
4	J6000	1	FS01, FS02, FS03,... FS10	N/A

Notes/Tuning Information

Other Notes
-NSTREVENT=1056,NSTRSCHED=16,STRMSGSZ=65535,bufcache_hash_locks=4096
-create_fastlinks=1,dbc_max_pct=60,dbc_min_pct=40,default_disk_ir=1
-dnlc_hash_locks=4096,ftable_hash_locks=4096,max_fcp_reqs=1024
-max_thread_proc=4000,maxdsiz=0XC0000000,maxdsiz_64bit=0X400000000
-maxfiles=2048,maxfiles_lim=2048,maxssiz=0X4FB3000,maxssiz_64bit=0X10000000
-maxswapchunks=16384,maxtsiz=0X40000000,maxtsiz_64bit=0X100000000
-maxuprc=2048,maxusers=128,maxvgs=20,ncallout=4096,ncsize=5000
-nfile=16384,ninode=2000,nkthread=10000,nproc=4096,npty=200,nstrpty=200
-scsi_max_qdepth=32,shmmax=0X40000000,swchunk=16384,vnode_hash_locks=4
-vx_fancyra_enable=1,vx_ninode=1200000
-vxtunefs -o read_pref_io=$bs,read_nstream=10,read_unit_io=$bs,
-write_pref_io=$bs,default_indir_size=$bs,write_unit_io=$bs,
-default_indir_size=$bs,write_nstream=20,max_diskq=104857600,
-max_buf_data_size=8K /FS$i with bs=8192
-One Disk array with 30 disks RAID 0/1 (hardware) with 10 filesystems.
-Each filesystem is striped across 15 disks hardware
-There's 1 FC controller plugged into the Brocade FC switch
-and 2 ports from the Brocade FC switch going to the disk arrays.