SPECsfs97 Result

© Copyright 1997-2004 Standard Performance Evaluation Corporation

ONStor, Inc.
ONStor Bobcat 2260 NAS Gateway / 3PAR InServ S800 Storage Server

SPECsfs97_R1.v3 =
31784 Ops/Sec (Overall Response Time = 1.53 msec)

Tested:	Jul 2005	By:	ONStor, Inc.	License #:	2192	Hardware Avail:	Feb 2005	Software Avail:	Jun 2005

Throughput (ops/sec)	Average Response (msec)
3132	0.6
6229	0.7
9390	0.9
12555	1.2
15735	1.4
18858	1.5
22191	2.0
25226	2.2
28399	2.6
31784	**4.1**

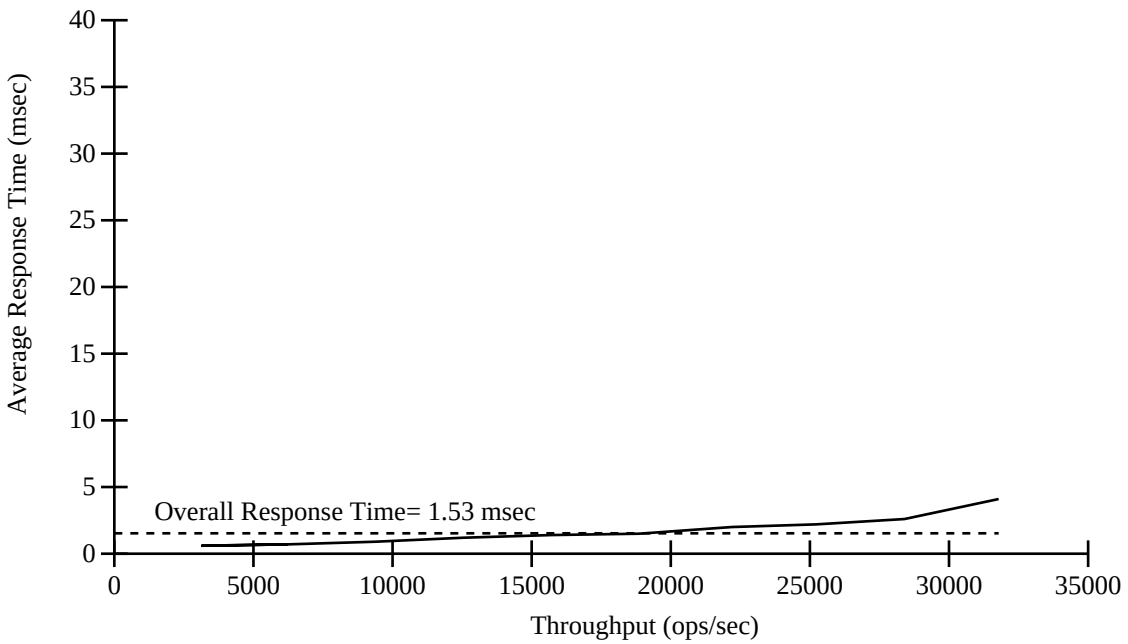

A line in your configuration is too long
or you have too many lines.
Please fix the problem and try again

Server Tuning

Buffer Cache Size:	dynamic
# NFS Processes:	N/A
Fileset Size:	299.8 GB

Disk Subsystem

Number Disk Controllers:	1
Number of Disks:	120
Number of Filesystems:	16
File System Creation Ops:	N/A
File System Config:	TPVV striped across 60 disks (see notes)
Disk Controller:	1 FC controller with 2 ports
# of Controller Type:	1
Number of Disks:	120
Disk Type:	147 GB 10 K RPM - FC disks
File Systems on Disks:	vol401-vol408 and vol501-vol508
Special Config Notes:	N/A

SPECsfs97 Result

© Copyright 1997-2004 Standard Performance Evaluation Corporation

ONStor, Inc.
ONStor Bobcat 2260 NAS Gateway / 3PAR InServ S800 Storage Server

SPECsfs97_R1.v3=
31784 Ops/Sec (Overall Response Time = 1.53 msec)

Load Generator (LG) Configuration

Number of Load Generators:	4
Number of Processes per LG:	32
Biod Max Read Setting:	2
Biod Max Write Setting:	2
LG Type:	LG1
LG Model:	Dell PowerEdge 1850
Number and Type Processors:	Intel(R) dual Xeon(TM) CPU 3.00GHz
Memory Size:	2GB
Operating System:	Red Hat Enterprise Linux ES release 4
Compiler:	pre-compiled binary
Compiler Options:	N/A
Network Type:	1 Gigabit Eth interface

A line in your configuration is too long
or you have too many lines.
Please fix the problem and try again

Notes/Tuning Information

A line in your notes/tuning section is too long or you have too many lines.
Please fix the problem and try again