SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

IBM RS/6000 43P-140

SPECweb96= 459

Test Date : Sep-96

Tested by : IBM Austin, TX

Hardware Avail:	Nov-96	OS Avail:	Nov-96	HTTP Software Avail:	Sep-96	SPEC license #:	11

Throughput ops/sec	Response msec
46	8.6
93	10.2
139	12.1
186	14.6
232	17.2
279	20.1
325	21.5
372	26.3
418	35.4
457	84.9
459	85.4

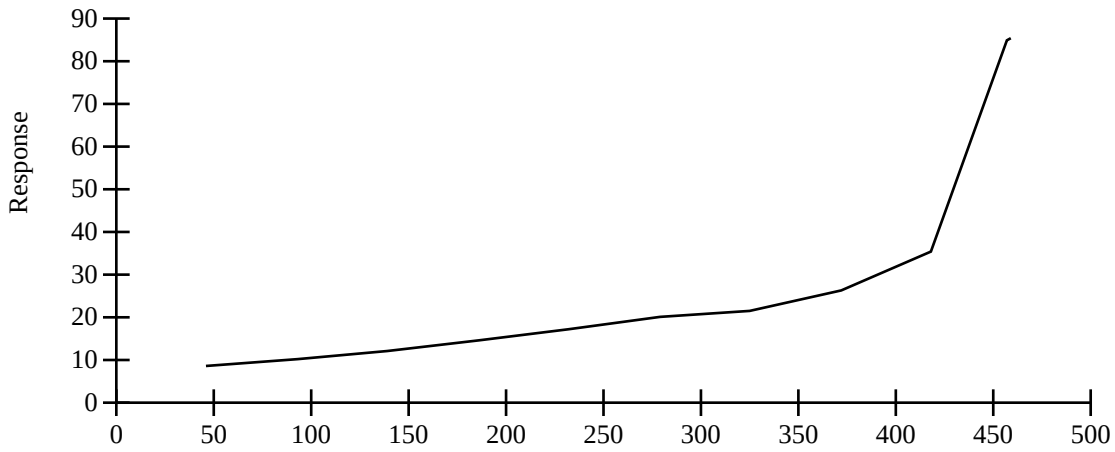

Hardware

Model Name:	RS/6000 43P-140
Processor:	200 Mhz PowerPC 604e
# of Processors:	1
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	1MB(I+D) per cpu
Other Cache:	None
Memory:	448MB
Disk Subsystem:	3 1GB SCSI Disk Drives
Disk Controllers:	Wide SCSI I/O Controller
Other Hardware:	None

Software

Operating System:	AIX 4.1.5
File System:	JFS
Other Software:	None

HTTP Software

Vendor:	Zeus Technology Ltd.
HTTP Software:	Zeus 1.1.3
# of "threads":	1
Server Cache:	-b 922000 -l 8192 -c 3600
Log Mode:	Common Log Format

Network

# of Controllers:	1
Network Controllers:	SK-NET FDDI-FP Network Adapter
# of Nets:	1
Type of Nets:	FDDI
Network Speed:	100 Mbit/sec
Time Wait (secs):	120 (Non RFC1122)

Load Generators

# of Load Generators:	5
# of Processes Each:	8
Model:	3 RS/6000-43P and 2 RS/6000-F30
Processor:	133 MHz 604
# of CPUs:	1
Memory:	64MB - 96 MB
OS:	AIX 4.1.4 and AIX 4.2
Compiler:	IBM Cset++ Version 3.1.3

Benchmark Configuration

Max Requested Load:	460
Max Fileset Size (MB):	468

Notes/Tuning Information

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@specbench.org
http://www.specbench.org/