SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon E5450, 3.00 GHz)

SPECint®_rate2006 = 133

SPECint_rate_base2006 = 122

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

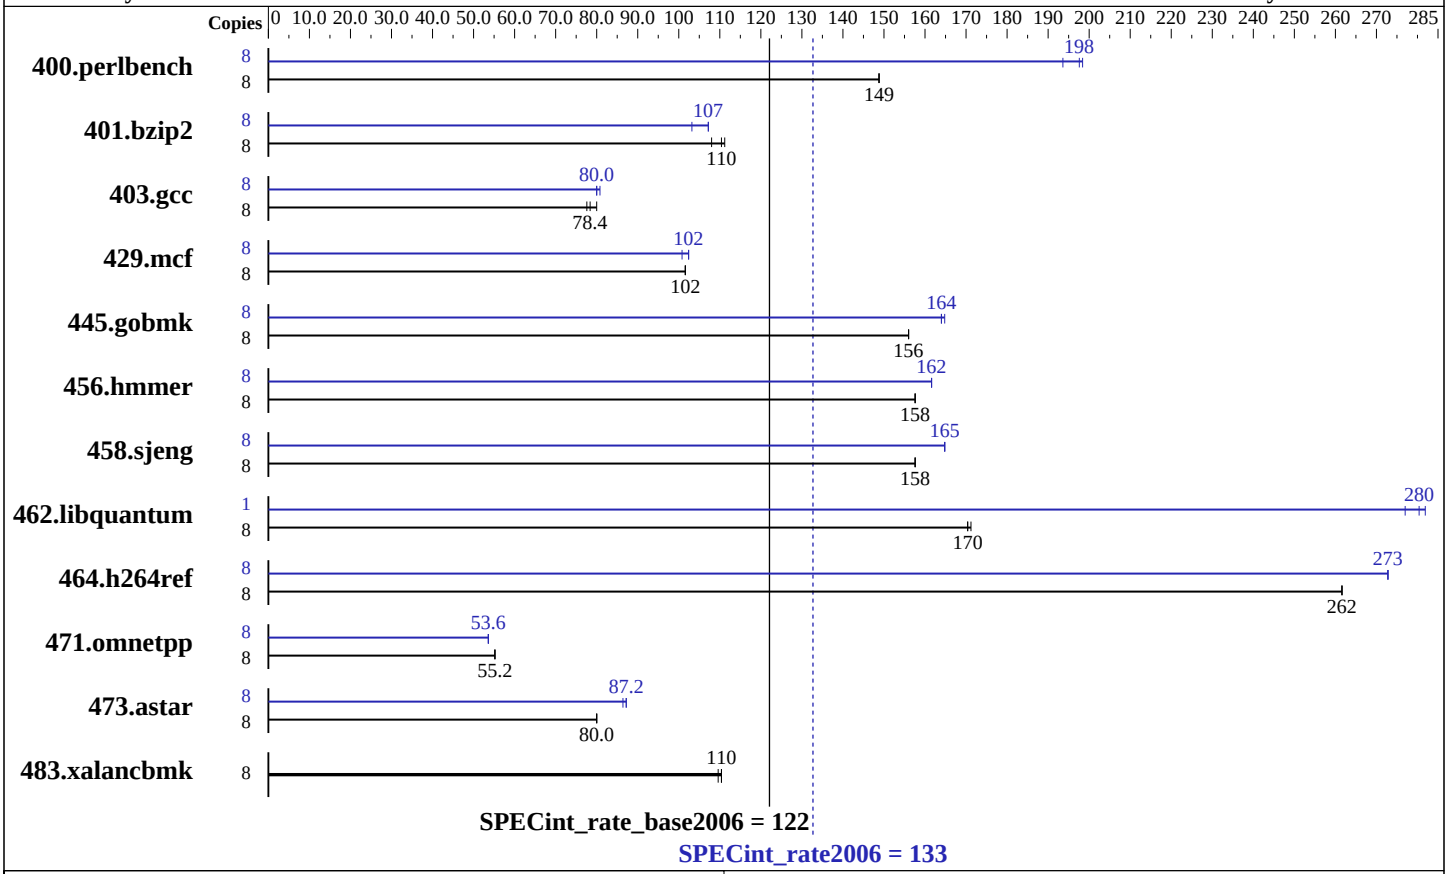

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	1333 MHz Bus Speed
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4x4 GB DDR2-667 FB-DIMM, CL5)
Disk Subsystem:	1 x 320 GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Vista Business SP1 (64-bit)
Compiler:	Intel C++ Compiler for IA-32, Version 11.0 Build 20080930 Package ID: w_cproc_p_11.0.061 Microsoft Visual Studio 2008 SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon E5450, 3.00 GHz)

SPECint_rate2006 = 133

SPECint_rate_base2006 = 122

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**526**	**149**	526	149	525	149	8	**396**	**198**	394	198	404	194
401.bzip2	8	692	111	714	108	**700**	**110**	8	718	107	**720**	**107**	751	103
403.gcc	8	832	77.6	802	80.0	**820**	**78.4**	8	808	80.0	**808**	**80.0**	801	80.8
429.mcf	8	720	102	718	102	**719**	**102**	8	**715**	**102**	723	101	714	102
445.gobmk	8	**537**	**156**	538	156	537	156	8	510	165	511	164	**511**	**164**
456.hmmer	8	473	158	**473**	**158**	474	158	8	463	162	**463**	**162**	462	162
458.sjeng	8	615	158	**614**	**158**	614	158	8	587	165	**587**	**165**	587	165
462.libquantum	8	**971**	**170**	969	171	972	170	1	74.8	277	73.5	282	**73.9**	**280**
464.h264ref	8	**677**	**262**	677	262	677	262	8	650	273	**650**	**273**	649	273
471.omnetpp	8	**911**	**55.2**	908	55.2	912	55.2	8	928	53.6	933	53.6	**930**	**53.6**
473.astar	8	700	80.0	705	80.0	**701**	**80.0**	8	**647**	**87.2**	646	87.2	649	86.4
483.xalancbmk	8	502	110	499	110	**501**	**110**	8	502	110	499	110	**501**	**110**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000

403.gcc: -Qprof_gen(pass 1) -QxSSE4.1 -Qprof_use(pass 2) -Qipo -O3
-Qprec-div- /F512000000

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000

464.h264ref: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon E5450, 3.00 GHz)

SPECint_rate2006 = 133

SPECint_rate_base2006 = 122

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:50:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2009.