



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon X5560, 2.80 GHz

SPECint®2006 = 34.2

SPECint_base2006 = 30.7

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

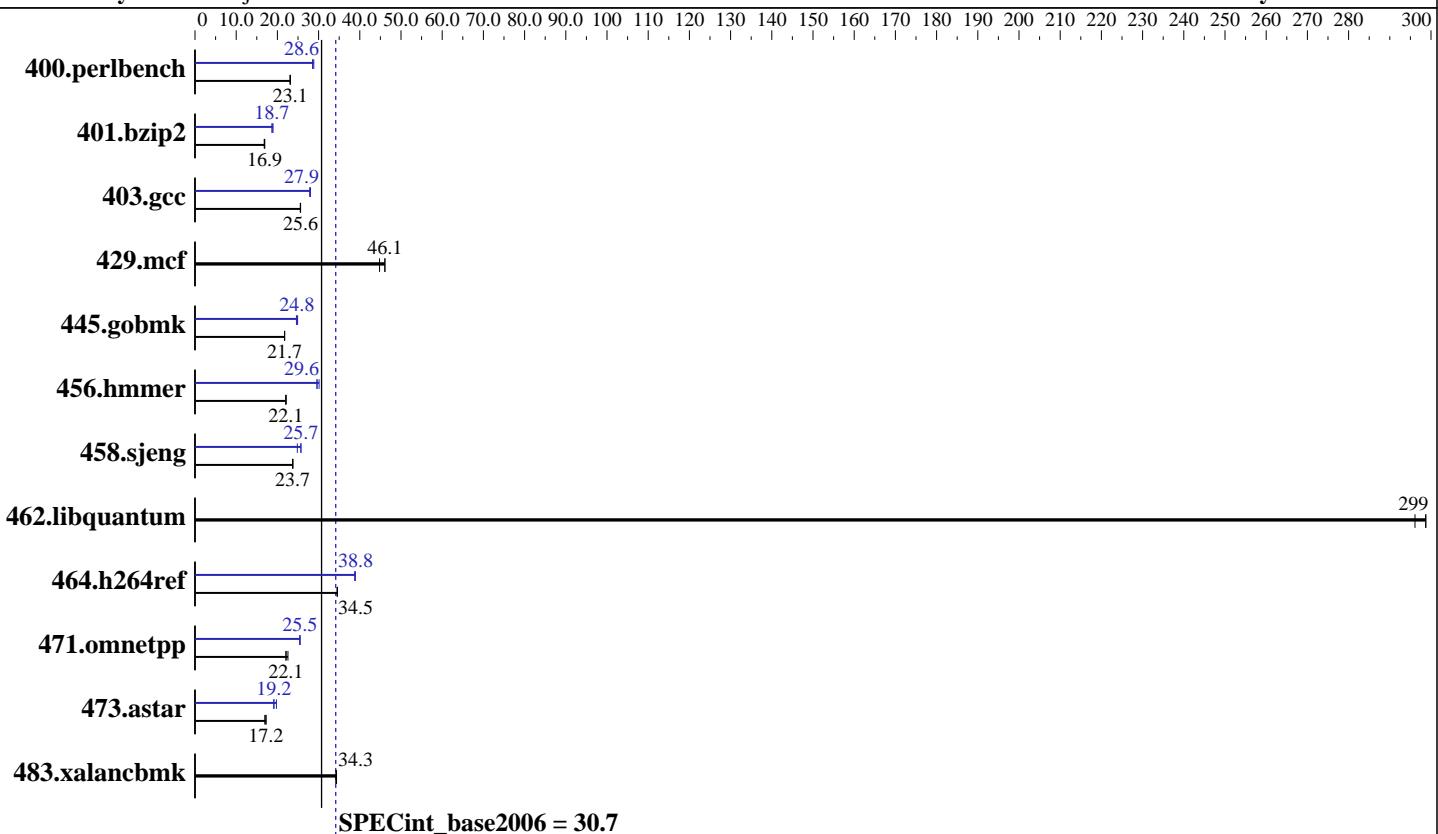

Hardware

CPU Name: Intel Xeon X5560
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6x8 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel: Yes
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon X5560, 2.80 GHz

SPECint2006 = 34.2

SPECint_base2006 = 30.7

CPU2006 license: 19

Test date: Sep-2009

Test sponsor: Fujitsu

Hardware Availability: Jun-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	422	23.1	423	23.1	423	23.1	342	28.6	342	28.6	339	28.8
401.bzip2	574	16.8	570	16.9	571	16.9	516	18.7	516	18.7	509	18.9
403.gcc	314	25.6	315	25.6	314	25.6	288	27.9	289	27.9	287	28.0
429.mcf	204	44.8	198	46.1	198	46.1	204	44.8	198	46.1	198	46.1
445.gobmk	482	21.7	482	21.8	482	21.7	426	24.6	424	24.8	421	24.9
456.hmmer	423	22.1	422	22.1	423	22.1	310	30.1	315	29.6	315	29.6
458.sjeng	511	23.7	510	23.7	510	23.7	487	24.8	471	25.7	470	25.7
462.libquantum	70.0	296	69.4	299	69.4	299	70.0	296	69.4	299	69.4	299
464.h264ref	640	34.6	641	34.5	641	34.5	570	38.8	570	38.8	569	38.9
471.omnetpp	283	22.1	277	22.6	283	22.1	245	25.5	245	25.5	245	25.5
473.astar	407	17.2	408	17.2	414	16.9	355	19.8	367	19.1	366	19.2
483.xalancbmk	202	34.2	201	34.4	201	34.3	202	34.2	201	34.4	201	34.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores

KMP_AFFINITY set to granularity=fine,scatter

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon X5560, 2.80 GHz

SPECint2006 = 34.2

CPU2006 license: 19

Test date: Sep-2009

Test sponsor: Fujitsu

Hardware Availability: Jun-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon X5560, 2.80 GHz

SPECint2006 = 34.2

CPU2006 license: 19

Test date: Sep-2009

Test sponsor: Fujitsu

Hardware Availability: Jun-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
                -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
                -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
                -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
                -prof-use(pass 2) -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
                -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
                -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
                -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
                -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon X5560, 2.80 GHz

SPECint2006 = 34.2

SPECint_base2006 = 30.7

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091013.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091013.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:34:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 October 2009.