



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 123

Servidor Itautec LX114 (Intel Xeon X3450)

SPECint_rate_base2006 = 116

CPU2006 license: 9001


Test date: Mar-2011

Test sponsor: Itautec

Hardware Availability: Feb-2011

Tested by: Itautec

Software Availability: Jan-2011

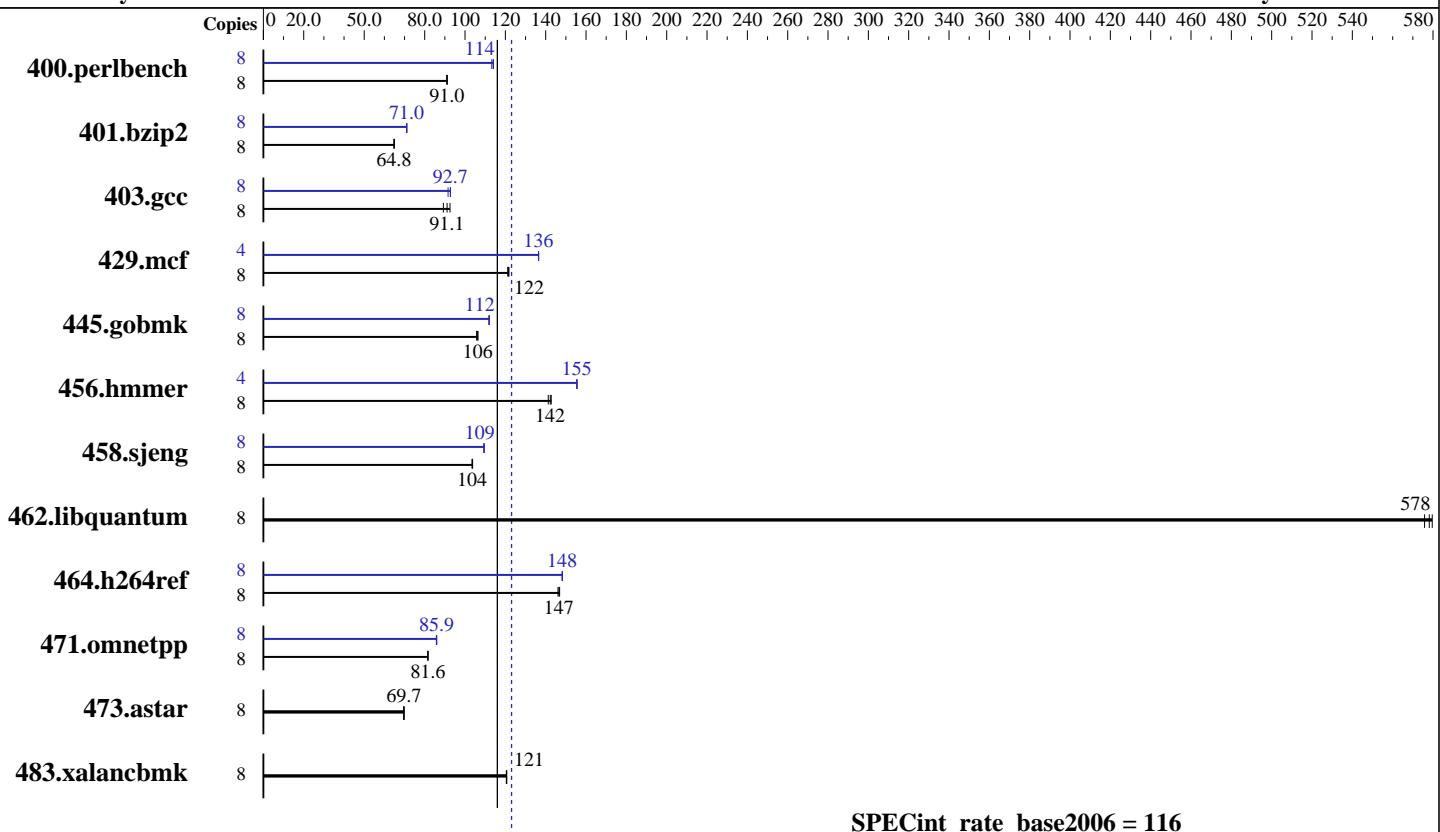

SPECint_rate_base2006 = 116

SPECint_rate2006 = 123

Hardware

CPU Name: Intel Xeon X3450
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2667
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB 2Rx8 PC3-10600U-9, ECC)
Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.2 Build 20110112
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 123

Servidor Itautech LX114 (Intel Xeon X3450)

SPECint_rate_base2006 = 116

CPU2006 license: 9001

Test date: Mar-2011

Test sponsor: Itautech

Hardware Availability: Feb-2011

Tested by: Itautech

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	857	91.2	859	91.0	859	91.0	8	690	113	686	114	685	114
401.bzip2	8	1189	64.9	1191	64.8	1192	64.8	8	1085	71.2	1087	71.0	1087	71.0
403.gcc	8	707	91.1	722	89.3	696	92.5	8	695	92.7	703	91.6	694	92.8
429.mcf	8	599	122	602	121	600	122	4	267	136	267	137	267	136
445.gobmk	8	790	106	789	106	794	106	8	750	112	750	112	749	112
456.hammer	8	525	142	523	143	528	141	4	240	155	240	156	240	155
458.sjeng	8	935	104	933	104	935	104	8	884	109	884	109	885	109
462.libquantum	8	287	578	288	576	286	580	8	287	578	288	576	286	580
464.h264ref	8	1212	146	1208	147	1205	147	8	1194	148	1195	148	1194	148
471.omnetpp	8	613	81.6	613	81.6	612	81.6	8	583	85.8	582	86.0	582	85.9
473.astar	8	805	69.8	807	69.6	806	69.7	8	805	69.8	807	69.6	806	69.7
483.xalancbmk	8	457	121	458	120	458	121	8	457	121	458	120	458	121

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

General Notes

This result was measured on the Servidor Itautech LX114.
The Servidor Itautech LX103, Servidor Itautech LX113 and the Servidor Itautech LX114
are electronically equivalent.

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

Servidor Itautech LX114 (Intel Xeon X3450)

SPECint_rate2006 = 123

CPU2006 license: 9001

Test sponsor: Itautech

Tested by: Itautech

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 123

Servidor Itaute LX114 (Intel Xeon X3450)

SPECint_rate_base2006 = 116

CPU2006 license: 9001

Test date: Mar-2011

Test sponsor: Itaute

Hardware Availability: Feb-2011

Tested by: Itaute

Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 123

Servidor Itaute LX114 (Intel Xeon X3450)

SPECint_rate_base2006 = 116

CPU2006 license: 9001

Test date: Mar-2011

Test sponsor: Itaute

Hardware Availability: Feb-2011

Tested by: Itaute

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>
<http://www.spec.org/cpu2006/flags/Itaute-Intel-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>
<http://www.spec.org/cpu2006/flags/Itaute-Intel-Platform-Settings.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:30:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.