



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®2006 = 46.8**

PRIMERGY RX100 S7, Intel Xeon E3-1230, 3.20 GHz

**SPECint\_base2006 = 44.3**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

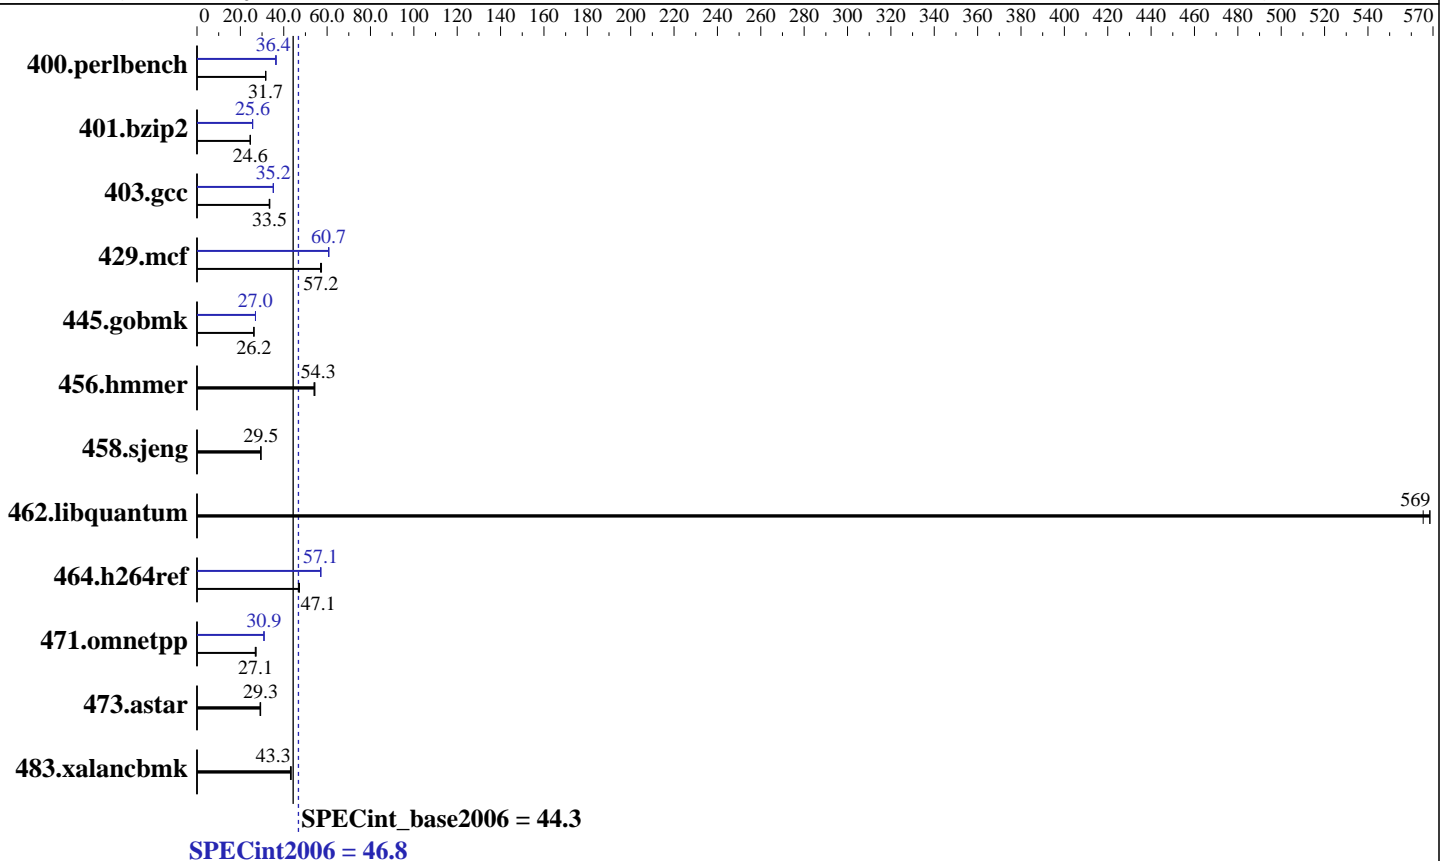

**Hardware**

CPU Name: Intel Xeon E3-1230  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
 Disk Subsystem: 1 x SATA, 300 GB, 7200 RPM  
 Other Hardware: --

**Software**

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint2006 = 46.8

PRIMERGY RX100 S7, Intel Xeon E3-1230, 3.20 GHz

SPECint\_base2006 = 44.3

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	308	31.7	<b>308</b>	<b>31.7</b>	309	31.6	268	36.5	<b>269</b>	<b>36.4</b>	269	36.4
401.bzip2	393	24.5	392	24.6	<b>392</b>	<b>24.6</b>	377	25.6	<b>376</b>	<b>25.6</b>	376	25.7
403.gcc	240	33.5	242	33.3	<b>240</b>	<b>33.5</b>	<b>229</b>	<b>35.2</b>	228	35.2	229	35.2
429.mcf	<b>159</b>	<b>57.2</b>	160	57.0	159	57.4	150	60.7	<b>150</b>	<b>60.7</b>	150	60.8
445.gobmk	<b>400</b>	<b>26.2</b>	400	26.3	400	26.2	<b>389</b>	<b>27.0</b>	389	27.0	389	27.0
456.hammer	172	54.3	173	54.0	<b>172</b>	<b>54.3</b>	172	54.3	173	54.0	<b>172</b>	<b>54.3</b>
458.sjeng	412	29.4	410	29.5	<b>410</b>	<b>29.5</b>	412	29.4	410	29.5	<b>410</b>	<b>29.5</b>
462.libquantum	36.6	565	<b>36.4</b>	<b>569</b>	36.4	569	36.6	565	<b>36.4</b>	<b>569</b>	36.4	569
464.h264ref	473	46.8	<b>470</b>	<b>47.1</b>	469	47.2	387	57.1	<b>388</b>	<b>57.1</b>	388	57.0
471.omnetpp	233	26.9	229	27.2	<b>231</b>	<b>27.1</b>	202	30.9	<b>202</b>	<b>30.9</b>	202	30.9
473.astar	239	29.3	242	29.1	<b>239</b>	<b>29.3</b>	239	29.3	242	29.1	<b>239</b>	<b>29.3</b>
483.xalancbmk	160	43.1	<b>159</b>	<b>43.3</b>	159	43.4	160	43.1	<b>159</b>	<b>43.3</b>	159	43.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS configuration:  
Intel HT Technology = Disable

## General Notes

OMP\_NUM\_THREADS set to number of cores  
For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 46.8**

PRIMERGY RX100 S7, Intel Xeon E3-1230, 3.20 GHz

**SPECint\_base2006 = 44.3**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 46.8**

PRIMERGY RX100 S7, Intel Xeon E3-1230, 3.20 GHz

**SPECint\_base2006 = 44.3**

CPU2006 license: 19

Test date: Apr-2011

Test sponsor: Fujitsu

Hardware Availability: Jun-2011

Tested by: Fujitsu

Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

456.hmmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: basepeak = yes

458.sjeng: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 46.8**

PRIMERGY RX100 S7, Intel Xeon E3-1230, 3.20 GHz

**SPECint\_base2006 = 44.3**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Apr-2011  
**Hardware Availability:** Jun-2011  
**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Intel-Linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Intel-Linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 20:31:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2011.