



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 121**

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate\_base2006 = 117**

CPU2006 license: 55


**Test date:** Apr-2011

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

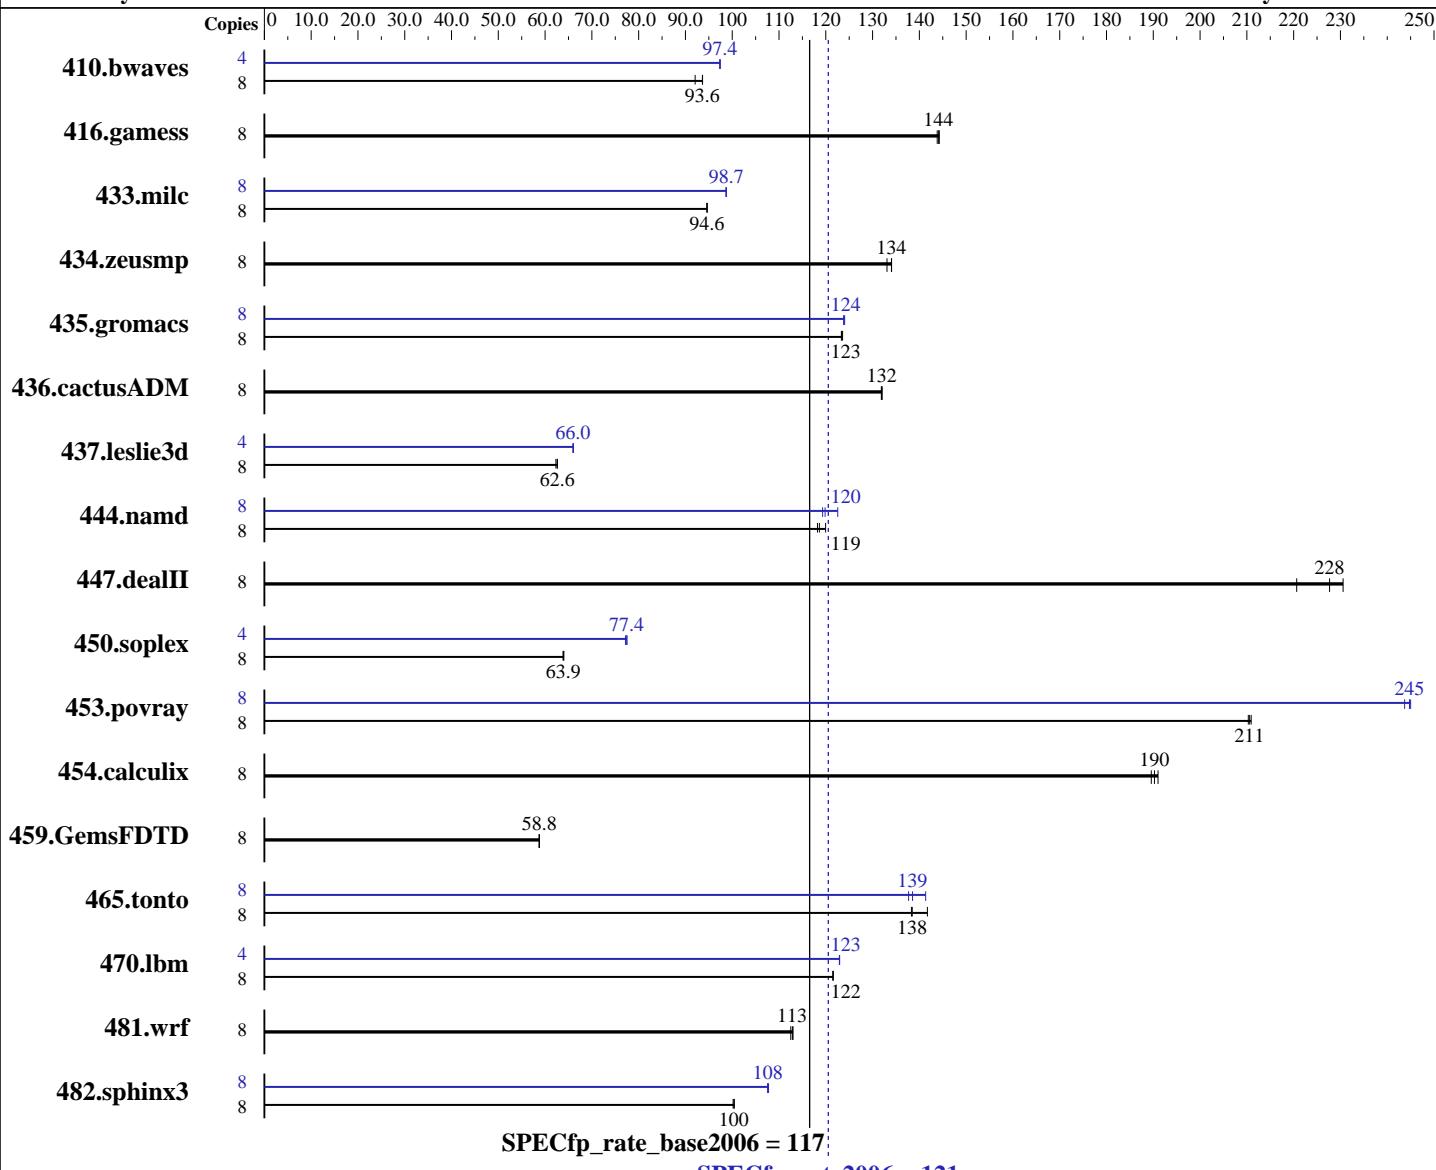

## Hardware

CPU Name: Intel Xeon E3-1280  
CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
CPU MHz: 3500  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 121**

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate\_base2006 = 117**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB 2Rx8 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1181	92.1	1161	93.7	<b>1161</b>	<b>93.6</b>	4	<b>558</b>	<b>97.4</b>	558	97.4	558	97.3
416.gamess	8	<b>1087</b>	<b>144</b>	1089	144	1086	144	8	<b>1087</b>	<b>144</b>	1089	144	1086	144
433.milc	8	<b>776</b>	<b>94.6</b>	776	94.6	776	94.6	8	<b>744</b>	<b>98.7</b>	<b>744</b>	<b>98.7</b>	744	98.7
434.zeusmp	8	<b>543</b>	<b>134</b>	547	133	543	134	8	<b>543</b>	<b>134</b>	547	133	543	134
435.gromacs	8	463	123	<b>463</b>	<b>123</b>	462	124	8	<b>461</b>	<b>124</b>	461	124	461	124
436.cactusADM	8	724	132	<b>725</b>	<b>132</b>	725	132	8	724	132	<b>725</b>	<b>132</b>	725	132
437.leslie3d	8	<b>1201</b>	<b>62.6</b>	1201	62.6	1207	62.3	4	<b>570</b>	<b>66.0</b>	569	66.1	<b>570</b>	<b>66.0</b>
444.namd	8	<b>541</b>	<b>119</b>	535	120	543	118	8	524	123	<b>535</b>	<b>120</b>	538	119
447.dealII	8	397	231	<b>402</b>	<b>228</b>	415	221	8	397	231	<b>402</b>	<b>228</b>	415	221
450.soplex	8	1042	64.0	<b>1044</b>	<b>63.9</b>	1045	63.9	4	430	77.5	432	77.2	<b>431</b>	<b>77.4</b>
453.povray	8	<b>202</b>	<b>211</b>	202	211	202	210	8	175	244	<b>174</b>	<b>245</b>	174	245
454.calculix	8	<b>347</b>	<b>190</b>	348	190	346	191	8	<b>347</b>	<b>190</b>	348	190	346	191
459.GemsFDTD	8	<b>1444</b>	<b>58.8</b>	1444	58.8	1445	58.7	8	<b>1444</b>	<b>58.8</b>	1444	58.8	1445	58.7
465.tonto	8	555	142	569	138	<b>568</b>	<b>138</b>	8	557	141	<b>568</b>	<b>139</b>	572	138
470.lbm	8	<b>904</b>	<b>122</b>	904	122	904	122	4	447	123	447	123	<b>447</b>	<b>123</b>
481.wrf	8	<b>792</b>	<b>113</b>	794	113	791	113	8	<b>792</b>	<b>113</b>	794	113	791	113
482.sphinx3	8	<b>1553</b>	<b>100</b>	1556	100	1552	100	8	<b>1447</b>	108	<b>1449</b>	<b>108</b>	1449	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 3600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 121**

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate\_base2006 = 117**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

Binaries were compiled on RHEL5.5

The Dell PowerEdge R210 II and

the Bull NovaScale R410B F2 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R210 II model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 121**

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2011

**Hardware Availability:** May-2011

**Software Availability:** Jan-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate2006 = 121**

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2011

**Hardware Availability:** May-2011

**Software Availability:** Jan-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 121**

PowerEdge R210 II (Intel Xeon E3-1280, 3.50 GHz)

**SPECfp\_rate\_base2006 = 117**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

465.tonto (continued):

```
-B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
              -static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:39:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 May 2011.