



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp®_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001


Test date: Jul-2011

Test sponsor: Itaotec

Hardware Availability: Feb-2011

Tested by: Itaotec

Software Availability: Jan-2011

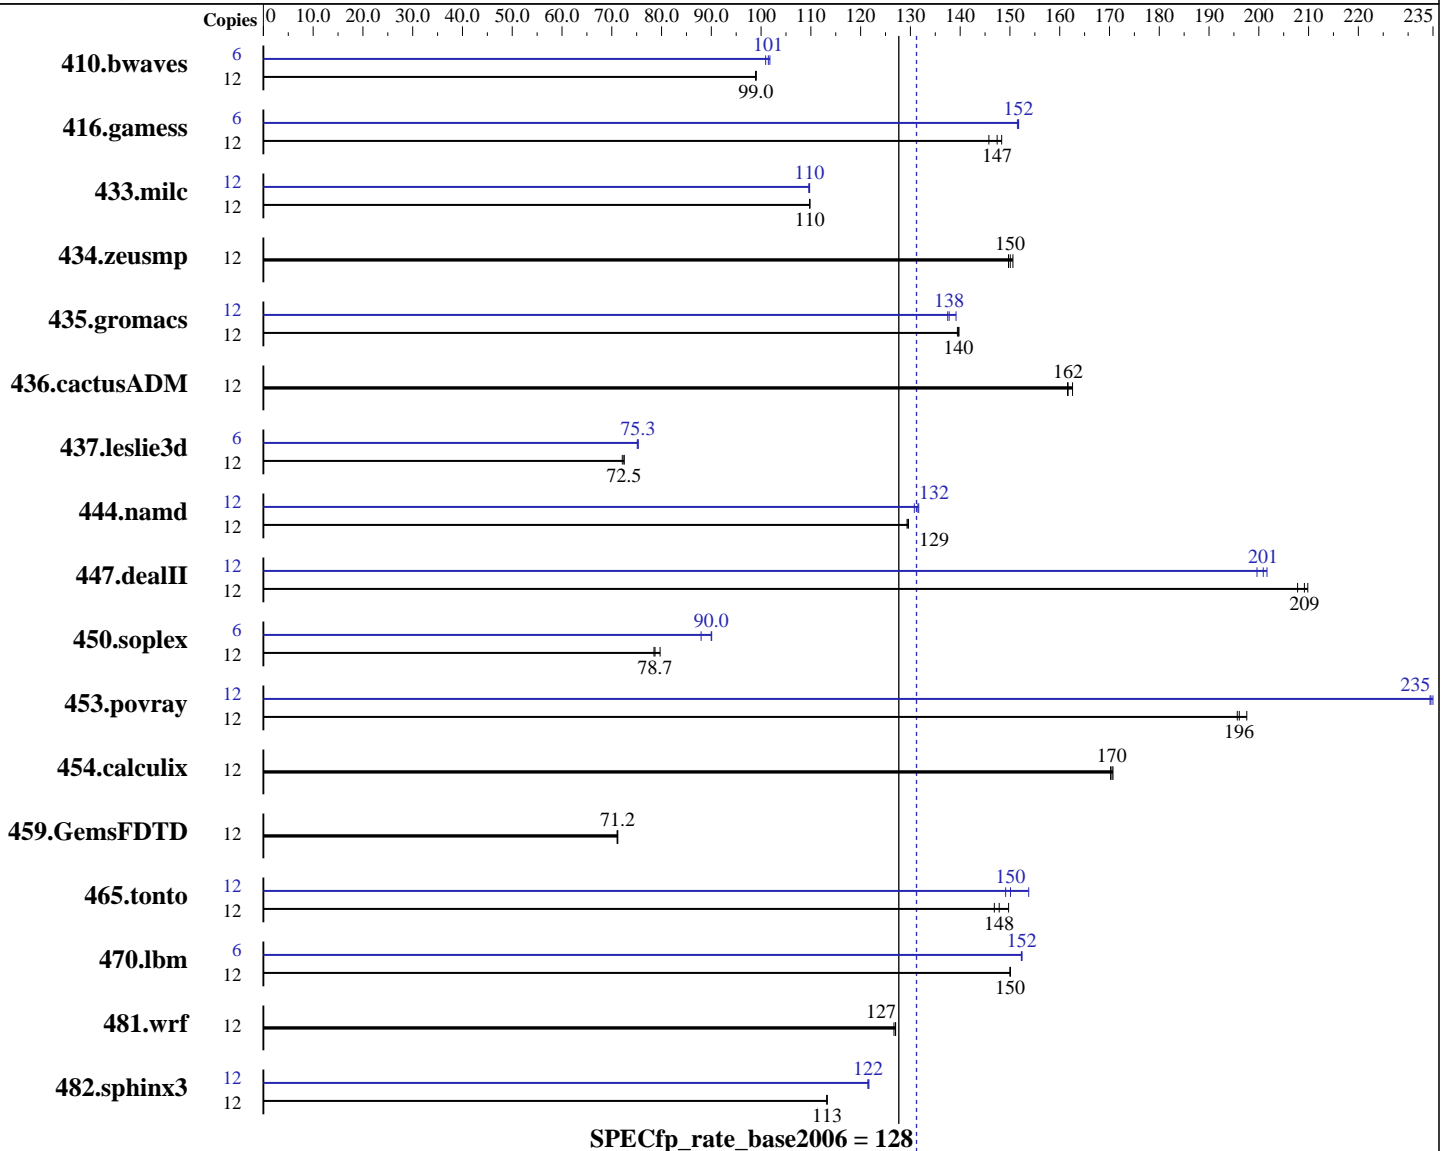

SPECfp_rate2006 = 131

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jul-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1647	99.0	1648	99.0	1649	98.9	6	801	102	804	101	808	101
416.gamess	12	1594	147	1584	148	1612	146	6	774	152	774	152	775	151
433.milc	12	1003	110	1003	110	1004	110	12	1004	110	1004	110	1005	110
434.zeusmp	12	729	150	728	150	725	151	12	729	150	728	150	725	151
435.gromacs	12	613	140	614	140	614	139	12	616	139	622	138	623	137
436.cactusADM	12	882	163	888	162	887	162	12	882	163	888	162	887	162
437.leslie3d	12	1557	72.5	1564	72.1	1557	72.5	6	749	75.3	749	75.3	751	75.1
444.namd	12	742	130	743	129	744	129	12	731	132	736	131	732	132
447.dealII	12	661	208	656	209	654	210	12	681	202	683	201	688	200
450.soplex	12	1275	78.5	1272	78.7	1256	79.7	6	569	87.9	556	90.0	556	90.1
453.povray	12	326	196	323	198	326	196	12	272	234	272	235	272	235
454.calculix	12	581	170	580	171	582	170	12	581	170	580	171	582	170
459.GemsFDTD	12	1792	71.1	1789	71.2	1788	71.2	12	1792	71.1	1789	71.2	1788	71.2
465.tonto	12	804	147	789	150	799	148	12	787	150	792	149	768	154
470.lbm	12	1099	150	1099	150	1099	150	6	541	152	541	152	541	152
481.wrf	12	1058	127	1055	127	1055	127	12	1058	127	1055	127	1055	127
482.sphinx3	12	2065	113	2066	113	2065	113	12	1925	121	1925	122	1922	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jul-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

General Notes

This result was measured on the Servidor Itaotec MX224.
The Servidor Itaotec MX203+, Servidor Itaotec MX223+ and the Servidor Itaotec MX224 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jul-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jul-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 131

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECfp_rate_base2006 = 128

CPU2006 license: 9001

Test sponsor: Itaotec

Tested by: Itaotec

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:23:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2011.