



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2609, 2.40 GHz

SPECint®2006 = 36.5

SPECint_base2006 = 34.9

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

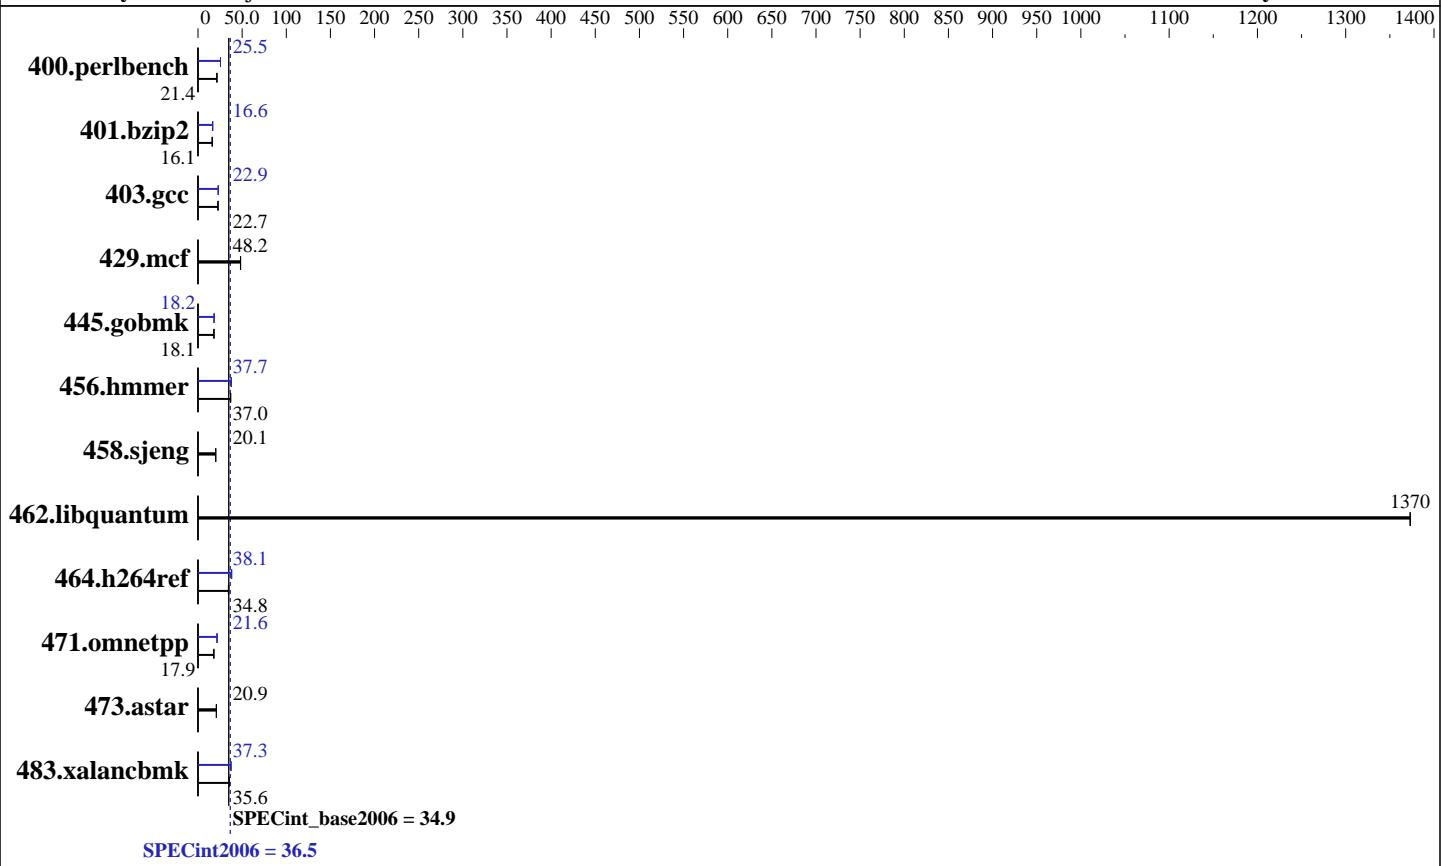

Hardware

CPU Name:	Intel Xeon E5-2609
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1067 MHz and CL7)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	PRIMERGY SX940 S1 for hw_disk

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2609, 2.40 GHz

SPECint2006 = 36.5

SPECint_base2006 = 34.9

CPU2006 license: 19

Test date: Feb-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	456	21.4	456	21.4	457	21.4	384	25.4	383	25.5	384	25.5
401.bzip2	599	16.1	598	16.1	599	16.1	581	16.6	581	16.6	581	16.6
403.gcc	355	22.7	356	22.6	355	22.7	351	22.9	351	22.9	352	22.8
429.mcf	190	48.1	189	48.2	189	48.3	190	48.1	189	48.2	189	48.3
445.gobmk	580	18.1	580	18.1	580	18.1	576	18.2	576	18.2	576	18.2
456.hmmer	252	37.0	252	37.0	253	36.9	248	37.7	248	37.7	248	37.7
458.sjeng	603	20.1	604	20.0	603	20.1	603	20.1	604	20.0	603	20.1
462.libquantum	15.1	1370	15.1	1370	15.1	1370	15.1	1370	15.1	1370	15.1	1370
464.h264ref	644	34.4	636	34.8	636	34.8	580	38.1	589	37.5	580	38.2
471.omnetpp	346	18.1	351	17.8	350	17.9	288	21.7	289	21.6	292	21.4
473.astar	336	20.9	336	20.9	339	20.7	336	20.9	336	20.9	339	20.7
483.xalancbmk	193	35.7	195	35.3	194	35.6	185	37.3	185	37.4	185	37.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Frequency Floor Override = Enable

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/SPECcpu2006/lib32:/SPECcpu2006/lib64"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2609, 2.40 GHz

SPECint2006 = 36.5

SPECint_base2006 = 34.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2609, 2.40 GHz

SPECint2006 = 36.5

SPECint_base2006 = 34.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hmmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`
`-ansi-alias`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2609, 2.40 GHz

SPECint2006 = 36.5

SPECint_base2006 = 34.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:32:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2012.