



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

### SPECfp®\_rate2006 = 494

### Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

### SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019


Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

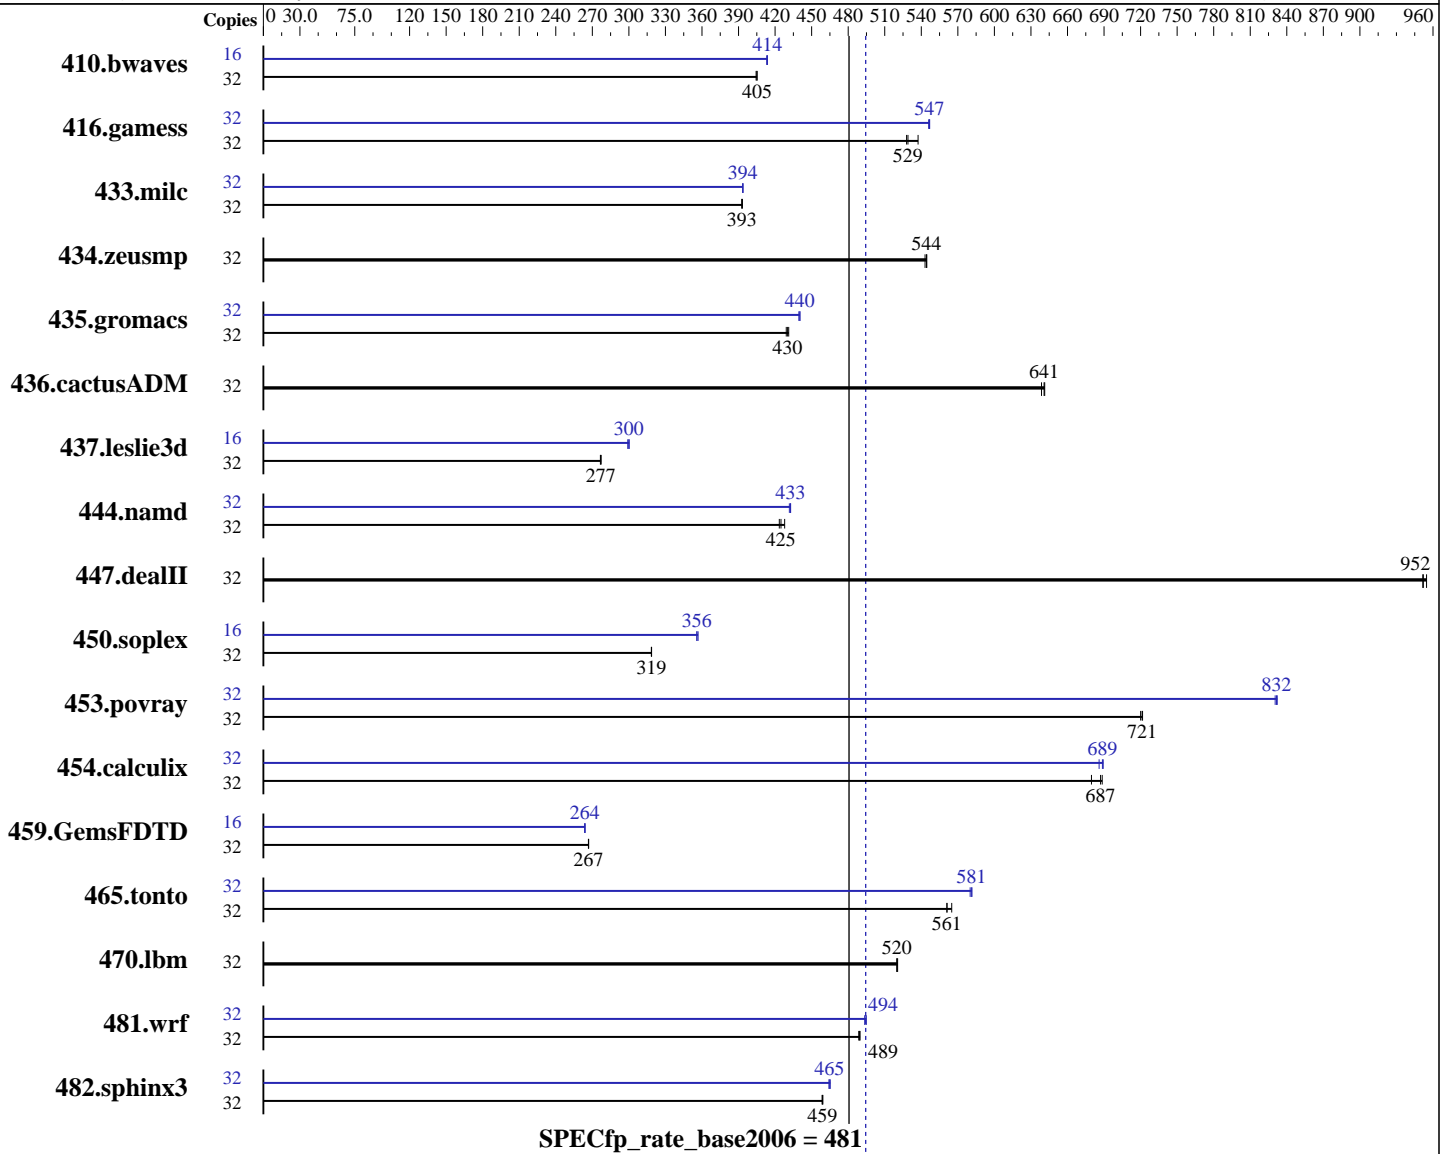

#### Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>1073</b>	<b>405</b>	1075	404	1073	405	16	<b>526</b>	<b>414</b>	526	413	526	414
416.gamess	32	<b>1184</b>	<b>529</b>	1187	528	1166	537	32	<b>1146</b>	<b>547</b>	1146	547	1147	546
433.milc	32	748	393	<b>748</b>	<b>393</b>	747	393	32	746	394	<b>746</b>	<b>394</b>	747	393
434.zeusmp	32	<b>535</b>	<b>544</b>	535	544	536	543	32	<b>535</b>	<b>544</b>	535	544	536	543
435.gromacs	32	<b>531</b>	<b>430</b>	532	429	530	431	32	520	440	519	440	<b>519</b>	<b>440</b>
436.cactusADM	32	<b>597</b>	<b>641</b>	596	641	599	639	32	<b>597</b>	<b>641</b>	596	641	599	639
437.leslie3d	32	<b>1086</b>	<b>277</b>	1085	277	1087	277	16	503	299	<b>502</b>	<b>300</b>	501	300
444.namd	32	600	428	<b>604</b>	<b>425</b>	606	423	32	594	432	593	433	<b>593</b>	<b>433</b>
447.dealII	32	<b>385</b>	<b>952</b>	385	952	383	955	32	<b>385</b>	<b>952</b>	385	952	383	955
450.soplex	32	838	319	838	318	<b>838</b>	<b>319</b>	16	374	357	375	356	<b>375</b>	<b>356</b>
453.povray	32	<b>236</b>	<b>721</b>	236	722	236	720	32	205	832	205	830	<b>205</b>	<b>832</b>
454.calculix	32	383	689	388	680	<b>384</b>	<b>687</b>	32	385	686	<b>383</b>	<b>689</b>	383	689
459.GemsFDTD	32	1273	267	<b>1272</b>	<b>267</b>	1272	267	16	644	264	<b>643</b>	<b>264</b>	643	264
465.tonto	32	<b>561</b>	<b>561</b>	561	561	557	565	32	543	580	<b>542</b>	<b>581</b>	541	582
470.lbm	32	846	520	<b>845</b>	<b>520</b>	845	521	32	846	520	<b>845</b>	<b>520</b>	845	521
481.wrf	32	<b>731</b>	<b>489</b>	731	489	730	490	32	724	494	722	495	<b>724</b>	<b>494</b>
482.sphinx3	32	1360	459	1358	459	<b>1359</b>	<b>459</b>	32	1340	465	<b>1343</b>	<b>465</b>	1343	464

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Intel(R) Hyper-Threading Technology set to Enabled  
Processor Power State C6 set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

### Platform Notes (Continued)

```

Processor Power State C1 Enhanced set to Disabled
Power Technology set to Custom
Energy Performance set to Performance
DRAM Clock Throttling set to Performance
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on speccpu-rhel6.2 Sat Apr 14 06:15:18 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132100640 kB
HugePages_Total:       0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux speccpu-rhel6.2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 14 06:05

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       ext4      274G  10G  250G   4% /

```

Additional information from dmidecode:

```

Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static  
 -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
 -opt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS C220 M3 (Intel Xeon E5-2680 2.7 GHz)

SPECfp\_rate\_base2006 = 481

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:42:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2012.