



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 162

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 55


Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

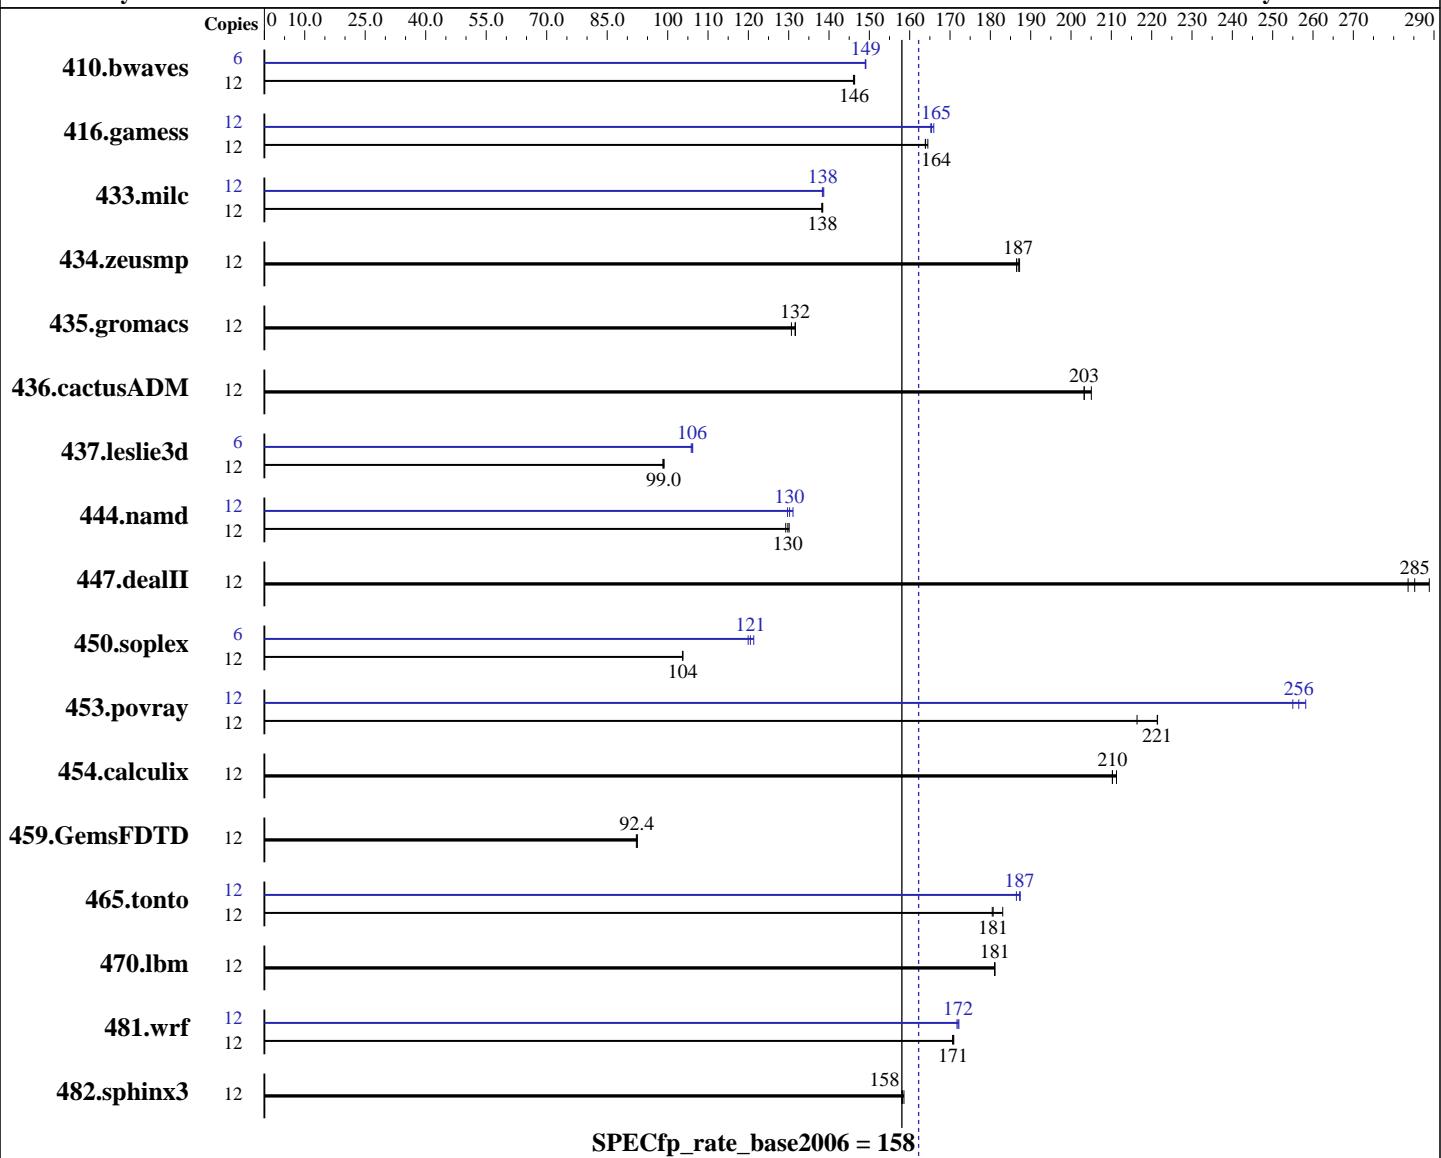

SPECfp_rate_base2006 = 158

SPECfp_rate2006 = 162

Hardware

CPU Name: Intel Xeon E5-2430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (add definition here)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 162

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (3 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 300 GB 15000 RPM SAS, RAID 1
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1114	146	<u>1115</u>	<u>146</u>	1117	146	6	<u>547</u>	<u>149</u>	547	149	547	149	547	149
416.gamess	12	1428	164	<u>1433</u>	<u>164</u>	1434	164	12	1416	166	1422	165	<u>1420</u>	<u>165</u>		
433.milc	12	797	138	796	138	<u>796</u>	<u>138</u>	12	796	138	794	139	<u>795</u>	<u>138</u>		
434.zeusmp	12	583	187	586	186	<u>584</u>	<u>187</u>	12	583	187	586	186	<u>584</u>	<u>187</u>		
435.gromacs	12	651	132	656	131	<u>651</u>	<u>132</u>	12	651	132	656	131	<u>651</u>	<u>132</u>		
436.cactusADM	12	699	205	<u>705</u>	<u>203</u>	706	203	12	699	205	<u>705</u>	<u>203</u>	706	203		
437.leslie3d	12	<u>1140</u>	<u>99.0</u>	1142	98.8	1138	99.1	6	533	106	<u>532</u>	<u>106</u>	531	106		
444.namd	12	740	130	745	129	<u>741</u>	<u>130</u>	12	<u>739</u>	<u>130</u>	742	130	734	131		
447.dealII	12	475	289	484	284	<u>481</u>	<u>285</u>	12	475	289	484	284	<u>481</u>	<u>285</u>		
450.soplex	12	965	104	<u>965</u>	<u>104</u>	965	104	6	<u>415</u>	<u>121</u>	412	121	417	120		
453.povray	12	295	216	288	221	<u>288</u>	<u>221</u>	12	247	258	<u>249</u>	<u>256</u>	250	255		
454.calculix	12	<u>471</u>	<u>210</u>	469	211	471	210	12	<u>471</u>	<u>210</u>	469	211	471	210		
459.GemsFDTD	12	<u>1378</u>	<u>92.4</u>	1377	92.5	1380	92.2	12	<u>1378</u>	<u>92.4</u>	1377	92.5	1380	92.2		
465.tonto	12	<u>653</u>	<u>181</u>	645	183	654	180	12	<u>631</u>	<u>187</u>	630	187	633	186		
470.lbm	12	911	181	910	181	<u>910</u>	<u>181</u>	12	911	181	910	181	<u>910</u>	<u>181</u>		
481.wrf	12	<u>785</u>	<u>171</u>	786	171	784	171	12	<u>779</u>	<u>172</u>	781	172	778	172		
482.sphinx3	12	<u>1478</u>	<u>158</u>	1475	159	1480	158	12	<u>1478</u>	<u>158</u>	1475	159	1480	158		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
 Memory Frequency set to Maximum Performance
 Turbo Boost set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 162

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on Defy Wed Mar 14 23:41:01 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 24559976 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 11 (x86_64)

VERSION = 11

PATCHLEVEL = 2

uname -a:

Linux Defy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 14 10:13 last=S

SPEC is set to: /root/CPU2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext3	266G	22G	231G	9%	/

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 162

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate2006 = 162

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate2006 = 162

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 162

PowerEdge R320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:10:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.