



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint®2006 = 52.6**

**SPECint\_base2006 = 48.6**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

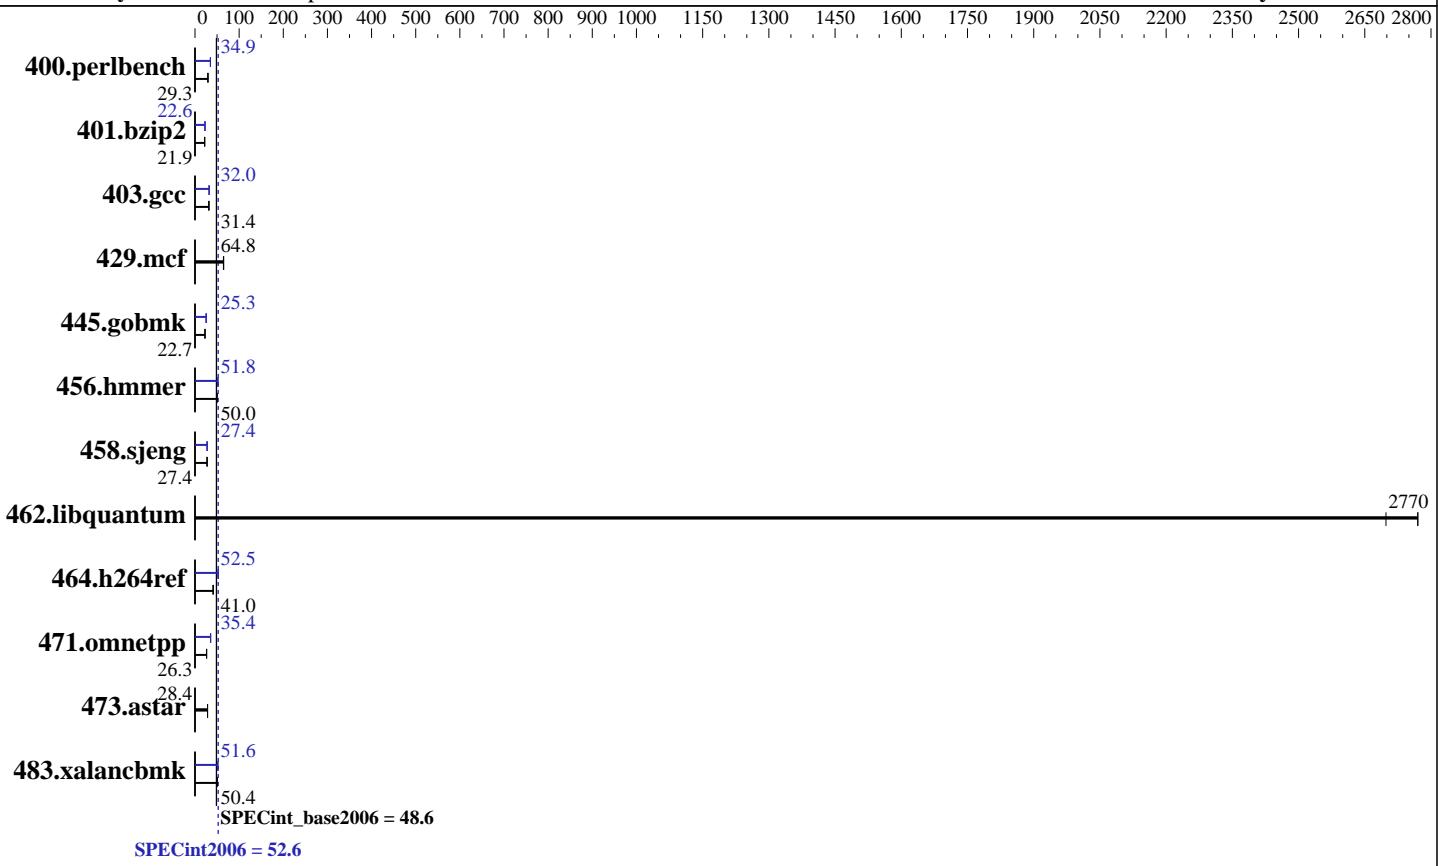

### Hardware

CPU Name: Intel Xeon E5-4650  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2700  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2,3,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint2006 = 52.6**

**SPECint\_base2006 = 48.6**

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: Aug-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	331	29.5	<b>334</b>	<b>29.3</b>	335	29.1	<b>280</b>	<b>34.9</b>	280	34.9	279	35.0
401.bzip2	441	21.9	<b>441</b>	<b>21.9</b>	441	21.9	<b>426</b>	<b>22.6</b>	427	22.6	426	22.6
403.gcc	<b>256</b>	<b>31.4</b>	256	31.4	256	31.5	<b>252</b>	<b>32.0</b>	<b>252</b>	<b>32.0</b>	251	32.0
429.mcf	142	64.4	141	64.9	<b>141</b>	<b>64.8</b>	<b>142</b>	<b>64.4</b>	141	64.9	<b>141</b>	<b>64.8</b>
445.gobmk	463	22.7	<b>463</b>	<b>22.7</b>	463	22.7	<b>415</b>	<b>25.3</b>	415	25.3	414	25.3
456.hmmer	186	50.1	187	49.8	<b>187</b>	<b>50.0</b>	<b>180</b>	<b>51.8</b>	180	51.8	180	51.8
458.sjeng	443	27.3	442	27.4	<b>442</b>	<b>27.4</b>	<b>442</b>	<b>27.4</b>	441	27.4	<b>441</b>	<b>27.4</b>
462.libquantum	<b>7.48</b>	<b>2770</b>	7.68	2700	7.48	2770	<b>7.48</b>	<b>2770</b>	7.68	2700	7.48	2770
464.h264ref	<b>539</b>	<b>41.0</b>	540	41.0	533	41.5	<b>422</b>	<b>52.5</b>	422	52.4	422	52.5
471.omnetpp	237	26.3	<b>238</b>	<b>26.3</b>	238	26.2	<b>176</b>	<b>35.4</b>	177	35.3	<b>177</b>	<b>35.4</b>
473.astar	247	28.4	246	28.5	<b>247</b>	<b>28.4</b>	<b>247</b>	<b>28.4</b>	246	28.5	<b>247</b>	<b>28.4</b>
483.xalancbmk	137	50.3	136	50.6	<b>137</b>	<b>50.4</b>	<b>134</b>	<b>51.6</b>	133	51.8	<b>134</b>	<b>51.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3  
running on congo-pete Sat Jul 14 04:22:44 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint2006 = 52.6**

**SPECint\_base2006 = 48.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:       264501792 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux congo-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 2 16:40

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_congopete-lv_root
                  ext4   264G   5.9G   245G   3%  /


Additional information from dmidecode:
Memory:
 32x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64"

OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint2006 = 52.6**

**SPECint\_base2006 = 48.6**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint2006 = 52.6**

**SPECint\_base2006 = 48.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Peak Compiler Invocation (Continued)

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias
```

```
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias
```

```
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
               -opt-malloc-options=3 -auto-ilp32
```

429.mcf: basepeak = yes

```
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias
```

```
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias
```

```
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll14
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4650, 2.70 GHz)

**SPECint2006 = 52.6**

**SPECint\_base2006 = 48.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
                -Wl,-z,muldefs -L/smartheap -lsmartheap
```

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:00:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 August 2012.